

REV. Status

AC-DC UL/CSA ADAPTOR DC 9V 1200mA

REVISION -
02/21/92 YN

- A. Electrical specifications
1. Input voltage: AC 120V ±10% 60 Hz ±0.5 Hz
 2. Output voltage and current: DC 9V at 1200mA

REVISION A
TEMECULA
WAS CARSON
UPDATED FORMAT
6/9/95 DS

V _{in}	100% Load	120mA Load
108	7.1 VDC MIN	-
120	8.4-9.6 VDC	13.4 VDC MAX
132	-	15.0 VDC MAX

REVISION B
ADDED REF...
MATING CONN.
04/02/96 DS

NOTE: Specification applies after 10 minutes warm-up with 1200mA load and at any operating temperature.

REVISION C
REFORMATTED
REVISED TITLE
ADDED NAMEPLATE
09/12/96 DS



3. Operating temperature: 0 ° C to +40 ° C
4. Storage temperature: -20 ° C to +85 ° C
5. Operating and Storage Humidity: 0 to 95% without condensation
6. Withstand voltage: AC 1500Vrms 1 minute @ input to output

B. Typical performance data test Condition:
T_a= +25 °C measured after 10 minute warm-up with input at 120V 60Hz

C. Safety agencies


UL File No. E82180
UL approved as a battery charger
CSA File No. LR38236

D. Nameplate: Information is as follows:
Metallic letters on a black background

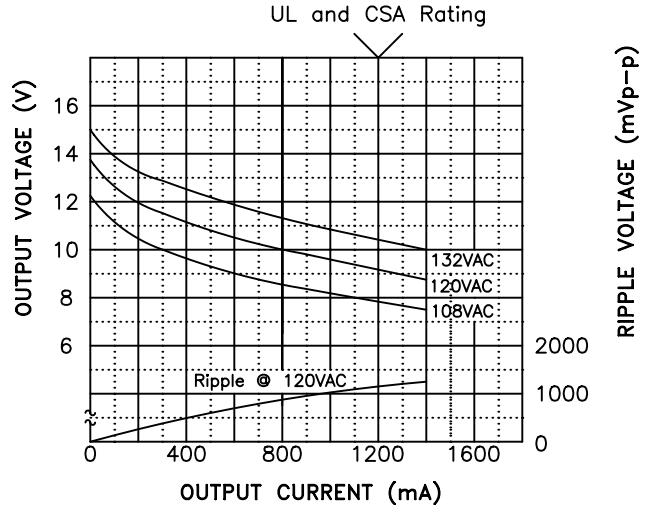

E. Mechanical Specifications

All dimensions shown are nominal unless otherwise specified

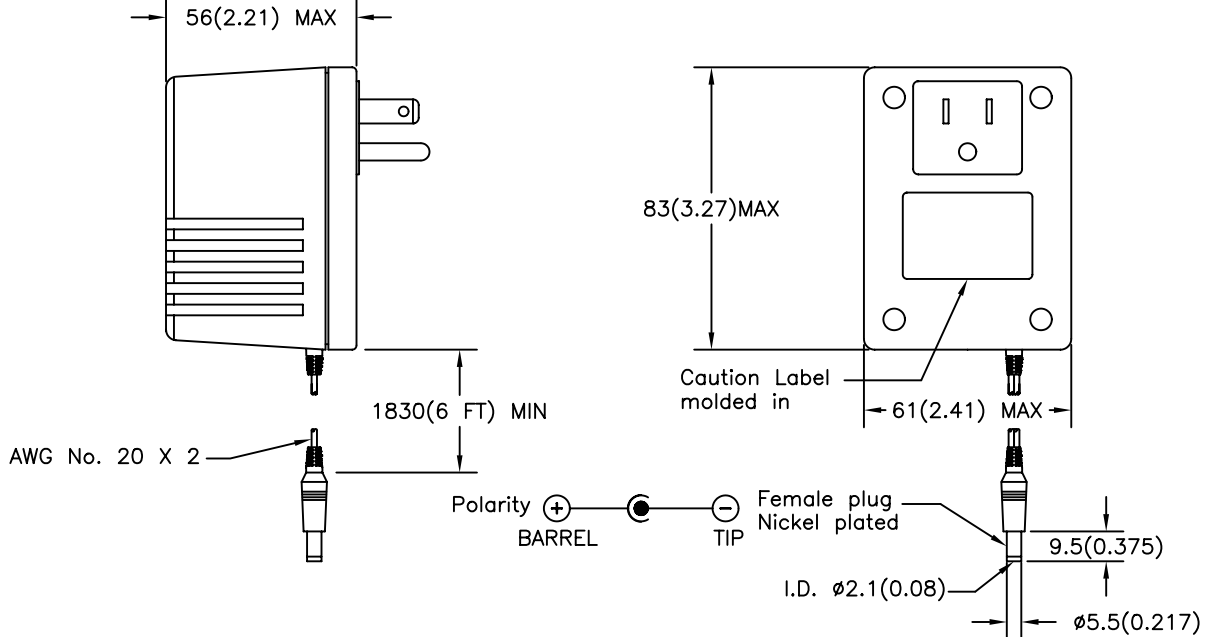

REFERENCE: MATING CONNECTOR 722A SWITCHCRAFT HEC0470-01-230 HOSHIDEN

PREPARED BY:

K. Brennan

ENGINEER:

D. Suzuki

QUALITY CONTROL:

D. Kelley

APPROVED:

D. Kelley

DRAWING CONTROL NO.
P-A7-00047
ACAD\PS\A7000471.DWG

REV
C

MODEL DESCRIPTION
UL/CSA DC 9V 1200mA
POWER SUPPLY

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

MODEL SPECIFICATION

825A4620G

DIM: mm(In) SCL: NONE SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.