
REV. Status

REVISION —
12/12/95 TS

REVISION A ADDED RoHS 12/01/05 MP AUDIO COUPLING MINIATURE ENCAPSULATED TRANSFORMER DESIGNED TO OPERATE 10mW MAX IN PRIMARY AND REFLECT A PRIMARY SOURCE IMPEDANCE OF APPROXIMATELY 200K Ω CT WITH 1K Ω CT LOAD ON SECONDARY.

- A. Electrical Specifications (@ 20 ° C)
 - 1. Pri Source Impedance; $200K\Omega$ CT
 - 2. Sec Load Impedance; 1KΩ CT
 - 3. Pri DC Current; 0 mA MAX
 - 4. Operating Level; 10mW MAX @ 300 Hz
 - 5. Frequency Response (relative to 1 KHz); ±2.0 dB, @ 300 Hz to 100 KHz
 - 6. Longitudinal Balance; 60 dB MIN @ 1 KHz
 - 7. DC Resistance;
 - (1-3) 5300 Ω ±20% (4-6) 120 Ω ±20%
 - 8. Turns Ratio; (1-3): (4-6) = 14.1 : 1 ±2%
 - 9. Dielectric Strength;
 - 500 Vrms 0.5 minute @ Pri Sec
- B. Marking; MET-01, TAMURA, Primary and Secondary Impedance, PM3-M, MICROTRAN, TF5S21ZZ, date code and country of origin

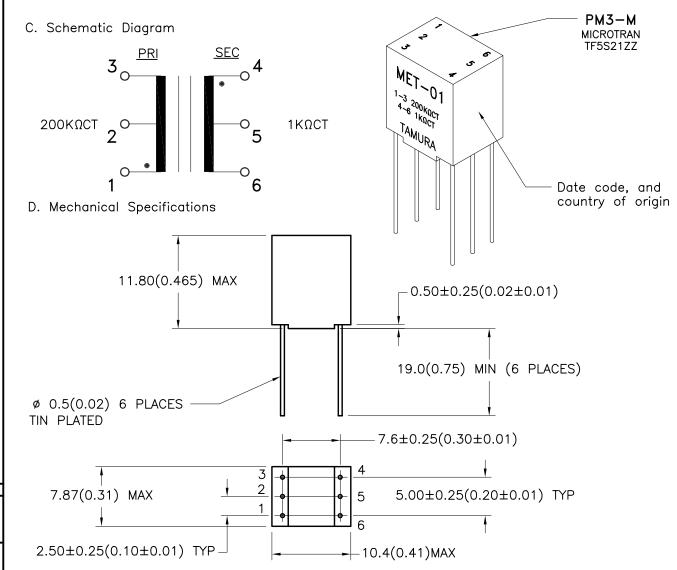

TOLERANCES (mm) $\leq 4 \pm 0.2$ $4 \leq 20 \pm 0.3$ $20 \leq 50 \pm 0.4$ PREPARED BY:

LC DDENILLAN

K. BRENNAN ENGINEER:

M. PITCHAI

QUALITY CONTROL:

T. CLEM

М

CONTENTS OF THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

P-A1-11490

ACAD\MET\A1114901.DWG

CONTROL NO. REV

AUDIO COUPLING

MINIATURE ENCAPSULATED TRANSFORMER

TAMURA CORPORATION OF AMERICA

TAMURA CORPORATION OF AMERICA 43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624 (951) 699-1270 FAX 9516769482 MET-01

MODEL SPECIFICATION

DIM: mm(In) SCL: 2/1 SH: 1 0F 1

APPROVED:

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.