


## 2330QD, 2332QD and 2390QD Series Non-Relampable Neon-Incandescent Indicator Lights

### Description and Features

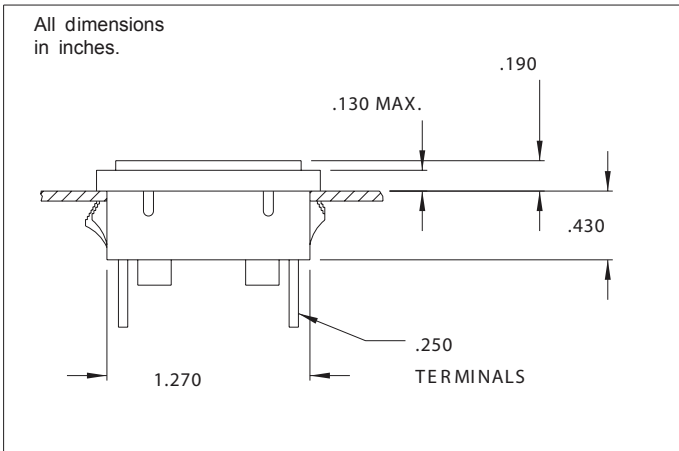

**Mounting:** Will snap-fit into Ø.032/.100 thick panels, use speednut for other panel thicknesses. Available with speednut SN1963. Mounting hole pattern on page SP3.

**Terminals:** Quick-connect, tinned brass .187 x .020

**Lens:** Polycarbonate

**Bezel:** Polished stainless steel. For black finish add "X" after the series letter(s).

Lens Color	Neon	Incandescent
	Model No. (105-125VAC) .250 Terminals	Model No. (28V) .250 Terminals
Red	2330QD1	2390QD1-28V
Amber	2330QD3	2390QD3-28V
White	2330QD4	2390QD4-28V
Green	2332QD5*	2390QD5-28V
Lamp used	C6A+Resistor	#2187

\*Incorporates G2B lamp and resistor  
Underwriters Laboratories (UL) File No. E20325  
Canadian Standards Association (CSA) File No. LR13346