

Double your media conversion capabilities with the IE-iMcV-2xLIM SNMP-manageable media converter modules.

Features and Benefits

Cost-effective and flexible

- Functions as two independent copper to fiber media converters, thus doubling port density in the iMediaChassis and MediaChassis product lines
- Low latency reduces issues with latency-sensitive applications (e.g., client server, VoIP, video, etc.)
- Interchangeable SFP modules allow for multiple fiber type conversion options (single-mode, multi-mode, long haul, short haul, etc.)
- Extended operating temperatures
- Ideal for use with IMC Networks' MSA or Cisco Compliant SFPs

Maximizes network uptime

- 100 Mbps SFPs and 2xLIM modules are hot-swappable; no need to power-down chassis when upgrading or troubleshooting a single module

IMC's managed chassis line allows for easy configuration when used with GUI-based iView²

- Monitor links and receive vital traffic, health information and notification should problems occur
- SNMP v1 and V2c compatible

Eases Troubleshooting

- *Far End Fault* provides notification of Far End Link Loss on the fiber port.
- *Link Fault Pass-Through (LFPT)* is a troubleshooting feature that monitors the copper (TXLL) and fiber (FXLL) ports of the unit; if a port loses LINK, the unit disables the transmitting signal on the other port and notifies the user via LED
- *Config Control* retains the latest module configuration if it's replaced, regardless of how the initial configuration was setup; whether by DIP Switch or SNMP Management Module
- Compatible with Digital Diagnostics Monitoring Interface (DDMI) on select SFPs




* SFPs sold separately

The IE-iMcV-2xLIM, TX/SFP is a Fast Ethernet module which provides two conversions of 100Base-TX twisted pair to 100Base-FX/SX single-mode or multi-mode fiber. There are two sets of ports, RJ-45 (copper) and SFP (fiber). The SFP port supports all MSA and Cisco compliant, SC, LC and single-fiber 155 Mbps SFPs. Designed as a Layer 1 device, the IE-iMcV-2xLIM is entirely transparent to both Layer 2 and Layer 3 protocols. The IE-iMcV-2xLIM is SNMP-manageable and can be installed into the modular, SNMP-manageable iMediaChassis or the MediaChassis series.

Easily configure and manage converters with the GUI-based iView². As an SNMP management application, iView² gives network managers the ability to monitor and control IMC Networks' products. iView² runs standalone on Windows NT/XP/2000 or as a Web Server running under IIS. For assistance in selecting the right version of iView² for your operating system, visit our web site at: <http://www.imcnetworks.com/Products/iView2.cfm>

Application Example

Populating a iMediaChassis/20 with 20 IE-iMcV-2xLIM modules doubles the number of lines that can be served in an ISP network environment at a lower cost. Additionally, it improves remote management through the use of the FEF and LFPT functions and through DDMI on select SFPs.

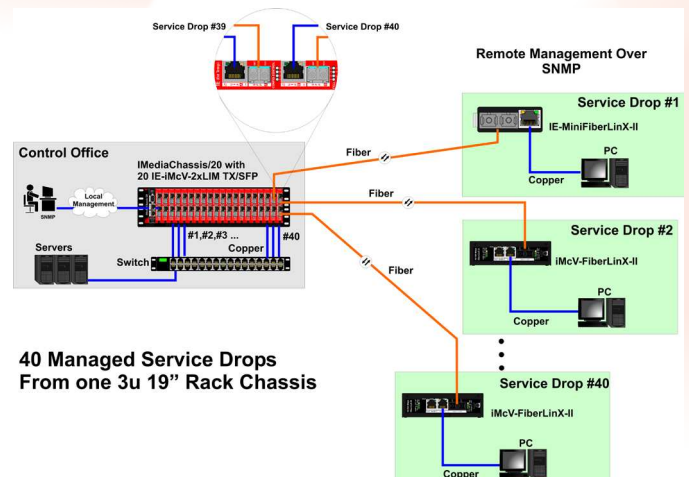

MEDIA CONVERSION

Technical Specifications

- 2 x RJ-45 and 2 x SFP ports (SFPs sold separately)
- IEEE 802.3u 100Base-T over twisted pair
- IEEE 802.3u 100Base-FX or SX over twisted pair
- AutoCross for MDI/MDIX
- LinkLoss, Far End Fault & Auto Negotiation
- Link Fault Pass-Through (LFPT)
- Supports Config Control
- MDI/MDIX switch
- DIP Switch selectable Auto Negotiation on copper port
- Features low latency
- Supports Half- and Full-Duplex operation
- Supports Jumbo packets (No size limit)
- Install in any iMediaChassis or MediaChassis
- Supports GUI-Based iView²
- Includes diagnostic LEDs
- Hot-swappable architecture

Shipping Weight:

0.30 lbs (.11 kg)

Regulatory Approvals:

- FCC Class B
- UL, CSA, CE
- TUV

Standards Compliance

SFP-MSA SFP standard (September 14, 2000)

SFF-8472 DDMI standard (Revision 1.0)

IEEE 802.3

Operating Temperature:

-40° F to +176° F (-40° C to +80° C)

5% to 95% (non-condensing), 0 – 10,000 ft. altitude

Storage Temperature:

-40° F to +176° F (-40° C to +80° C);

5% to 95% (non-condensing)

Input Voltage:

100 to 240 VAC 50/60Hz (External Power Supply)

5 VDC ± 5%

Power Information:

Max Current: 0.80A

Fiber Optics Specifications

For each product listed below in the Ordering Information section, the DISTANCE represents an approximate fiber distance based on industry-standard fiber attenuation specifications. Actual distances will vary for each installation. For complete power budgets and information on calculating specific distances, visit www.imcnetworks.com/go/fcs or contact IMC Networks Fiber Consulting Services at 949-465-3000.

Ordering Information

PART NUMBER	DESCRIPTION	DISTANCE
IE-iMcV-2xLIM, TX/SFP Modules		
850-18610	IE-iMcV-2xLIM, TX/SFP (requires two SFP/155 Modules) [§]	Varies

[§] SFP modules are sold separately. For more information on IMC Networks' SFPs, go to: www.imcnetworks.com/Products/product.cfm?family=32

IE-SFP Modules: 100 to 155 Mbps

PART NUMBER	PART NUMBER	PORT DESCRIPTION	FIBER	DISTANCE	POWER BUDGET
W/ DDMI	W/O DDMI				(db)
808-38101	808-38111	MM850	LC	2 km	14.5
808-38102	808-38112	MM1300	LC	2 km	11
808-38103	808-38113	SM1310	LC	20 km	21
808-38104	808-38114	SM1310/PLUS	LC	40 km	31
808-38105	808-38115	SM1550/LONG	LC	80 km	31
808-38525	808-38535	SSFX-SM1310/1550/LONG	LC	60 km	31
808-38526	808-38536	SSFX-SM1550/1310/LONG	LC	60 km	31



IMC Networks

Headquarters

19772 Pauling
Foothill Ranch, CA 92610
TEL: 949-465-3000
FAX: 949-465-3020
sales@imcnetworks.com

IMC Networks

Europe

Herseltsesteenweg 268
B-3200 Aarschot, Belgium
TEL: +32-16-550880
FAX: +32-16-550888
eurosales@imcnetworks.com

IMC Networks

Eastern US/Latin America

28050 U.S. Hwy. 19 North, Suite 306
Clearwater, FL 33761
TEL: 727-797-0300
FAX: 727-797-0331
latinsales@imcnetworks.com

IMC Networks

Fiber Consulting Services

For information call:
TEL: 949-465-3000
1-800-624-1070 (US/CAN)
+32-16-550880 (Europe)
fcs@imcnetworks.com

Copyright © 2012 IMC Networks. All rights reserved. The information in this document is subject to change without notice. IMC Networks assumes no responsibility for any errors that may appear in this document. Specific product names may be trademarks or registered trademarks and are the property of their respective companies.