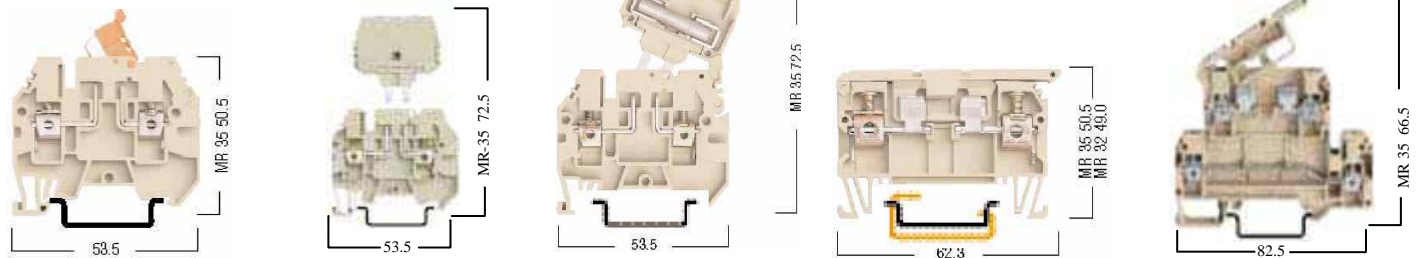







ERTD Series

Disconnect Terminals

Disconnect terminals allow open circuit without disconnecting the conductors by a disconnect busbar. In the disconnect, the disconnect busbar can be changed with a proper fuse to use as a fuse terminal. In ERTD4 terminals, disconnection is achieved by lifting the knife contact to provide clear functional advantage for devices having utility instruments and associated transformers.



		ERTD4 width: 6mm 353 100i BEIGE			ERTD3M width: 6mm 362 000i BEIGE			ERTD3M width: 6mm 363 000i BEIGE			ERTD2 width: 6mm 360 110i BEIGE			ERTD4F width: 8mm 353 300i BEIGE						
Electrical ratings																				
Voltage/Current/Cross section		500V~/24A/4mm ²			500V~/24A/4mm ²			500V~/24A/4mm ²			500V~/24A/4mm ²			750V~/32A/4mm ²						
UL		600V~/16A/AWG 26-10			600~/10A/AWG 26-10			600V~/10A/AWG 26-10			300V~/6.3A/AWG 26-8									
Insulation stripping length		10mm			10mm			10mm			12mm			9mm						
Connection Data																				
Solid Strand, Screw Connection		0.5.....6mm ²			0.5.....6mm ²			0.5.....6mm ²			0.5.....10mm ²			0.5.....6mm ²						
Fine Strand, Screw Connection		1.5....4mm ²			1.5....4mm ²			1.5....4mm ²			1.5.....10mm ²			1.5....4mm ²						
AWG Conductor		26.....10			26.....10			26.....10			26.....8			24.....10						
Ordering Data																				
Type		Cat. No.	Qty	Type		Cat. No.	Qty	Type		Cat. No.	Qty	Type		Cat. No.	Qty					
Poliammide 6.6		ERTD4	353 100i	20	ERTD 3		362 000i	20	ERTD 3M		363 000i	20	ERTD 2		360 110i	20				
Mounting Rails																				
Type		Type			Type			Type			Type			Type						
MR32		MR 35 x 7.5			DINRAIL 1M-SLOT			1m	DINRAIL 1M-SLOT			1m	DINRAIL 1M-SLOT			1m	DINRAIL 1M-SLOT			1m
		Slotted Unslotted			DINRAIL 1M-UNSLLOT			1m	DINRAIL 1M-UNSLLOT			1m	DINRAIL 1M-UNSLLOT			1m	DINRAIL 1M-UNSLLOT			1m
					TS35x7.5 DINRAIL			2m	TS35x7.5 DINRAIL			2m	TS35x7.5 DINRAIL			2m	TS35x7.5 DINRAIL			2m
DIN EN 50035		DIN EN 50022			DINRAIL 1M-UNSLLOT			2m	DINRAIL 1M-UNSLLOT			2m	DINRAIL 1M-UNSLLOT			2m	DINRAIL 1M-UNSLLOT			2m
End Bracket																				
Type		Cat. No.	Qty	Type		Cat. No.	Qty	Type		Cat. No.	Qty	Type		Cat. No.	Qty					
		ES1	For MR35 & MR35 BEIGE	ES3	495 030i	100	ES3	495 030i	100	ES3	495 030i	100	ES3	495 030i	100					
		ES1	For MR35 BEIGE	ES1	495 040i	100	ES1	495 040i	100	ES1	495 040i	100	ES1	495 040i	100					
End Plate																				
Thickness 1.5mm		EPF3	450 050i	10	EPF3		450 050i	10	EPF3		450 050i	10	EPF2		450 040i	10	EPERD4F		450 200i	10
Polyamide 6.6																				
Cross-Connection																				
CCS 4/2		476 232i	25	CCS 4/2		476 232i	25	CCS 4/2		476 232i	25	CCS 4/2		476 232i	25					
CCS 4/3		476 233i	20	CCS 4/3		476 233i	20	CCS 4/3		476 233i	20	CCS 4/3		476 233i	20					
CCS 4/4		476 234i	15	CCS 4/4		476 234i	15	CCS 4/4		476 234i	15	CCS 4/4		476 234i	15					
CCS 4/10		476 239i	5	CCS 4/10		476 239i	5	CCS 4/10		476 239i	5	CCS 4/10		476 239i	5					
CC 6/2		476 242i	25	CC 6/2		476 242i	25	CC 6/2		476 242i	25	CC 6/2		476 242i	25					
CC 6/3		476 243i	20	CC 6/3		476 243i	20	CC 6/3		476 243i	20	CC 6/3		476 243i	20					
CC 6/4		476 244i	15	CC 6/4		476 244i	15	CC 6/4		476 244i	15	CC 6/4		476 244i	15					
CC 6/10		476 249i	5	CC 6/10		476 249i	5	CC 6/10		476 249i	5	CC 6/10		476 249i	5					
Group Marking																				
GM BEIGE		GM	496 110i	50	GM		496 110i	50	GM		496 110i	50	GM		496 110i	50	GM		496 110i	50