


REV.	REVISION	DATE

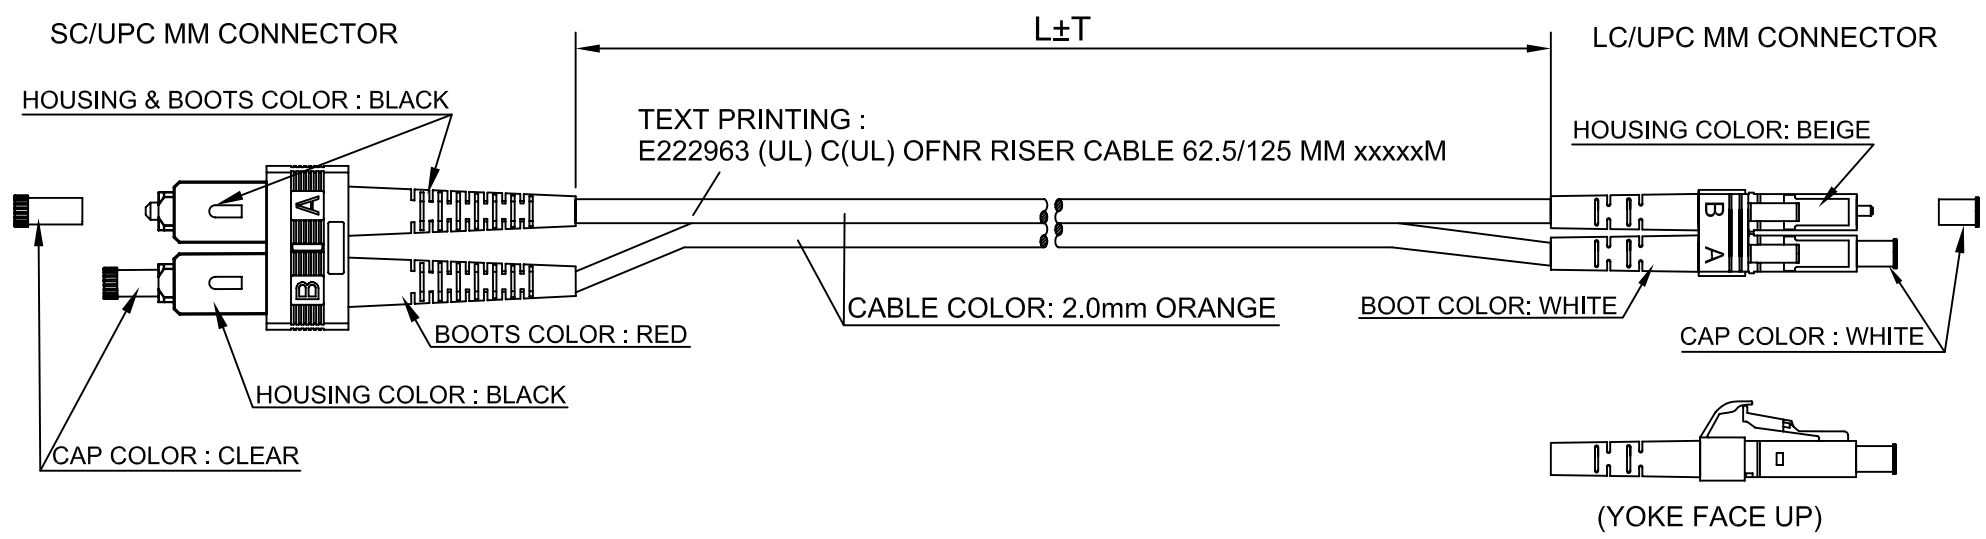

DFMM-SCLC-XX
 xxM SC/LC MM 62.5/125, DUPLEX RISER
 QTY. 1
www.bb-elec.com


DETAIL A

- NOTES:
1. INSERTION LOSS < 0.5dB.
 2. OPERATION TEMP: -20°C TO +60°C
 3. ORANGE PVC OUTER JACKET
 4. INDIVIDUALLY BAGGED AND LABELED, (SEE DETAIL A)

CHART

PART NO.	XX	L	T	BARCODE
DFMM-SCLC-10M	10	32.8'(10000)	+2"/-0(+50/-0)	
DFMM-SCLC-5M	5	16.4'(5000)	+2"/-0(+50/-0)	
DFMM-SCLC-3M	3	9.84'(3000)	+2"/-0(+50/-0)	
DFMM-SCLC-2M	2	6.56'(2000)	+2"/-0(+50/-0)	
DFMM-SCLC-1M	1	3.28'(1000)	+2"/-0(+50/-0)	

B&B Electronics Manufacturing Co.

	UNIT: Inches[mm]	TITLE: xxM DUPLEX 62.5/125 MULTIMODE LC/SC RISER JUMPER CABLE WITH CLIPS	
DRAWN BY A. MEDINA	DATE 09/18/2008	DRAWING NO. C.D. 2384	REV. A
CHECKED BY	DATE	REF:	
APPROVED BY	DATE	PART NO. DFMM-SCLC-XX	
P.O. NO.:	DATE		