


REV.	REVISION	DATE

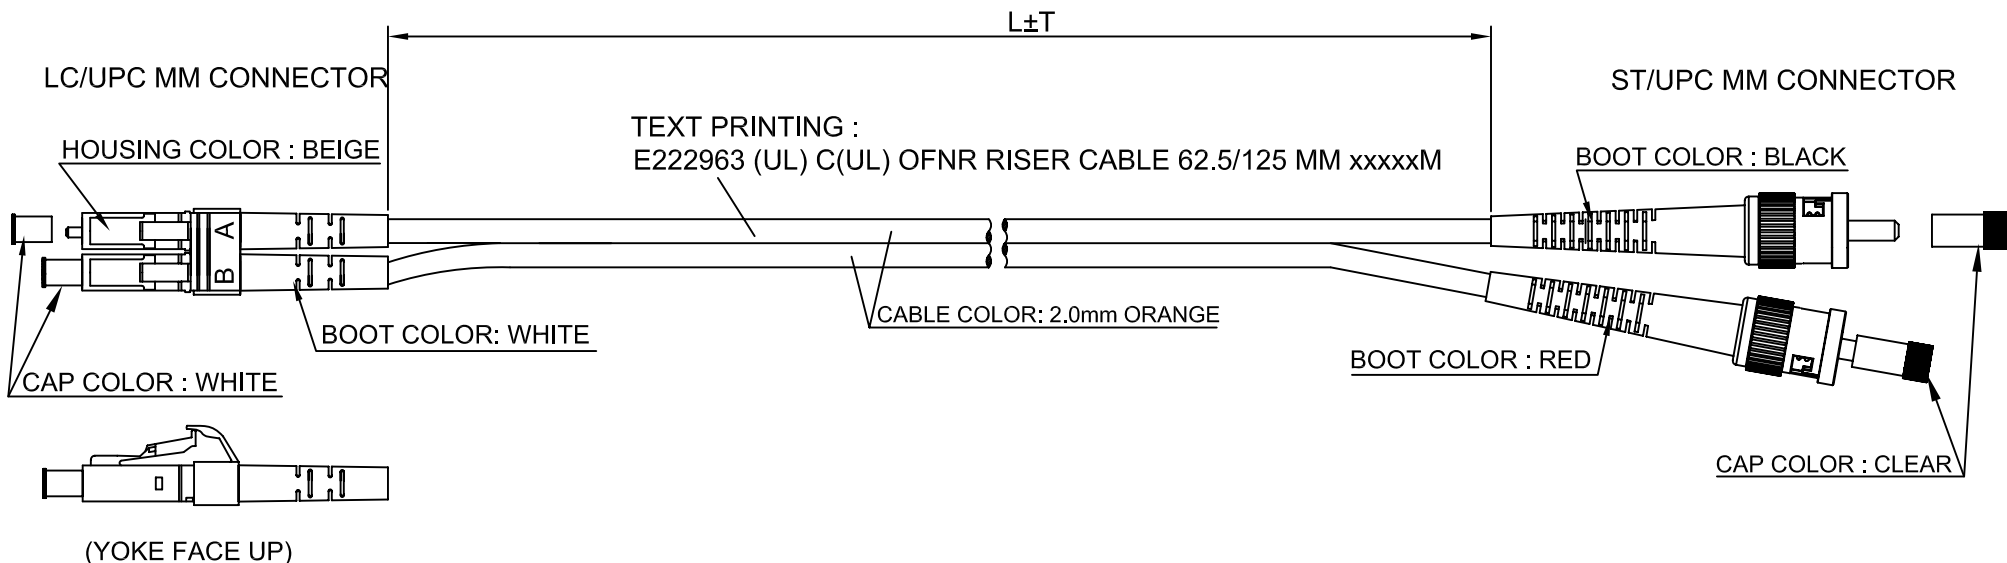

DFMM-STLC-XX
 xxM ST/LC MM 62.5/125, DUPLEX RISER
 QTY. 1
www.bb-elec.com


DETAIL A

- NOTES:
1. INSERTION LOSS < 0.5dB.
 2. OPERATION TEMP: -20°C TO +60°C
 3. ORANGE PVC OUTER JACKET
 4. INDIVIDUALLY BAGGED AND LABELED, (SEE DETAIL A)

CHART

Part No.	XX	L	T	Barcode
DFMM-STLC-10M	10	32.8'(10000)	+2"/-0(+50/-0)	
DFMM-STLC-5M	5	16.4'(5000)	+2"/-0(+50/-0)	
DFMM-STLC-3M	3	9.84'(3000)	+2"/-0(+50/-0)	
DFMM-STLC-2M	2	6.56'(2000)	+2"/-0(+50/-0)	
DFMM-STLC-1M	1	3.28'(1000)	+2"/-0(+50/-0)	

B&B Electronics Manufacturing Co.

	UNIT: Inches[mm]	TITLE: xxM DUPLEX 62.5/125 MULTIMODE LC/ST RISER JUMPER CABLE WITH CLIP	
	DRAWN BY: A. MEDINA	DATE: 09/18/2008	
CHECKED BY:	DATE:	DRAWING NO. C.D. 2383	REV. A
APPROVED BY:	DATE:	REF:	
P.O. NO.:	DATE:	PART NO. DFMM-STLC-XX	