


REV.	REVISION	DATE

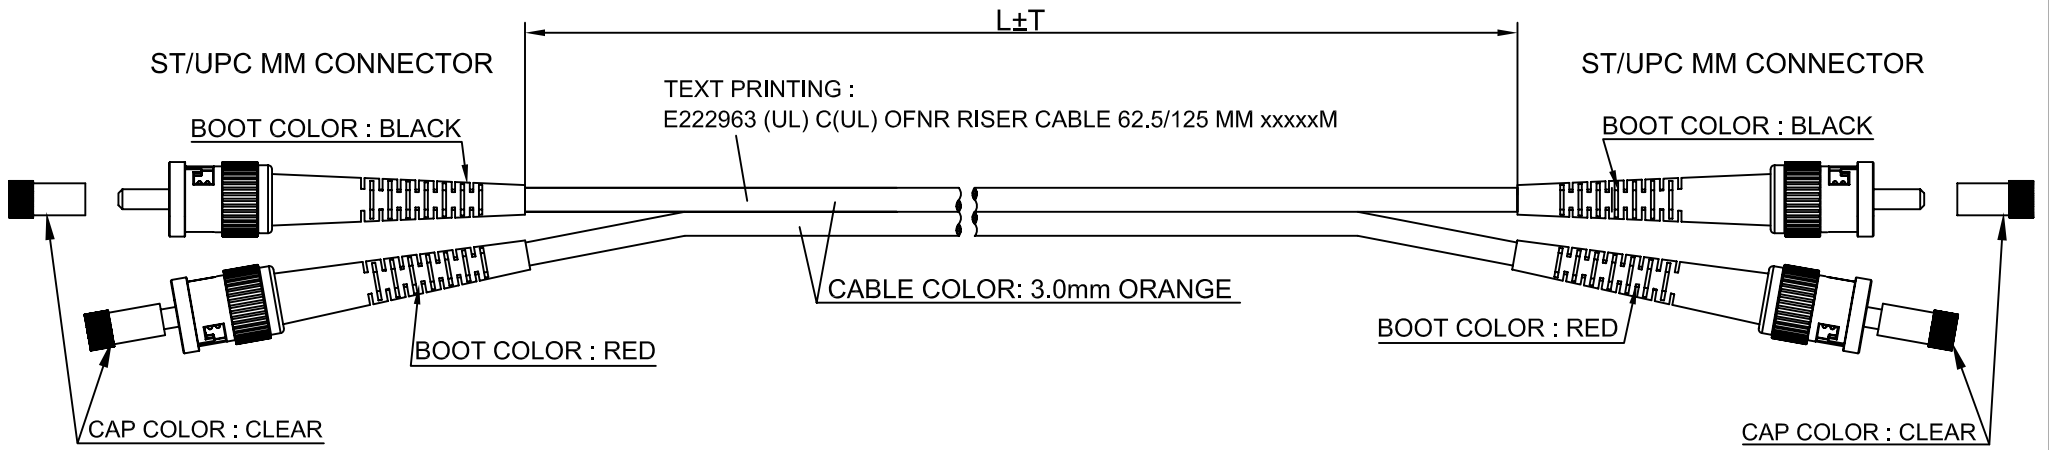

DFMM-STST-XX
 xxM ST/ST MM 62.5/125, DUPLEX RISER
 QTY. 1
www.bb-elec.com


DETAIL A

- NOTES:
1. INSERTION LOSS < 0.5dB.
 2. OPERATION TEMP: -20°C TO +60°C
 3. ORANGE PVC OUTER JACKET
 4. INDIVIDUALLY BAGGED AND LABELED, (SEE DETAIL A)

CHART

DFMM-STST-10M	10	32.8'(10000)	+2"/-0(+50/-0)	
DFMM-STST-5M	5	16.4'(5000)	+2"/-0(+50/-0)	
DFMM-STST-3M	3	9.84'(3000)	+2"/-0(+50/-0)	
DFMM-STST-2M	2	6.56'(2000)	+2"/-0(+50/-0)	
DFMM-STST-1M	1	3.28'(1000)	+2"/-0(+50/-0)	
PART NO.	XX	L	T	BARCODE

B&B Electronics manufacturing Co.

	UNIT: Inches[mm]	TITLE: xxM DUPLEX 62.5/125 MULTIMODE ST/ST RISER JUMPER CABLE	
	DRAWN BY: A. MEDINA	DATE: 05/09/2008	DRAWING NO. C.D. 2379
CHECKED BY:	DATE:	REV. A	
APPROVED BY:	DATE:	REF:	
P.O. NO.:	DATE:	PART NO. DFMM-STST-XX	