


REV.	REVISION	DATE

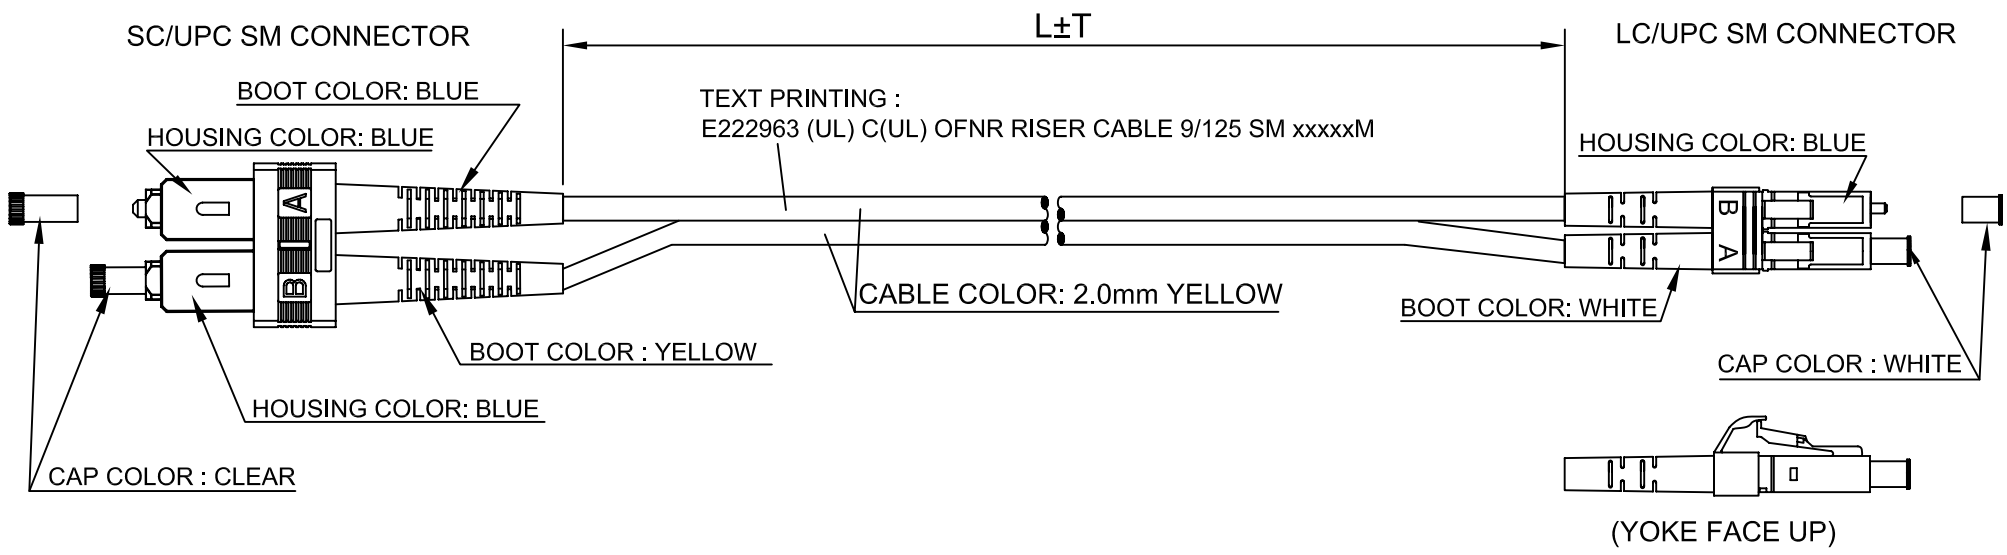

DFSM-SCLC-XX
 xxM SC/LC SM 9/125, DUPLEX RISER
 QTY. 1
www.bb-elec.com


DETAIL A

- NOTES:
1. INSERTION LOSS < 0.5dB.
 2. RETURN LOSS: CONNECTOR 1 > 55dB, CONNECTOR 2 > 55dB
 3. OPERATION TEMP: -20°C TO +60°C
 4. YELLOW PVC OUTER JACKET
 5. INDIVIDUALLY BAGGED AND LABELED, (SEE DETAIL A)

CHART

Part No.	XX	L	T	Barcode
DFSM-SCLC-10M	10	32.8'(10000)	+2"/-0(+50/-0)	
DFSM-SCLC-5M	5	16.4'(5000)	+2"/-0(+50/-0)	
DFSM-SCLC-3M	3	9.84'(3000)	+2"/-0(+50/-0)	
DFSM-SCLC-2M	2	6.56'(2000)	+2"/-0(+50/-0)	
DFSM-SCLC-1M	1	3.28'(1000)	+2"/-0(+50/-0)	

B&B Electronics Manufacturing Co.

 DRAWN BY A. MEDINA	UNIT: Inches[mm]	TITLE: xxM DUPLEX 9/125 SINGLE MODE LC/SC RISER JUMPER YELLOW CABLE WITH CLIPS	
	DATE 10/14/2008	DRAWING NO. C.D. 2390	REV. A
CHECKED BY _____	DATE _____	REF: _____	
APPROVED BY _____	DATE _____	PART NO. DFSM-SCLC-XX	
P.O. NO.: _____	DATE _____	PART NO. DFSM-SCLC-XX	