


REV.	REVISION	DATE

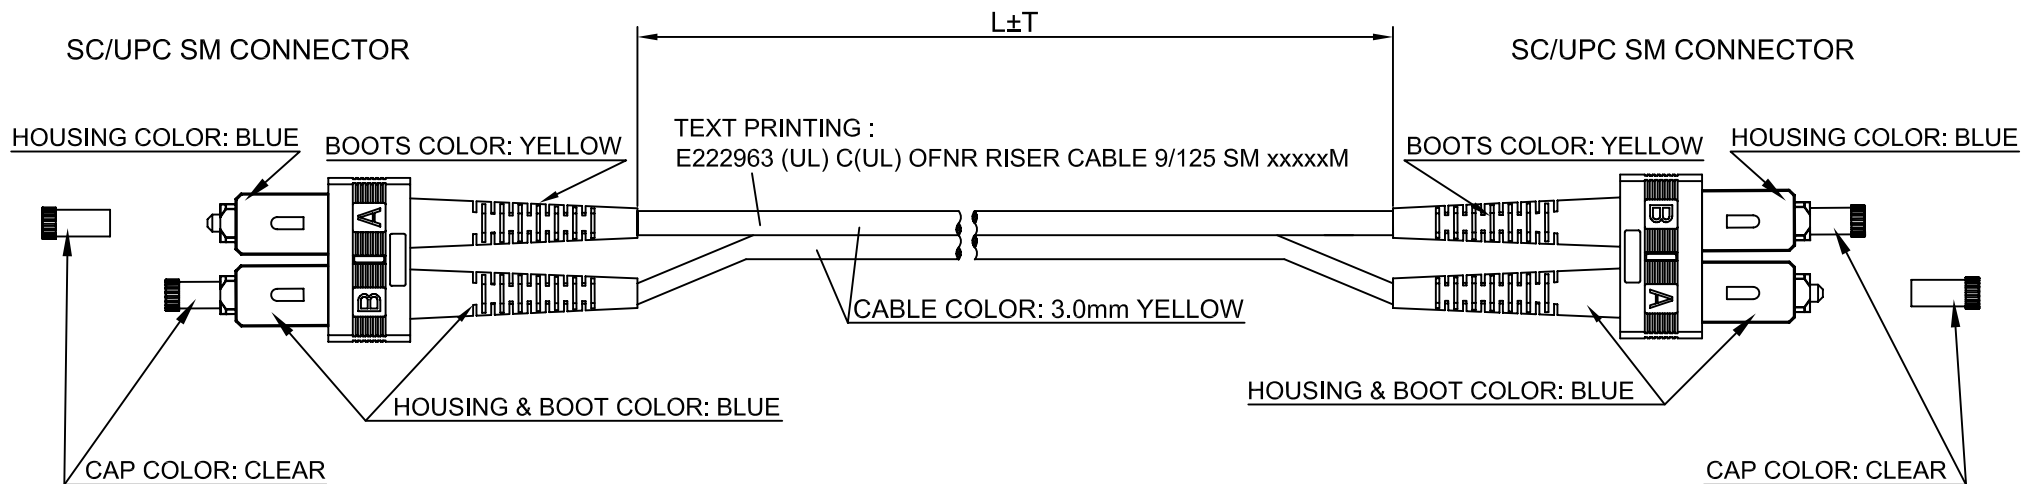

**DFSM-SCSC-XX**  
 xxM SC/SC SM 9/125, DUPLEX RISER  
 QTY. 1  
[www.bb-elec.com](http://www.bb-elec.com)

DETAIL A


**NOTES:**

1. INSERTION LOSS < 0.5dB.
2. RETURN LOSS: CONNECTOR 1 > 55dB, CONNECTOR 2 > 55dB
3. OPERATION TEMP: -20°C TO +60°C
4. YELLOW PVC OUTER JACKET
5. INDIVIDUALLY BAGGED AND LABELED, (SEE DETAIL A)

**CHART**

Part No.	XX	L	T	Barcode
DFSM-SCSC-10M	10	32.8'(10000)	+2"/-0(+50/-0)	
DFSM-SCSC-5M	5	16.4'(5000)	+2"/-0(+50/-0)	
DFSM-SCSC-3M	3	9.84'(3000)	+2"/-0(+50/-0)	
DFSM-SCSC-2M	2	6.56'(2000)	+2"/-0(+50/-0)	
DFSM-SCSC-1M	1	3.28'(1000)	+2"/-0(+50/-0)	

**B&B Electronics Manufacturing Co.**

	UNIT: <b>Inches[mm]</b>	TITLE: xxM DUPLEX 9/125 SINGLE MODE SC/SC RISER JUMPER YELLOW CABLE WITH CLIPS	
	DRAWN BY <b>A. MEDINA</b>	DATE <b>09/18/2008</b>	DRAWING NO. <b>C.D. 2386</b>
CHECKED BY	DATE	REF:	
APPROVED BY	DATE	PART NO. <b>DFSM-SCSC-XX</b>	