



Photomicrosensor (Reflective) EE-SB5(-B)

■ Dimensions

Note: All units are in millimeters unless otherwise indicated.

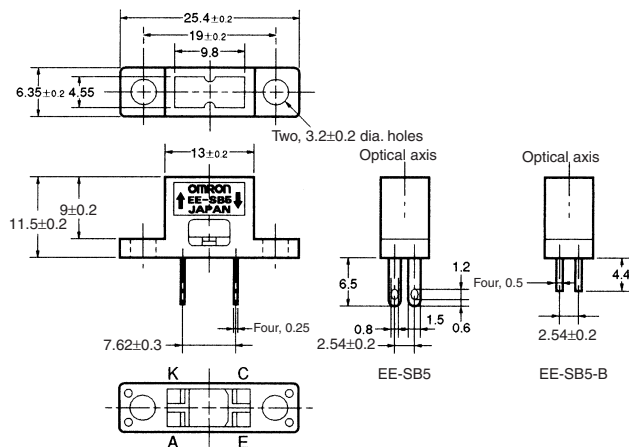

Internal Circuit



Unless otherwise specified, the tolerances are as shown below.

| Dimensions | Tolerance |
|--------------|-----------|
| 3 mm max. | ±0.3 |
| 3 < mm ≤ 6 | ±0.375 |
| 6 < mm ≤ 10 | ±0.45 |
| 10 < mm ≤ 18 | ±0.55 |
| 18 < mm ≤ 30 | ±0.65 |

| Terminal No. | Name |
|--------------|-----------|
| A | Anode |
| K | Cathode |
| C | Collector |
| E | Emitter |

■ Features

- Dust-tight construction.
- With a visible-light intercepting filter which allows objects to be sensed without being greatly influenced by the light radiated from fluorescent lamps.
- Mounted with M3 screws.
- Model with soldering terminals (EE-SB5).
- Model with PCB terminals (EE-SB5-B).
- RoHS Compliant.

■ Absolute Maximum Ratings (Ta = 25°C)

| Item | Symbol | Rated value |
|-----------------------|---------------------------|---------------------------|
| Emitter | Forward current | I_F 50 mA (see note 1) |
| | Pulse forward current | I_{FP} 1 A (see note 2) |
| | Reverse voltage | V_R 4 V |
| Detector | Collector–Emitter voltage | V_{CEO} 30 V |
| | Emitter–Collector voltage | V_{ECO} --- |
| | Collector current | I_C 20 mA |
| | Collector dissipation | P_C 100 mW (see note 1) |
| Ambient temperature | Operating | T_{opr} -25°C to 80°C |
| | Storage | T_{stg} -30°C to 80°C |
| Soldering temperature | T_{sol} | 260°C (see note 3) |

- Note: 1. Refer to the temperature rating chart if the ambient temperature exceeds 25°C.
 2. The pulse width is 10 μs maximum with a frequency of 100 Hz.
 3. Complete soldering within 10 seconds.

■ Ordering Information

| Description | Model |
|--|----------|
| Photomicrosensor (reflective) with soldering terminals | EE-SB5 |
| Photomicrosensor (reflective) with PCB terminals | EE-SB5-B |


■ Electrical and Optical Characteristics (Ta = 25°C)

| Item | Symbol | Value | Condition | |
|--------------|--------------------------------------|----------------------------------|---|-----------------|
| Emitter | Forward voltage | V_F 1.2 V typ., 1.5 V max. | $I_F = 30$ mA | |
| | Reverse current | I_R 0.01 μA typ., 10 μA max. | $V_R = 4$ V | |
| | Peak emission wavelength | λ_P 940 nm typ. | $I_F = 20$ mA | |
| Detector | Light current | I_L 200 μA min., 2,000 μA max. | $I_F = 20$ mA, $V_{CE} = 10$ V White paper with a reflection ratio of 90%, d = 5 mm (see note) | |
| | Dark current | I_D 2 nA typ., 200 nA max. | $V_{CE} = 10$ V, 0 lx | |
| | Leakage current | I_{LEAK} 2 μA max. | $I_F = 20$ mA, $V_{CE} = 10$ V with no reflection | |
| | Collector–Emitter saturated voltage | $V_{CE(sat)}$ | --- | --- |
| | Peak spectral sensitivity wavelength | λ_p | 850 nm typ. | $V_{CE} = 10$ V |
| Rising time | tr | 30 μs typ. | $V_{CC} = 5$ V, $R_L = 1$ kΩ, $I_L = 1$ mA | |
| Falling time | tf | 30 μs typ. | $V_{CC} = 5$ V, $R_L = 1$ kΩ, $I_L = 1$ mA | |


Note: The letter “d” indicates the distance between the top surface of the sensor and the sensing object.

■ Engineering Data


Forward Current vs. Collector Dissipation Temperature Rating

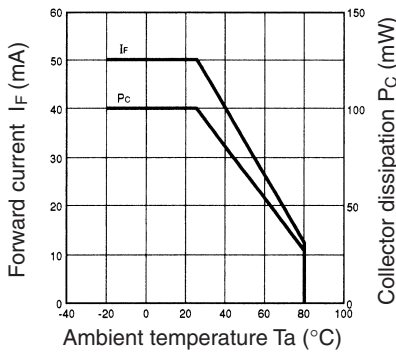


Light Current vs. Forward Current Characteristics (Typical)

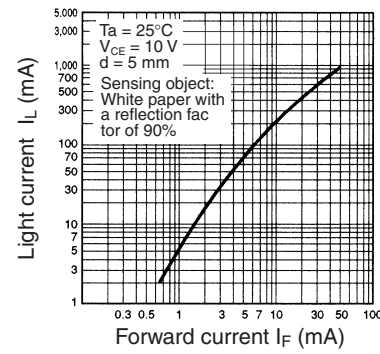


Light Current vs. Collector-Emitter Voltage Characteristics (Typical)

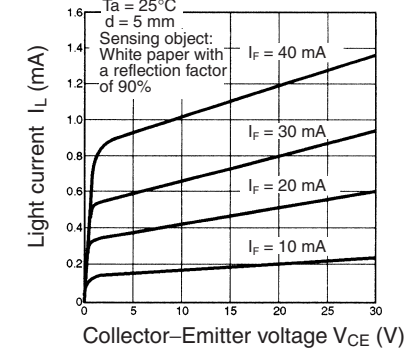


Relative Light Current vs. Ambient Temperature Characteristics (Typical)

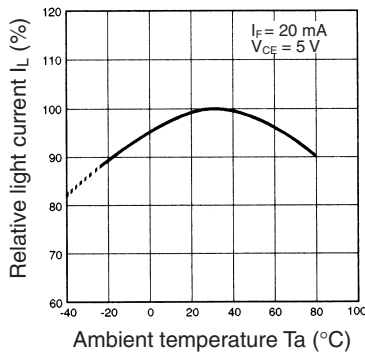


Dark Current vs. Ambient Temperature Characteristics (Typical)

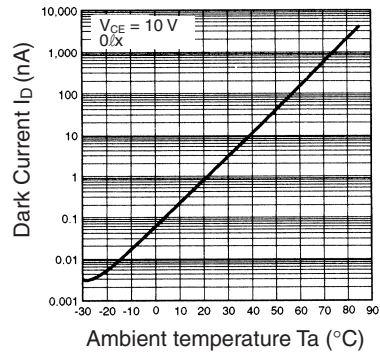


Response Time vs. Load Resistance Characteristics (Typical)

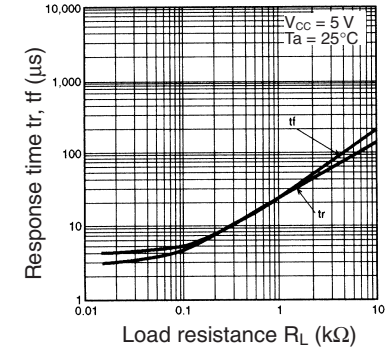


Sensing Distance Characteristics (Typical)

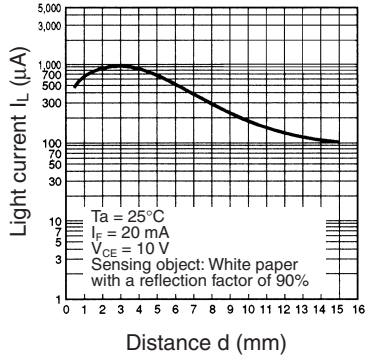


Sensing Position Characteristics (Typical)

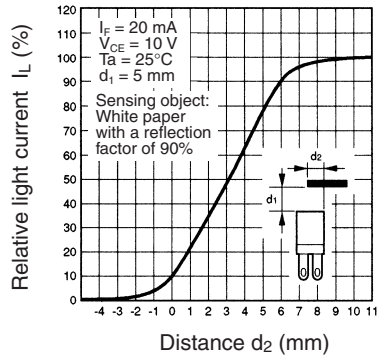


Sensing Position Characteristics (Typical)

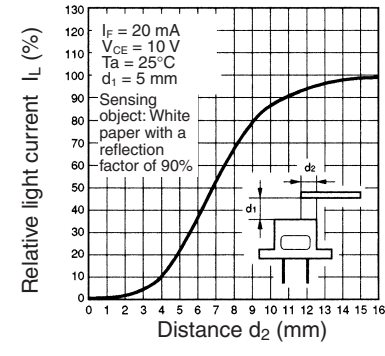

Sensing Angle Characteristics (Typical)

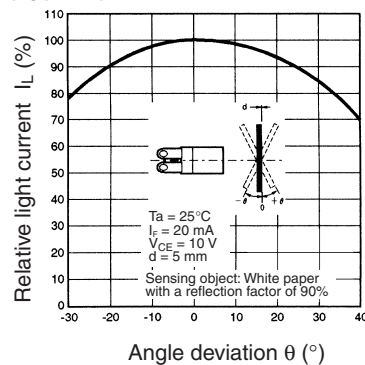

Response Time Measurement Circuit

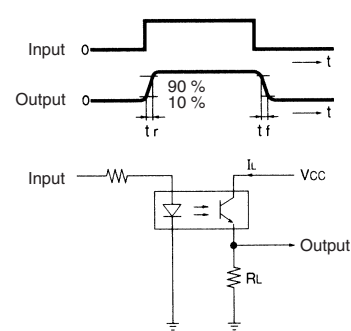

A large grid of 20 columns and 30 rows of small squares, used for taking notes or drawing. The grid is composed of thin, light gray lines forming a uniform pattern across the page.

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.



OMRON ELECTRONIC COMPONENTS LLC
55 E. Commerce Drive, Suite B
Schaumburg, IL 60173

847-882-2288

OMRON ON-LINE

Global - <http://www.omron.com>
USA - <http://www.components.omron.com>