


MOS FET Relays G3VM-61HR

Low 40-mΩ ON Resistance. High-power, 2.3-A Switching with a 60-V Load Voltage, SOP Package.

- Continuous load current of 2.3 A (connection C = 4.6 A).
- Dielectric strength of 1,500 Vrms between I/O.
- RoHS Compliant

Application Examples

- Broadband systems
- Measurement devices
- Data loggers
- Industrial equipment

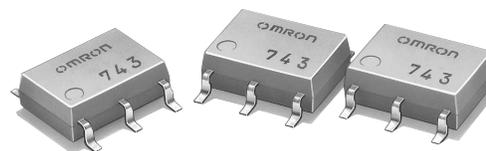

NEW

Note: The actual product is marked differently from the image shown here.

List of Models


Contact form	Terminals	Load voltage (peak value) (See note.)	Model	Number per stick	Number per tape
SPST-NO	Surface-mounting terminals	60 V	G3VM-61HR	75	---
			G3VM-61HR(TR)	---	2,500

Note: The AC peak and DC value is given for the load voltage.


Dimensions

Note: All units are in millimeters unless otherwise indicated.

G3VM-61HR




Note: The actual product is marked differently from the image shown here.

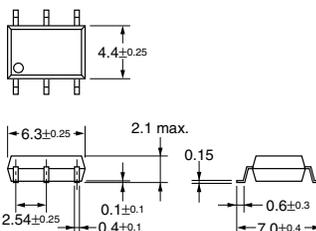

Weight: 0.13 g


Terminal Arrangement/Internal Connections (Top View)

G3VM-61HR



Actual Mounting Pad Dimensions (Recommended Value, Top View)

G3VM-61HR




■ Absolute Maximum Ratings (Ta = 25°C)

Item		Symbol	Rating	Unit	Measurement Conditions	
Input	LED forward current	I_F	30	mA		
	LED forward current reduction rate	$\Delta I_F/^\circ\text{C}$	-0.3	mA/°C	$T_a \geq 25^\circ\text{C}$	
	LED reverse voltage	V_R	5	V		
	Connection temperature	T_J	125	°C		
Output	Load voltage (AC peak/DC)	V_{OFF}	60	V		
	Continuous load current	Connection A	I_O	2.3	A	Connection A: AC peak/DC Connection B and C: DC
		Connection B		2.3		
		Connection C		4.6		
	ON current reduction rate	Connection A	$\Delta I_O/^\circ\text{C}$	-30.7	mA/°C	$T_a \geq 50^\circ\text{C}$
		Connection B		-30.7		
		Connection C		-61.3		
Pulse on current	I_{OP}	7	A	$t=100\text{ms}$		
Connection temperature	T_J	125	°C			
Dielectric strength between input and output (See note 1.)		V_{I-O}	1,500	V_{rms}	AC for 1 min	
Operating temperature		T_a	-40 to +85	°C	With no icing or condensation	
Storage temperature		T_{stg}	-55 to +125	°C	With no icing or condensation	
Soldering temperature (10 s)		---	260	°C	10 s	

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.


Connection Diagram

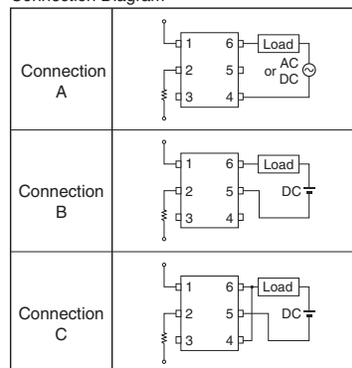

■ Electrical Characteristics (Ta = 25°C)

Item		Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions	
Input	LED forward voltage	V_F	1.18	1.33	1.48	V	$I_F = 10 \text{ mA}$	
	Reverse current	I_R	---	---	10	μA	$V_R = 5 \text{ V}$	
	Capacity between terminals	C_T	---	70	---	pF	$V = 0, f = 1 \text{ MHz}$	
	Trigger LED forward current	I_{FT}	---	0.4	3	mA	$I_O = 100 \text{ mA}$	
Output	Maximum resistance with output ON	Connection A	R_{ON}	---	0.04	0.07	Ω	$I_F = 5 \text{ mA}, I_O = 2 \text{ A}, t < 1 \text{ s}$
		Connection B		---	0.02	0.04	Ω	$I_F = 5 \text{ mA}, I_O = 2 \text{ A}, t < 1 \text{ s}$
		Connection C		---	0.01	---	Ω	$I_F = 5 \text{ mA}, I_O = 4 \text{ A}, t < 1 \text{ s}$
Current leakage when the relay is open		I_{LEAK}	---	---	10	nA	$V_{OFF} = 60 \text{ V}$	
Capacity between I/O terminals		C_{I-O}	---	0.8	---	pF	$f = 1 \text{ MHz}, V_s = 0 \text{ V}$	
Insulation resistance		R_{I-O}	1,000	---	---	M Ω	$V_{I-O} = 500 \text{ VDC}, R_{oh} \leq 60\%$	
Turn-ON time		t_{ON}	---	1.0	5.0	ms	$I_F = 5 \text{ mA}, R_L = 200 \Omega, V_{DD} = 20 \text{ V}$ (See note 2.)	
Turn-OFF time		t_{OFF}	---	0.15	1.0	ms		

Note: 2. Turn-ON and Turn-OFF Times

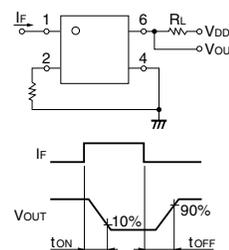


■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V_{DD}	---	---	60	V
Operating LED forward current	I_F	5	7.5	20	mA
Continuous load current (AC peak/DC)	I_O	---	---	1.8	A
Operating temperature	T_a	-20	---	65	°C

■ Engineering Data


LED forward current vs. Ambient temperature
IF - Ta

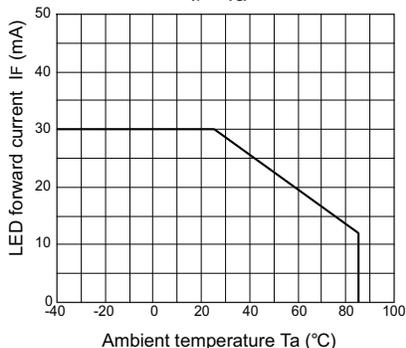


Continuous load current vs. Ambient temperature
Io - Ta

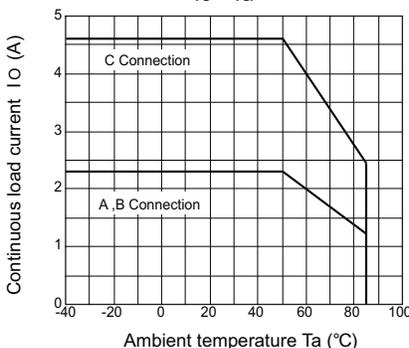


LED forward current vs. LED forward voltage
IF - VF

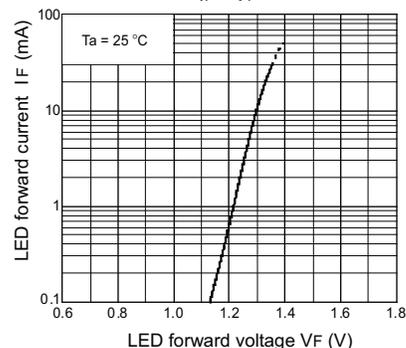


Continuous load current vs. On-state voltage
Io - VON

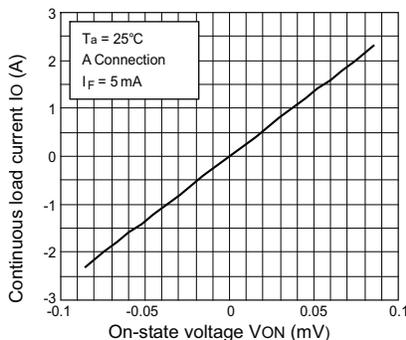


On-state resistance vs. Ambient temperature
RON - Ta

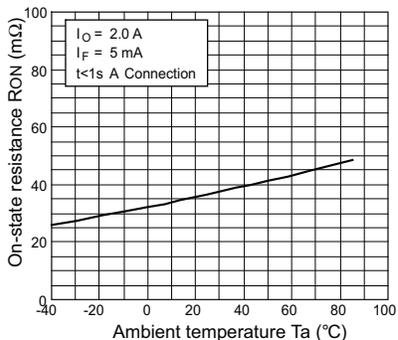


Trigger LED forward current vs. Ambient temperature
IFT - Ta

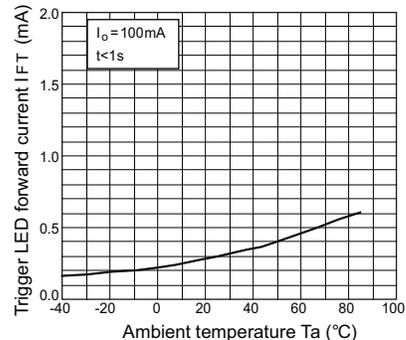


Turn ON, Turn OFF time vs. LED forward current
tON, tOFF - IF

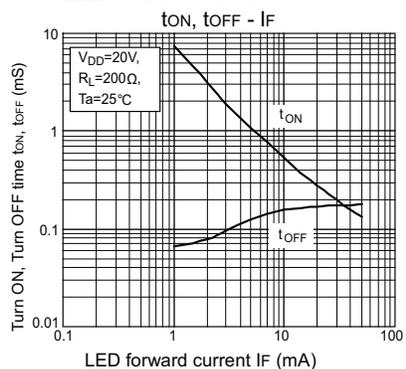


Turn ON, Turn OFF time vs. Ambient temperature
tON, tOFF - Ta

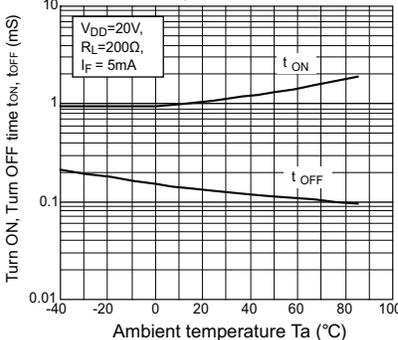

Current leakage vs. Load voltage
ILEAK - VOFF

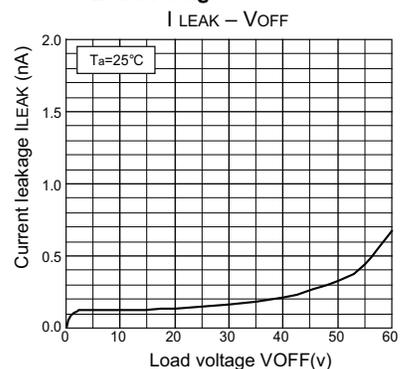

Output terminal capacitance COFF/COFF(ov) vs. Load voltage
COFF - VOFF

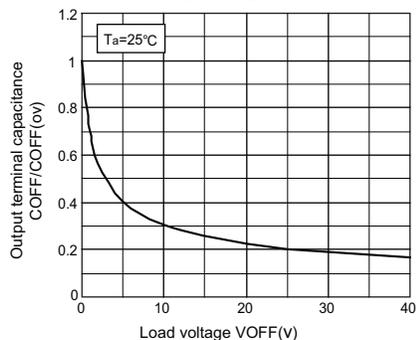

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

OMRON[®]

**OMRON ELECTRONIC
COMPONENTS LLC**

55 E. Commerce Drive, Suite B
Schaumburg, IL 60173

847-882-2288

OMRON ON-LINE

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>

Cat. No. G3VM-61HR_1

02/11

Specifications subject to change without notice

Printed in USA