
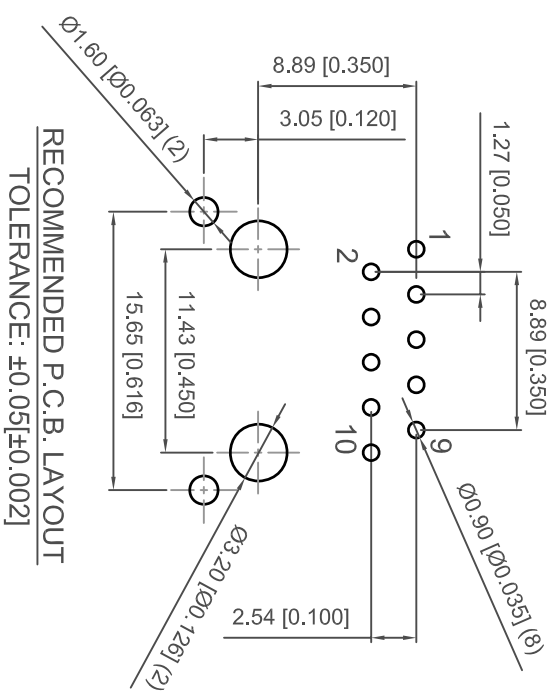
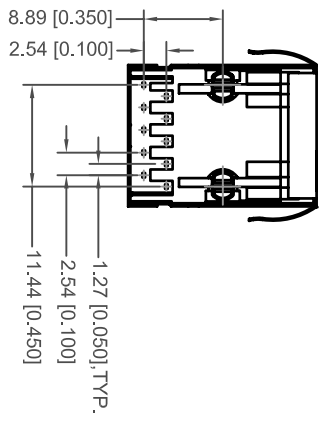
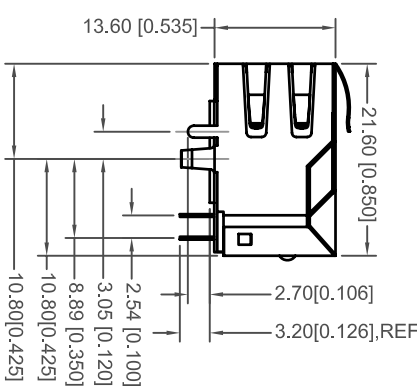

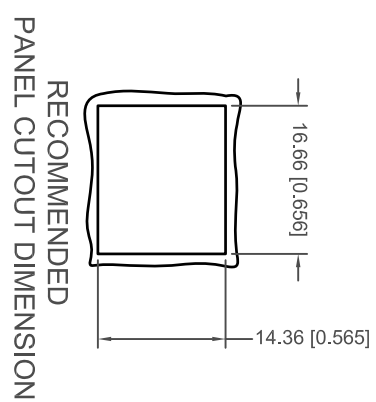


TOLERANCE UNLESS OTHERWISE SPECIFIED IN MM:
 0 ± 0.50
 0.0 ± 0.38
 0.00 ± 0.25
 0.000 ± 0.10

ANGLE 3°

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.




NOTES:
 1. MATERIALS:
 HOUSING: PBT WITH GLASS FIBER, UL94 V-0. COLOR: BLACK
 CONTACTS: 0.35MM PHOSPHOR BRONZE PLATED WITH GOLD PLATING AND TIN IN SOLDER AREA

PART NO
 A60-112-300P492 GOLD PLATING THICKNESS
 A60-113-300P492 GOLD FLASH PLATING
 A60-114-300P492 15 MICRO INCHES OF GOLD
 30 MICRO INCHES OF GOLD

SHIELD: 0.20MM COPPER ALLOY WITH NICKEL PLATING
 2. OPERATING TEMPERATURE: 0°C TO +70°C
 3. MATE WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
 4. DIMENSION: MM [INCHES]



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2002/95/EC AND 2002/96/EC FOR ROHS COMPLIANCY.



EDAC INC
 TORONTO, ONTARIO
 CANADA

YOUR CONNECTION TO QUALITY & SERVICE

**RJ45 MAGNETIC JACK WITHOUT LED, 10P, 8C
 SHIELDED/10/100/1000 Mbps FILTER**

ACAD REFERENCE NO.: A60-113-300P492

DRAWN: R.STA.MONICA DATE: JAN.24/2011

CHECKED: DATE:


PART NUMBER SEE NOTE SHEET 1 OF 2

DRAWING NUMBER A60-112-300P492 ISSUE 1

ELECTRICAL CIRCUIT:

TOLERANCE UNLESS OTHERWISE SPECIFIED IN MM:	ANGLE
0	3°
0.0	
0.00	
0.000	
± 0.10	

THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER
ORIGINAL

1

CONNECTOR SOLDER SIDE

RJ45 CONTACT SIDE

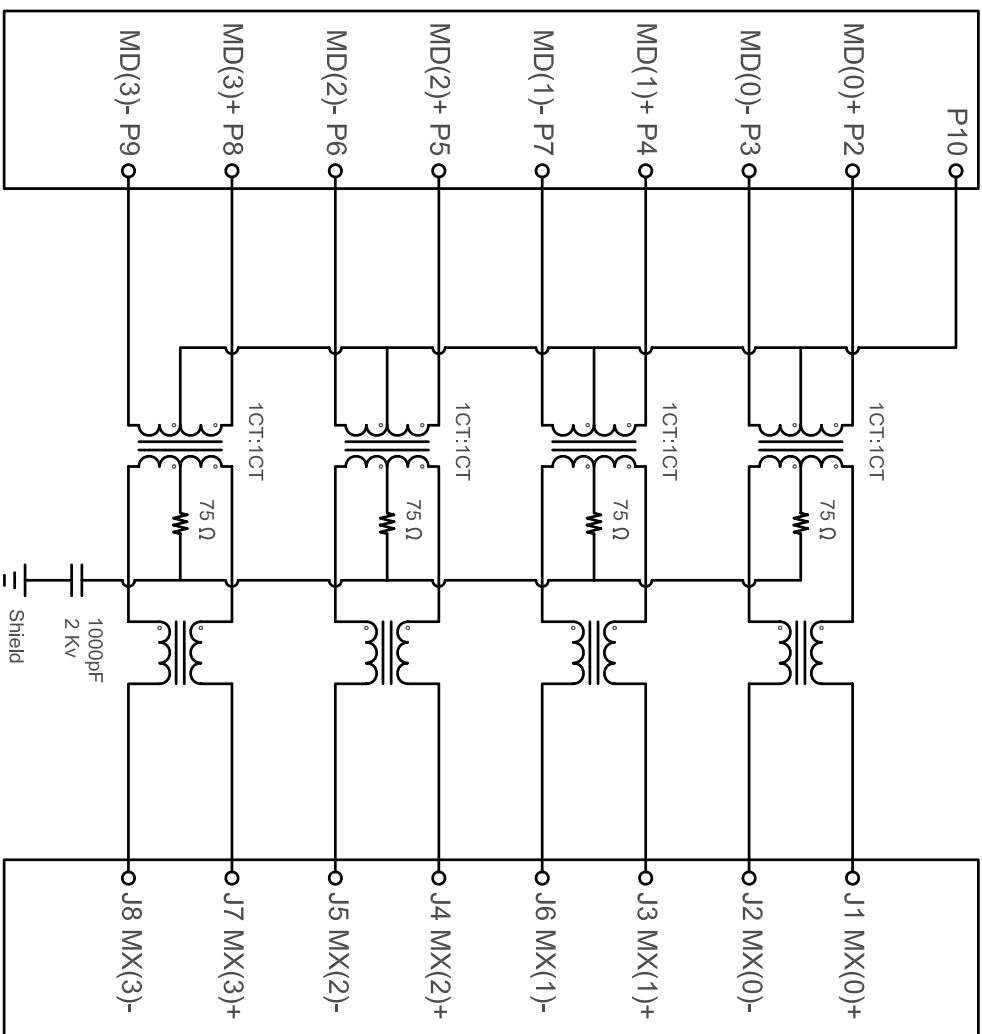

TEST NOTES:(25°±5°C)

1. TR:(100KHz,0.1V): 100%
PINS:(P2,P3)TO(J1,J2)=1:1±3%:(P4,P5):(J3,J6)=1:1±3%
PINS:(P5,P6):(J4,J5)=1:1±3%:(P8,P9):(J7,J8)=1:1±3%
2. LX:(100KHz,100mV,8mA, DC Bias) 100%
PINS:(P2,P3),(P4,P7),(P5,P6),(P8,P9)=350uH MINIMUM
3. DCR: 100%
PINS:(J1,J2),(J3,J6),(J4,J5),(J7,J8)=1.2Ω MAXIMUM
4. HIPOT: 100%
PINS:(P2,P3)TO(J1,J2),(P4,P7)TO(J3,J6)=1500VAC FOR 2 SECONDS
PINS:(P5,P6)TO(J4,J5),(P8,P9)TO(J7,J8)=1500VAC FOR 2 SECONDS
5. INSERTION LOSS:
-1.0dB MAXIMUM AT 1 MHz TO 100MHZ;
6. RETURN LOSS:
-20dB MINIMUM AT 1MHZ TO 30MHZ;
-15dB MINIMUM AT 30MHZ TO 60MHZ
-10dB MINIMUM AT 60MHZ TO 80MHZ
7. CROSS TALK:
-30dB MINIMUM AT 0.1MHZ TO 100MHZ
-30dB MINIMUM AT 0.1MHZ TO 100MHZ
8. COMMON TO COMMON MODE REJECTION:
-30dB MINIMUM AT 300KHz TO 100MHZ

RJ45 MAGNETIC JACK WITHOUT LED, 10P, 8C
SHIELDED/10/100/1000 Mbps FILTER

ACAD REFERENCE NO.: A60-113-300P492

DRAWN: R.STA.MONICA DATE: JAN.24/2011

CHECKED: DATE:

PART NUMBER

SEE NOTE

SHEET 2 OF 2

DRAWING NUMBER


A60-112-300P492

ISSUE

1



THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES 2002/95/EC
AND 2002/96/EC FOR RoHS COMPLIANCY.



EDAC INC
TORONTO, ONTARIO
CANADA

YOUR CONNECTION TO QUALITY & SERVICE