

15kW POWER TVS COMPONENT



AXIAL LEAD PACKAGE

DESCRIPTION

The P15KP Series, are discrete 15,000 Watt, silicon transient voltage suppressors (TVS) designed for use in applications where large voltage transients can permanently damage voltage sensitive components and equipment.

The P15KP series is available in voltages ranging from 17V to 280V with 5 percent and 10 percent tolerances. Both tolerances are referenced to the power supply output or operating voltage level. This series is compatible with IEC 61000-4-5 (Surge) requirements.

FEATURES

- Compatible with IEC 61000-4-5 (Surge): 48A, 8/20μs - L3(Line-Ground), L4(Line-Line) & L1 (Power)
- 15,000 Watts Peak Pulse Power per Line ($t_p = 10/1000\mu s$)
- Unidirectional and Bidirectional Configurations
- Easy Mounting to Printed Circuit Board
- tClamping (0V to V_{BR} Min.) $< 1 \times 10^{-12}$ seconds theoretical
- Available in Multiple Voltages Ranging From 17V to 280V

MECHANICAL CHARACTERISTICS

- Molded Case
- Approximate Weight: 5 grams
- Tin-Lead Plating
- Solder Reflow Temperature: 240-245°C
- Flammability Rating UL 94V-0

APPLICATIONS

- Relay Drives
- Motor (Start/Stop) Back EMF Protection
- Module Lightning Protection
- Secondary Lightning Protection for AC/DC

CIRCUIT DIAGRAMS



TYPICAL DEVICE CHARACTERISTICS

| MAXIMUM RATINGS @ 25°C Unless Otherwise Specified | | | |
|--|-----------|------------|-------|
| PARAMETER | SYMBOL | VALUE | UNITS |
| Peak Pulse Power ($t_p = 10/1000\mu s$) - See Figure 1 | P_{pp} | 15,000 | Watts |
| Forward Surge Rating - 1/120 seconds - See Note 2 | I_F | 200 | Amps |
| Steady State Power Dissipation | P_p | 1.0 | Watts |
| Storage Temperature | T_{STG} | -55 to 150 | °C |
| Operating Temperature | T_L | -55 to 150 | °C |

| ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified | | | | | | |
|---|-------------------------|-------------------------|---------------|---|--|---|
| PART NUMBER (Notes 1 - 2) | RATED STAND-OFF VOLTAGE | BREAKDOWN VOLTAGE | | MAXIMUM LEAKAGE CURRENT @ V_{WM} I_D μA | MAXIMUM CLAMPING VOLTAGE (Fig. 2) @ 10/1000μS V_c @ I_{pp} | TEMPERATURE COEFFICIENT OF $V_{(BR)}$ $qV_{(BR)}$ mV/°C |
| | | MIN $V_{(BR)}$ VOLTS | @ I_T mA | | | |
| P15KP17 | 17.0 | 18.9 | 50 | 5000 | 32.3V @ 464.0A | 19 |
| P15KP17A | 17.0 | 18.9 | 50 | 5000 | 29.3V @ 512.0A | 17 |
| P15KP18 | 18.0 | 20.0 | 50 | 5000 | 34.2V @ 439.0A | 20 |
| P15KP18A | 18.0 | 20.0 | 50 | 5000 | 30.9V @ 485.0A | 18 |
| P15KP20 | 20.0 | 22.2 | 20 | 1500 | 37.9V @ 396.0A | 24 |
| P15KP20A | 20.0 | 22.2 | 20 | 1500 | 34.3V @ 437.0A | 21 |
| P15KP22 | 22.0 | 24.4 | 10 | 500 | 41.1V @ 365.0A | 27 |
| P15KP22A | 22.0 | 24.4 | 10 | 500 | 37.1V @ 404.0A | 24 |
| P15KP24 | 24.0 | 26.7 | 5 | 150 | 45.0V @ 333.0A | 30 |
| P15KP24A | 24.0 | 26.7 | 5 | 150 | 40.7V @ 369.0A | 27 |
| P15KP26 | 26.0 | 28.9 | 5 | 50 | 48.7V @ 308.0A | 32 |
| P15KP26A | 26.0 | 28.9 | 5 | 50 | 44.0V @ 341.0A | 29 |
| P15KP28 | 28.0 | 31.1 | 5 | 25 | 52.4V @ 286.0A | 35 |
| P15KP28A | 28.0 | 31.1 | 5 | 25 | 47.5V @ 316.0A | 31 |
| P15KP30 | 30.0 | 33.3 | 5 | 15 | 56.2V @ 267.0A | 27 |
| P15KP30A | 30.0 | 33.3 | 5 | 15 | 50.7V @ 296.0A | 34 |
| P15KP33 | 33.0 | 36.7 | 5 | 10 | 60.6V @ 248.0A | 42 |
| P15KP33A | 33.0 | 36.7 | 5 | 10 | 54.8V @ 274.0A | 38 |
| P15KP36 | 36.0 | 40.0 | 5 | 10 | 66.0V @ 227.0A | 46 |
| P15KP36A | 36.0 | 40.0 | 5 | 10 | 59.7V @ 251.0A | 41 |
| P15KP40 | 40.0 | 44.4 | 5 | 10 | 72.8V @ 206.0A | 51 |
| P15KP40A | 40.0 | 44.4 | 5 | 10 | 65.8V @ 228.0A | 46 |
| P15KP43 | 43.0 | 47.8 | 5 | 10 | 77.1V @ 195.0A | 55 |
| P15KP43A | 43.0 | 47.8 | 5 | 10 | 69.7V @ 215.0A | 50 |
| P15KP45 | 45.0 | 50.0 | 5 | 10 | 80.7V @ 186.0A | 57 |
| P15KP45A | 45.0 | 50.0 | 5 | 10 | 73.0V @ 205.0A | 52 |

TYPICAL DEVICE CHARACTERISTICS

| ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified | | | | | | |
|---|-------------------------|-------------------------|---------------|--|---|--|
| PART NUMBER (Notes 1 - 2) | RATED STAND-OFF VOLTAGE | BREAKDOWN VOLTAGE | | MAXIMUM LEAKAGE CURRENT @ V_{WM} I_D μA | MAXIMUM CLAMPING VOLTAGE (Fig. 2) @ 10/1000μS V_c @ I_{PP} | TEMPERATURE COEFFICIENT OF $V_{(BR)}$ q $V_{(BR)}$ mV/°C |
| | | MIN $V_{(BR)}$ VOLTS | @ I_T mA | | | |
| P15KP48 | 48.0 | 53.3 | 5 | 10 | 85.9V @ 175.0A | 62 |
| P15KP48A | 48.0 | 53.3 | 5 | 10 | 77.7V @ 193.0A | 56 |
| P15KP51 | 51.0 | 56.7 | 5 | 10 | 91.5V @ 164.0A | 66 |
| P15KP51A | 51.0 | 56.7 | 5 | 10 | 82.8V @ 181.0A | 60 |
| P15KP54 | 54.0 | 60.0 | 5 | 10 | 96.8V @ 155.0A | 70 |
| P15KP54A | 54.0 | 60.0 | 5 | 10 | 87.5V @ 171.0A | 63 |
| P15KP58 | 58.0 | 64.4 | 5 | 10 | 104.0V @ 144.0A | 76 |
| P15KP58A | 58.0 | 64.4 | 5 | 10 | 94.0V @ 160.0A | 68 |
| P15KP60 | 60.0 | 66.7 | 5 | 10 | 107.0V @ 140.0A | 78 |
| P15KP60A | 60.0 | 66.7 | 5 | 10 | 97.3V @ 154.0A | 71 |
| P15KP64 | 64.0 | 71.1 | 5 | 10 | 115.0V @ 130.0A | 84 |
| P15KP64A | 64.0 | 71.1 | 5 | 10 | 104.0V @ 144.0A | 76 |
| P15KP70 | 70.0 | 77.8 | 5 | 10 | 126.0V @ 119.0A | 92 |
| P15KP70A | 70.0 | 77.8 | 5 | 10 | 114.0V @ 132.0A | 83 |
| P15KP75 | 75.0 | 83.3 | 5 | 10 | 135.0V @ 111.0A | 100 |
| P15KP75A | 75.0 | 83.3 | 5 | 10 | 122.0V @ 123.0A | 89 |
| P15KP78 | 78.0 | 86.7 | 5 | 10 | 140.0V @ 107.0A | 104 |
| P15KP78A | 78.0 | 86.7 | 5 | 10 | 126.0V @ 119.0A | 93 |
| P15KP85 | 85.0 | 94.4 | 5 | 10 | 152.0V @ 99.0A | 113 |
| P15KP85A | 85.0 | 94.4 | 5 | 10 | 137.0V @ 109.0A | 102 |
| P15KP90 | 90.0 | 100.0 | 5 | 10 | 160.0V @ 94.0A | 120 |
| P15KP90A | 90.0 | 100.0 | 5 | 10 | 146.0V @ 103.0A | 109 |
| P15KP100 | 100.0 | 111.0 | 5 | 10 | 179.0V @ 84.0A | 134 |
| P15KP100A | 100.0 | 111.0 | 5 | 10 | 162.0V @ 93.0A | 121 |
| P15KP110 | 110.0 | 122.0 | 5 | 10 | 196.0V @ 77.0A | 147 |
| P15KP110A | 110.0 | 122.0 | 5 | 10 | 178.0V @ 84.0A | 133 |
| P15KP120 | 120.0 | 133.0 | 5 | 10 | 214.0V @ 70.0A | 161 |
| P15KP120A | 120.0 | 133.0 | 5 | 10 | 193.0V @ 78.0A | 145 |
| P15KP130 | 130.0 | 144.0 | 5 | 10 | 231.0V @ 65.0A | 174 |
| P15KP130A | 130.0 | 144.0 | 5 | 10 | 209.0V @ 72.0A | 157 |
| P15KP150 | 150.0 | 167.0 | 5 | 10 | 268.0V @ 56.0A | 202 |
| P15KP150A | 150.0 | 167.0 | 5 | 10 | 243.0V @ 62.0A | 183 |
| P15KP160 | 160.0 | 178.0 | 5 | 10 | 287.0V @ 52.0A | 216 |
| P15KP160A | 160.0 | 178.0 | 5 | 10 | 259.0V @ 58.0A | 195 |

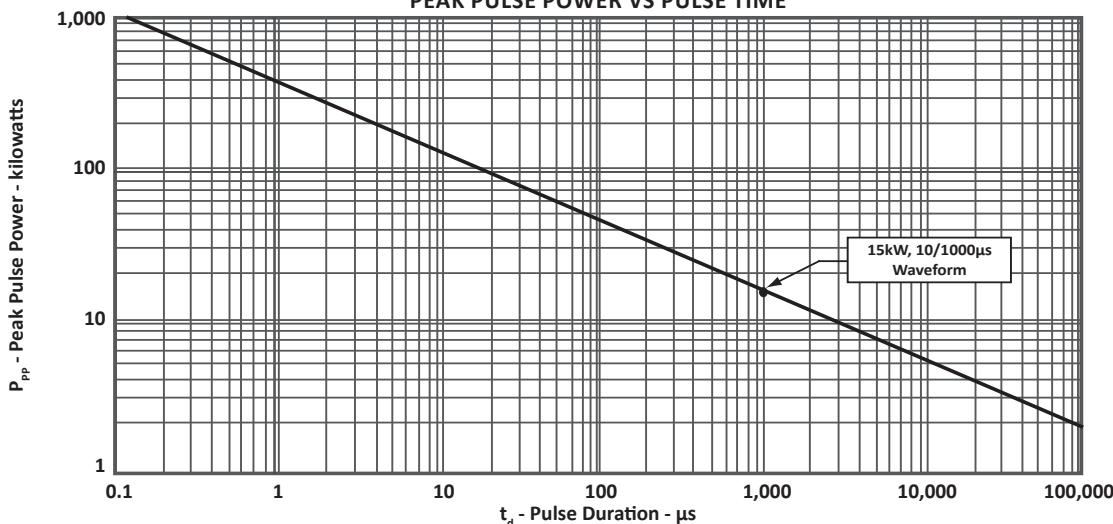
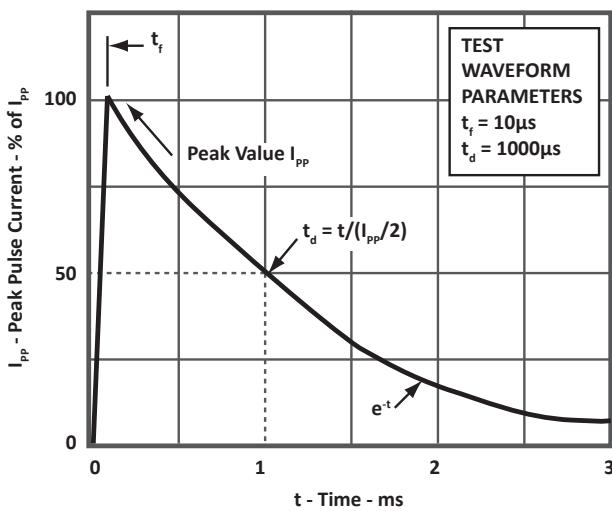
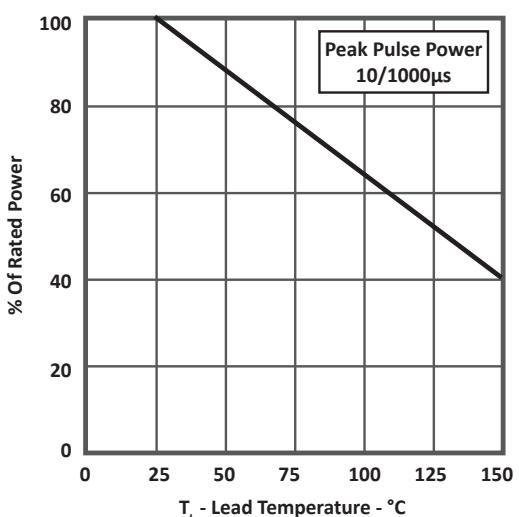
TYPICAL DEVICE CHARACTERISTICS

| ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified | | | | | | |
|---|--|-------------------------|---------------|--|--|---|
| PART NUMBER (Notes 1 - 2) | RATED STAND-OFF VOLTAGE V_{WM} VOLTS | BREAKDOWN VOLTAGE | | MAXIMUM LEAKAGE CURRENT @ V_{WM} I_D μA | MAXIMUM CLAMPING VOLTAGE (Fig. 2) @ 10/1000μS V_c @ I_{PP} | TEMPERATURE COEFFICIENT OF $V_{(BR)}$ $qV_{(BR)}$ mV/°C |
| | | MIN $V_{(BR)}$ VOLTS | @ I_T mA | | | |
| P15KP170 | 170.0 | 189.0 | 5 | 10 | 304.0V @ 49.0A | 229 |
| P15KP170A | 170.0 | 189.0 | 5 | 10 | 275.0V @ 55.0A | 207 |
| P15KP180 | 180.0 | 200.0 | 5 | 10 | 321.0V @ 47.0A | 242 |
| P15KP180A | 180.0 | 200.0 | 5 | 10 | 291.0V @ 52.0A | 219 |
| P15KP200 | 200.0 | 222.0 | 5 | 10 | 356.0V @ 42.0A | 269 |
| P15KP200A | 200.0 | 222.0 | 5 | 10 | 322.0V @ 47.0A | 243 |
| P15KP220 | 220.0 | 245.0 | 5 | 10 | 393.0V @ 38.0A | 297 |
| P15KP220A | 220.0 | 245.0 | 5 | 10 | 356.0V @ 42.0A | 269 |
| P15KP240 | 240.0 | 267.0 | 5 | 10 | 428.0V @ 35.0A | 324 |
| P15KP240A | 240.0 | 267.0 | 5 | 10 | 388.0V @ 39.0A | 293 |
| P15KP260 | 260.0 | 289.0 | 5 | 10 | 464.0V @ 32.0A | 352 |
| P15KP260A | 260.0 | 289.0 | 5 | 10 | 419.0V @ 36.0A | 317 |
| P15KP280 | 280.0 | 311.0 | 5 | 10 | 500.0V @ 30.0A | 378 |
| P15KP280A | 280.0 | 311.0 | 5 | 10 | 452.0V @ 33.0A | 342 |

NOTES

- Part numbers shown are unidirectional devices. Add a "CA" suffix to specify bidirectional devices, such as P15KP20CA.
- V_F = 7.5 Volts @ 200A, 8.3ms(1/2 Sine Wave) - Unidirectional devices only.

TYPICAL DEVICE CHARACTERISTICS

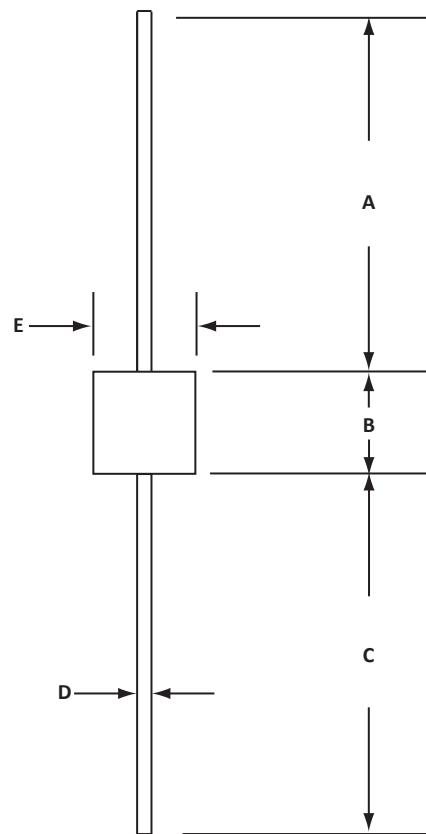
FIGURE 1
 PEAK PULSE POWER VS PULSE TIME

FIGURE 2
 PULSE WAVEFORM

FIGURE 3
 POWER DERATING CURVE


AXIAL LEAD(MOD) PACKAGE INFORMATION

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|-----------|------------|------------|
| | MIN | MAX | MIN | MAX |
| A | 25.4 | - | 1.00 | - |
| B | 9.27 | 9.77 | 0.365 | 0.385 |
| C | 25.4 | - | 1.00 | - |
| D | 1.20 DIA. | 1.30 DIA. | 0.048 DIA. | 0.052 DIA. |
| E | 5.96 | 6.47 | 0.235 | 0.255 |

NOTES

1. Dimensions are exclusive of mold flash and metal burrs.



| ORDERING INFORMATION | | | | | |
|------------------------------------|-----------------|-------------|----------|-----------|----------|
| BASE PART NUMBER (xx = Voltage) | LEADFREE SUFFIX | TAPE SUFFIX | QTY/REEL | REEL SIZE | TUBE QTY |
| P15KPxx | n/a | n/a | n/a | n/a | n/a |
| P15KPxxA | n/a | n/a | n/a | n/a | n/a |
| P15KPxxCA | n/a | n/a | n/a | n/a | n/a |

NOTES

1. Marking on Part - logo, part number, date code and positive terminal marked with band(unidirectional only).

MARKING DIAGRAM

COMPANY INFORMATION

COMPANY PROFILE

In business more than 20 years, ProTek Devices™ is a privately-held company located in Tempe, Arizona, that offers a product line of transient voltage suppressors (TVS); avalanche breakdown diodes; steering diode TVS arrays and other surge suppressor component products. These TVS devices protect electronic systems from the effects of lightning, electrostatic discharge (ESD), nuclear electromagnetic pulses (NEMP), inductive switching and EMI / RFI. ProTek Devices also offers high performance interface and linear products that include analog switches; multiplexers; LED drivers; audio control ICs; RF and related high frequency products. The analog devices work in a host of consumer; industrial; automotive and other applications.

CONTACT US

Corporate Headquarters

2929 South Fair Lane
Tempe, Arizona 85282
USA

By Telephone

General: 602-431-8101
Sales: & Marketing: 602-414-5109
Customer Service: 602-414-5114
Product Technical Support: 602-414-5107

By Fax

General: 602-431-2288

By E-mail:

Sales: sales@protekdevices.com
Customer Service: service@protekdevices.com
Technical Support: support@protekdevices.com

ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19
Zervex
Singapore - 408538
Tel: +65-67488312
Fax: +65-67488313

Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 2009 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.