

All-rounder

**PULS**

# SL20.303

- Input: 3 AC 400V
- Output: 48...56V / 480W (600W)
- 92% efficiency
- Ideal for parallel operation
- Simple fusing



CE  
EMC and  
Low Volt.  
Directive

C<sup>UL</sup> US  
UL60950 E137006  
CUL/CSA-C22.2  
No. 60950

C<sup>UL</sup> US

UL508 LISTED  
IND. CONT. EQ.  
18 W/M, 60°C

CB  
scheme  
IEC60950

Data sheet

## Input

Input voltage	3 AC 400 V, - 15 %, + 20 % 47-63 Hz, suitable for IT power systems	
Rated tolerances	<ul style="list-style-type: none"> <li>• Continuous operation 340-479 V AC or 450-700 V DC</li> <li>• Short-term (1 min) at 48 V/10 A 300-550 V AC or 370-790 V DC</li> </ul>	
Input current	3 x 1.5 A	
Inrush current	< 15 A at 440 V AC	
Inrush current limiting done with a fixed 47R resistor (not a thermistor) which is bridged after the unit is running, so losses are minimised. That means no reset time even at a warm-start.		
Fuse loading	< 2 A <sup>2</sup> s	
To be fused with a 3 x 10A, B-type 'circuit-breaker' switch based on the usual thermomagnetic overload sensing principle (used anyway to fuse the input lines; unit has no internal fuses).		
Harmonic current emissions (PFC)	acc. to EN 61000-3-2	
Transient handling	Active transient filter incorporated, so transient resistance acc. to VDE 0160 / W2 (1300 V / 1.3 ms), for all load conditions.	
Hold-up time	> 11 ms at 48 V/10 A, 400 V AC	

## Efficiency, Reliability etc.\*

Efficiency	typ. 92 % (48 V/10 A, 400 V AC)	
Losses	typ. 42 W (48 V/10 A, 400 V AC)	
MTBF	310.000 h acc. to Siemensnorm SN 29500 (48 V/10 A, 400 V AC, T <sub>amb</sub> = +40 °C)	
Life cycle (electrolytics)	The unit exclusively uses longlife electrolytics, specified for +105°C (cf. 'The SilverLine', p.2). High reliability and lifetime, as <ul style="list-style-type: none"> <li>• only four aluminum electrolytics and</li> <li>• no small aluminum electrolytics are used.</li> </ul>	

\* For further information see data sheets „The SilverLine“, „SilverLine Family Branches“ and mechanics data sheet

## Output

Output voltage	48...56 V DC, adjustable by (covered) front panel potentiometer, preset: 48.1V ±0.5% Adjusting range guaranteed
Output noise suppression	Radiated EMI values below EN50081-1, even when using long, unscreened output cables.
Ambient temperature range T <sub>amb</sub>	Operation: 0°C...+70°C (>60°C: Derating) Storage: -25°C...+85°C
Rated continuous loading with convection cooling	<ul style="list-style-type: none"> <li>• T<sub>amb</sub>=0°C - 60°C 48 V / 10 A (480 W) resp. 56 V / 9 A (504 W)</li> <li>• T<sub>amb</sub>=0°C - 45°C 48 V / 12.5 A (600 W) resp. 56 V / 11 A (616 W) short-term (&lt; 1 min.) also at 60°C permissible</li> </ul>
Derating	typ. 12 W/K (at T <sub>amb</sub> =+60°C...+70°C)
Voltage regulation	better than 2 % over all
Ripple	< 50 mV <sub>pp</sub> (i.e. < 0.1 %) incl. spikes 20 MHz bandwidth, 50 Ω measurement
Over-voltage protect.	At 61V ± 7%: switch to hiccup mode
Front panel indicators:	<ul style="list-style-type: none"> <li>• Green LED on, when V<sub>out</sub> &gt; U<sub>T</sub>, where U<sub>T</sub> is appr. 4 V below V<sub>out</sub> adjusted (48 V...56 V).</li> <li>• Red LED on, when appr. 28 V &lt; V<sub>out</sub> &lt; U<sub>T</sub>.</li> <li>• Red LED flashes, when 0 V &lt; V<sub>out</sub> &lt; appr. 28 V.</li> </ul>
Parallel operation	Yes, up to ten SL20 units
To achieve current sharing the output V/I characteristic can be altered to be 'softer' (48.8 V at 0.1 A, 48 V at 10 A). This is done by repositioning a bridge connection (without opening the unit).	
Power Back Immunity	< 63 V

## Construction / Mechanics\*

Housing dimensions and Weight	
• W x H x D	220 mm x 124 mm x 102 mm (+ DIN rail)
• Free space for ventilation	above/below 70 mm recommended right/left 25 mm recommended
• Weight	1.8 kg
Design advantages:	<ul style="list-style-type: none"> <li>• All connection blocks are easy to reach as mounted at the front panel.</li> <li>• PVC insulated cable can be used for all connections, as the connection blocks are mounted in the cooler area on the underside of the unit.</li> </ul>

## Order information

Order number	Description
SL20.303	
SLZ02	Screw mounting set, two needed per unit

**Start / Overload Behaviour**

Startup delay	typ. 0.2 s
Rise time	appr. 20-80 ms, depending on load
Duration of switch-on attempts at	
• Initial application on mains	appr. 1.4 s
• Subsequent attempts	appr. 0.5 s
Hiccup operation at	$V_{out} < \text{appr. } 28 \text{ V}$
Duration between switch-on attempts	appr. 4 s

Electronic current limiting, protects against overload and short circuit:

- $V_{out} < \text{appr. } 28 \text{ V}$ : Periodical switch-on attempts (hiccup mode).
- $V_{out} > \text{appr. } 28 \text{ V}$ : The output current is continuous. The V/I characteristic of the supply is straight.

Advantages of the switch-on/overload behaviour:

- Safer switch-on into highly non-linear loads with large starting currents.
- Short-term overloads result in current limiting and not in an immediate shut-down.
- Parallel operation of several units possible. Proper switch-on performance is obtained.

**Further information**

For further information, especially about


- EMC
- Connections
- Safety, Approvals
- Mechanics und Mounting,

see page 2 of the „The SilverLine“ data sheet.


**For detailed dimensions**

see SilverLine mechanics data sheet SL20


**Output V/I characteristic (typ.)**

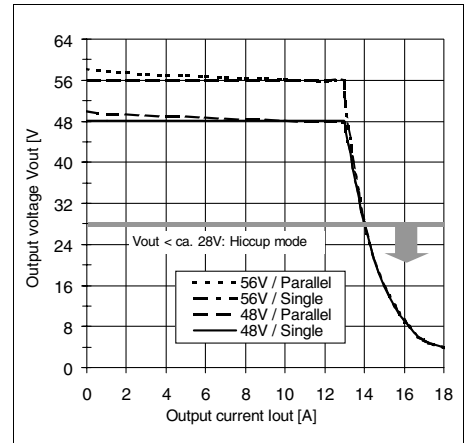

**Efficiency (typ., at  $V_{out}=48\text{V}$ )**

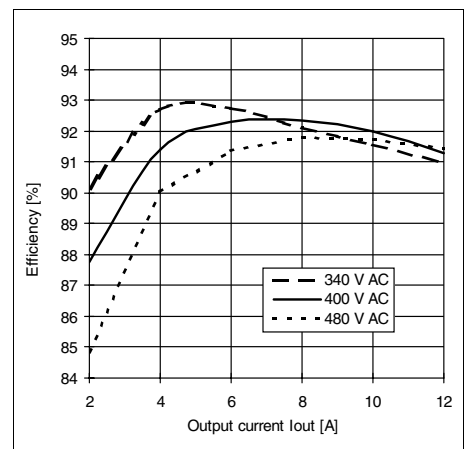

**Hold-up time (min., at  $V_{out}=48\text{V}$ )**

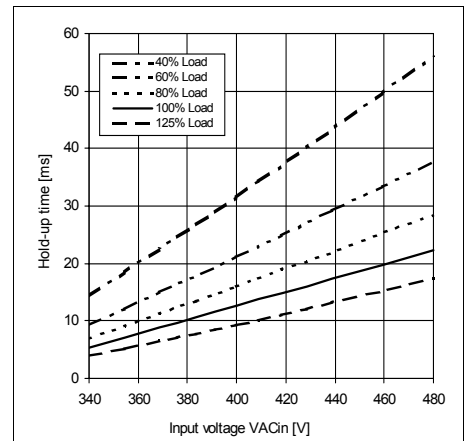

Specifications valid for 3 x AC 400V input voltage, +25°C ambient temperature, and 5 min run-in time, unless otherwise stated. They are subject to change without prior notice.

**Your partner in power supply:**



European Power Supply Manufacturers Association



Bayerns Best 50  
Czech 100 Best  
Europe's 500

**PULS GmbH**

Arabellastraße 15  
D-81925 München  
Tel.: +49 89 9278-0  
Fax: +49 89 9278-199  
www.puls-power.com