

24...28 V adjustable

SL5.102

- Input: AC 230V / 115V
- Output: 24V...28 V / 120 W
- Power boost up to 144 W
- High overload current, no switch-off
- Quasi-Wide-Range Input
- Robust mechanics and EMC



CE
EMC and
Low Volt.
Directive

UL US
UL60950 E13700
CUL/CSA-C22.2
No. 60950

UL US
UL508 LISTED
IND. CONT. EQ.
18 WM, 60°C

CB
scheme
IEC60950

Input

Input voltage	AC100-120/220-240 V (switchable), 47-63 Hz (85-132 VAC / 176-264 VAC, 210-375 VDC, see also „Output: Continuous Loading“)
Quasi-Wide-Range Input:	With the switch in the 230V position the power-supply unit operates at low and moderate loads (until 3 A) at any input voltage between 95 and 264 V AC (see ‘Output’ below).
Note:	At DC input, always leave the switch in the 230V position
Input current	< 2.6 A (switch in 115V position) < 1.4 A (switch in 230V position)
DCin at open output	typ. 5 mA (preserves battery sources)
Inrush current	typ. 15 A at 264 V AC and cold start
EN 61000-3-2 (harmonic current emissions)	is fulfilled
To be fused with a 10A, B-type ‘circuit-breaker’ switch based on the usual thermomagn. overload sensing principle (used anyway to fuse the input lines). In addition, the unit contains an internal fuse (not accessible)	
Harmonic current emissions	acc. to EN 61000-3-2
Transient handling	Transient resistance acc. to VDE 0160 / W2 (750 V / 1.3 ms), for all load conditions.
Hold up time	> 37 ms at 196 VAC, 24 V / 5 A

Efficiency, Reliability etc.*

Efficiency	typ. 90 %	(230 VAC, 24 V / 5 A)
Losses	typ. 13,3 W	(230 VAC, 24 V / 5 A)
MTBF	520,000 h acc. to Siemensnorm SN 29500 (24 V/5 A, 230 VAC, T _{amb} = +40 °C)	
Life cycle (electrolytics)	The unit exclusively uses longlife electrolytics, specified for +105°C (cf. ‘The SilverLine’, p.2).	

* For further information see data sheets „The SilverLine“, „SilverLine Family Branches“ and mechanics data sheet

Output

Output voltage	DC24 V...28 V, adjustable by (covered) front panel potentiometer; preset: 24.4 V ± 0.5 % Adjust. range guaranteed																												
Note:	also avail. with fixed 24V output: SL5.100.																												
Output noise suppression	Radiated EMI values below EN 61000-6-3, even when using long, unscreened output cables.																												
Ambient temperature range Tamb	Operation: -10°C...+70°C (>60°C: Derating) Storage: -25°C...+85°C																												
Continuous loading (at T _{amb} = -10°C...+60°C, convection cooling), see also diagram overleaf. For start at T _{amb} < 0°C and low input voltage, please contact PULS.	<table border="1"> <thead> <tr> <th>Switch</th> <th>AC/DCin</th> <th>I_{out} @ 24V</th> <th>I_{out} @ 28V</th> </tr> </thead> <tbody> <tr> <td>230V</td> <td>176-264 V ~</td> <td>5 A (6 A*)</td> <td>4,3 A (5,1 A*)</td> </tr> <tr> <td></td> <td>95-176 V ~</td> <td>3 A</td> <td>2,6 A</td> </tr> <tr> <td></td> <td>210-375 V =</td> <td>5 A (6 A*)</td> <td>4,3 A (5,1 A*)</td> </tr> <tr> <td></td> <td>150-210 V =</td> <td>3 A</td> <td>2,6 A</td> </tr> <tr> <td></td> <td>100-150 V =</td> <td>2 A</td> <td>1,7 A</td> </tr> <tr> <td>115V</td> <td>85-132 V ~</td> <td>5 A (6 A*)</td> <td>4,3 A (5,1 A*)</td> </tr> </tbody> </table> <p>Output is protected against short circuit, open circuit * short-term (< 1 min), at 45°C or forced cooling even continuous</p>	Switch	AC/DCin	I _{out} @ 24V	I _{out} @ 28V	230V	176-264 V ~	5 A (6 A*)	4,3 A (5,1 A*)		95-176 V ~	3 A	2,6 A		210-375 V =	5 A (6 A*)	4,3 A (5,1 A*)		150-210 V =	3 A	2,6 A		100-150 V =	2 A	1,7 A	115V	85-132 V ~	5 A (6 A*)	4,3 A (5,1 A*)
Switch	AC/DCin	I _{out} @ 24V	I _{out} @ 28V																										
230V	176-264 V ~	5 A (6 A*)	4,3 A (5,1 A*)																										
	95-176 V ~	3 A	2,6 A																										
	210-375 V =	5 A (6 A*)	4,3 A (5,1 A*)																										
	150-210 V =	3 A	2,6 A																										
	100-150 V =	2 A	1,7 A																										
115V	85-132 V ~	5 A (6 A*)	4,3 A (5,1 A*)																										
Derating	typ. 3 W/K (at T _{amb} = +60°C...+70°C)																												
Voltage regulation	better than 2% V _{out} overall																												
Ripple / Noise	< 25 mV _{pp} , (20 MHz bandw., 50 Ω measurem.)																												
Overvolt. protection	typ. 33 V																												
Parallel operation	yes; current sharing available on request																												
Power back immunity	34 V																												
Front panel indicator	Green LED, goes out at V _{out} < 12V																												

Construction / Mechanics*

Housing dimensions and Weight

- W x H x D 64 mm x 124 mm x 102 mm (+ DIN rail)
- Free space for above/below 25 mm recommended
- Ventilation left/right 15 mm recommended
- Weight 620 g

Design advantages:

- All connection blocks are easy to reach as mounted at the front panel.
- Input and output are strictly apart from each other and so cannot be mixed up (Input below, output above).

Order information

Order number	Description
SL5.102	
SLZ01	Screw mounting set, two needed per unit

Start / Overload Behaviour

Startup delay	typ. 0.1 s
Rise time	ca. 5-20 ms, depending on load
Overload Behaviour	Special PULS Overload Design (see diagram overleaf), so in case of overload <ul style="list-style-type: none"> • no disconnection, no hiccup • high overload current (up to 1.9 I_{Nom}), V_{out} is gradually reduced with increasing current. Moreover 20% power boost (6A short-term, at 45°C or forced cooling even continuous)

Advantages:

- High short-circuit current, giving large 'start-up window': unit starts reliably even with awkward loads (DC-DC converters, motors).
- No 'sticking' such as can occur with fold-back characteristics
- Secondary fuses operate reliably

Further information


For further information, especially about

- EMC
 - Connections
 - Safety, Approvals
 - Mechanics und Mounting,
- see page 2 of the „The SilverLine“ data sheet.

For detailed dimensions


see SilverLine mechanics data sheet SL2.5/ SL5/ SL10

Output characteristic (min.)

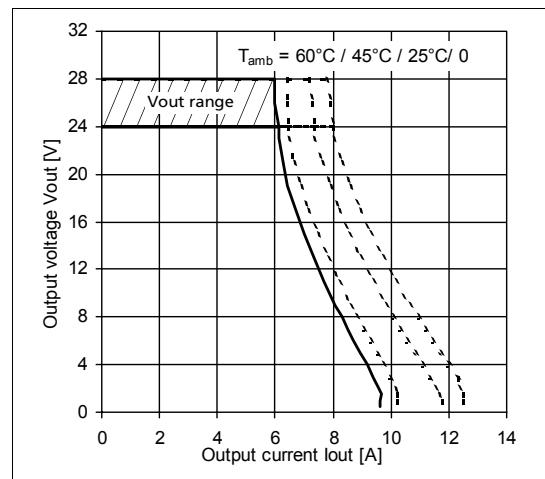


Output Current over Input Voltage

(min., at $V_{out}=24V$)

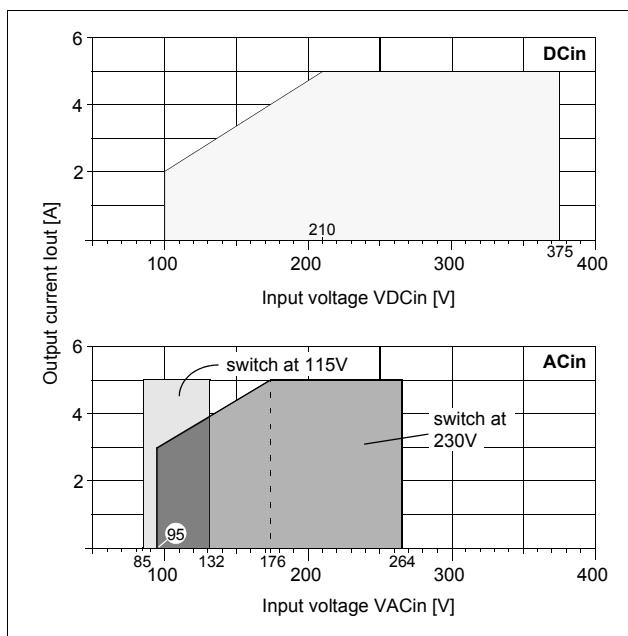

Hold-up time (min., at $V_{out}=24V$)

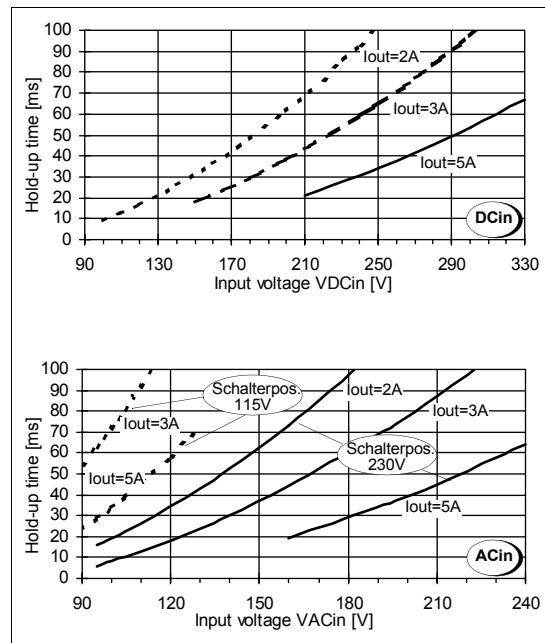

Unless otherwise stated, specifications are valid for AC 230V input voltage, +25°C ambient temperature, and 5 min. run-in time. They are subject to change without prior notice.

Your partner in power supply:



EPSMA
European Power Supply Manufacturers Association

AWARDED
Bayerns Best 50
Czech 100 Best
EuropeOs 500

PULS GmbH
Arabellastraße 15
D-81925 München
Tel.: +49 89 9278-0
Fax: +49 89 9278-199
www.puls-power.com