



8620 & 8670 Rocker Switches - 3 Positions 10A 250Vac

rocker switches

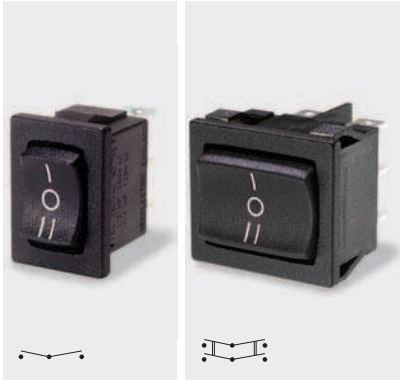

- ▶ 3 position miniature rocker switch
- ▶ Ratings up to 15A, 250Vac
- ▶ Single & double pole
- ▶ Centre off switching
- ▶ Push on, solder and PCB terminals
- ▶ Matching indicators
- ▶ Panel cut out:
single: 19.3 x 12.9
double: 19.3 x 21.9



Approvals and specifications



10(4)A 250Vac T90



- UL CSA 15A 277Vac (Single pole)
- UL CSA 250Vac 1/2hp (Single pole)
- UL CSA 125Vac 1/4hp (Single pole)
- UL CSA 10A 277Vac (Double pole)
- UL CSA 277Vac 1/2hp (Single & Double pole)
- UL 90°C, file E45221, CSA file LR10990

μ contact gap.
Technical data on pages 4 & 5.


H 8620 V B - - -

TERMINAL FUNCTION ROCKER BODY PRINT, COLOUR, ETC


▶ TERMINAL	▶ FUNCTION	▶ ROCKER	▶ BODY	▶ OPTIONS
<p>H</p> <p>4.8 x 0.8</p>	<p>8620</p> <p>ON - OFF - ON Single pole</p>	<p>V Curved</p>	<p>B Single pole</p> <p>Panel thickness: 12.9, 0.75-1.24, 1.25-1.99, 2.00-3.00 Dim X: 15.0, 19.1/19.2, 19.3/19.4, 19.7/19.8</p>	<p>Finish Matt finish only.</p> <p>Colour Call sales for custom colours. A full range is available for large orders.</p> <p>Legend printing Select from the examples or call sales for custom legend.</p> <p>Protective covers IP65 L167 for SP L180 for DP Snaps on to body, this reduces panel thickness by 0.8mm.</p>
<p>T</p> <p>Ø2.15</p> <p>Solder</p>	<p>8670</p> <p>ON - OFF - ON Double pole</p>	<p>H Slotted for actuator (8620 only)</p>	<p>B Double pole</p> <p>Panel thickness: 21.9, 0.75-1.24, 1.25-1.99, 2.00-3.00 Dim X: 24.0, 19.1/19.2, 19.3/19.4, 19.7/19.8</p>	
<p>X</p> <p>4.0</p> <p>PCB 0.8sq</p> <p>Double pole switches with X terminals are supplied without terminal barriers</p>			<p>Cut-outs must be punched in the direction of insertion</p>	

Dimensions (mm)


8620VB (H terminals shown)



8670VB (H terminals shown)



8670VB (X terminals shown)



CL141



CL142