



CHB200 SERIES

165 TO 200 WATT 2:1 INPUT DC-DC CONVERTERS SINGLE OUTPUT

FEATURE

- *165 - 200W Isolated Output
- * Efficiency to 93%
- * Fixed Switching Frequency
- * Input under-voltage Protection
- * Over Temperature Protection
- * Over Voltage/Current Protection
- * Remote ON/OFF
- * Industry Standard Half-Brick Package
- * Fully Isolated 1500VDC
- * No Tantalum Capacitor Inside



MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.	Capacitor Load max.
			MIN.	MAX.	NO LOAD	FULL LOAD		
CHB200-24S3V3	18-36VDC	3.3VDC	0mA	50A	140mA	7.64A	90	10000µF
CHB200-24S05	18-36VDC	5VDC	0mA	40A	240mA	9.16A	91	10000µF
CHB200-24S12	18-36VDC	12VDC	0mA	16.7A	230mA	9.03A	92.5	10000µF
CHB200-24S24	18-36VDC	24VDC	0mA	8.3A	40mA	9.12A	91	2200µF
CHB200-24S48	18-36VDC	48VDC	0mA	4.2A	70mA	9.23A	91	2000µF
CHB200-48S3V3	36-75VDC	3.3VDC	0mA	50A	80mA	3.80A	90.5	10000µF
CHB200-48S05	36-75VDC	5VDC	0mA	40A	120mA	4.55A	91.5	10000µF
CHB200-48S12	36-75VDC	12VDC	0mA	16.7A	90mA	4.49A	93	10000µF
CHB200-48S24	36-75VDC	24VDC	0mA	8.3A	50mA	4.56A	91	2200µF
CHB200-48S48	36-75VDC	48VDC	0mA	4.2A	60mA	4.59A	91.5	2000µF

NOTE: 1. Nominal Input Voltage 24,48 VDC

2. The output terminal of 48Vout models required a minimum capacitor 47uF to maintain specified regulation.

SPECIFICATIONS

All Specifications Typical At Nominal Line, Full Load, and 25°C Unless Otherwise Noted

INPUT SPECIFICATIONS:

Input Voltage Range	24V	18-36V
	48V	36-75V
Input Surge Voltage (100ms max.)	24V	50Vdc max.
	48V	100Vdc max.
Under voltage lockout	24Vin power up	17V
	24Vin power down	16V
	48Vin power up.....	35V
	48Vin power down	33V

Positive Logic Remote ON/OFF:

Logic Compatibility	Open Collector ref to -Input
Module ON	> 3.5Vdc to 75Vdc or Open Circuit
Module OFF	< 1.2Vdc

Input Filter


OUTPUT SPECIFICATIONS:

Voltage Accuracy:	±1.5% max.
Transient Response:25% Step Load Change	<500u sec.
External Trim Adj. Range (note 5)	±10%
Ripple & Noise, 20MHz BW	
3.3V & 5V	40mV RMS, 100mV pk-pk max.,
12V	60mV RMS, 120mV pk-pk max.
24V	100mV RMS, 240mV pk-pk max.
48V	200mV RMS, 480mV pk-pk, max.
Temperature Coefficient	±0.03%/°C
Short Circuit Protection	Continuous
Line Regulation(note 1)	±0.2% max.
Load Regulation(note 2)	±0.2% max.
Over Voltage Protection trip Range, % Vo nom.	115-140%
Current Limit	105% ~140% Nominal Output
Start up time	150ms typ.

CASE HB

All Dimensions In Inches(mm)

Tolerances Inches: X.XX= ±0.02 , X.XXX= ±0.010
 Millimeters: X.X= ±0.5 , X.XX=±0.25

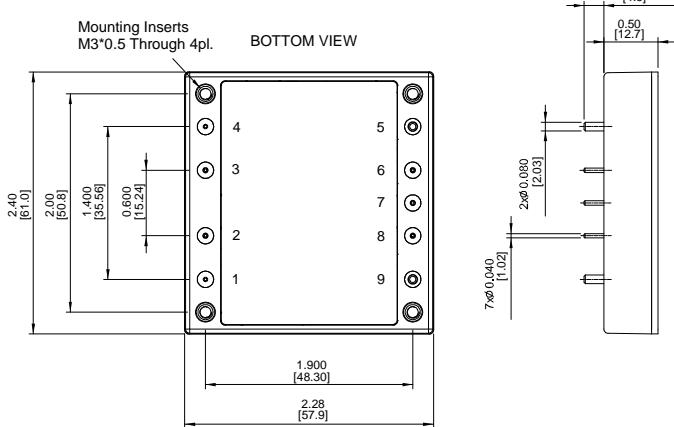


GENERAL SPECIFICATIONS:

Efficiency	See Table
Isolation Voltage ... Input/Output, Input/Case, Output/Case ...	1500VDC min.
Isolation Resistance	10 ⁷ ohm min.
Isolation Capacitance	1000pF typ.
Switching Frequency.....	3V3 200KHz typ.
	5V 300KHz typ.
	12V&24V&48V . 330kHz typ.
Operating Case Temperature	-40°C to 100°C
Storage Temperature	-55°C to +105°C
Thermal Shutdown, Case Temp.....	110°C typ.
Humidity.....	95% RH max. Non condensing
MTBF	MIL-STD-217F, GB, 25°C, Full Load T.B.D. hrs typ.
Dimensions	2.28×2.40×0.52 inches (57.9×61.0×13.2 mm)
Case Material	Aluminum Baseplate with Plastic Case
Weight	114g

NOTE:

1. Measured From High Line to Low Line
2. Measured From Full Load to Zero Load
3. Output Ripple and Noise measured with 10uF tantalum and 1uF ceramic capacitor across output
4. Suffix "N" to the Model Number with Negative Logic Remote ON/OFF Module ON < 1.2Vdc
Module OFF >3.5Vdc to 75Vdc or Open Circuit
5. Trim-up.....connect a resistor between the trim pin and +Sense
Trim-down.....connect a resistor between the trim pin and -Sense
6. The input terminal recommend to parallel with 100uF for 48Vin and 220uF for 24Vin ESR<0.7Ω to reduce the input ripple voltage.

REMOTE ON/OFF CONTROL

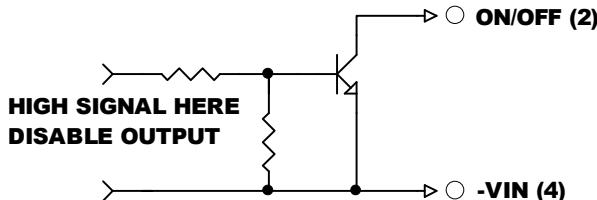

EXTERNAL OUTPUT TRIM

