

Surface Mount Bandpass Filter

SXBP-202+

50Ω 198 to 206 MHz

The Big Deal

- Flat group delay, (0.6 ns typical)
- Narrow band, (3.96% fractional Bandwidth)
- High Wideband rejection,
40 dB from 290-2000 MHz
- Miniature shielded package



CASE STYLE: HF1317

Product Overview

The SXBP-202+ is a flat group delay bandpass filter fabricated using SMT technology. Covering 202 MHz \pm 4 MHz, these units offer good matching within the passband and high rejection. This unit uses a miniature high Q capacitors and wire welded inductors for high reliability. It has repeatable performance across production lots and consistent performance across temperature.

Key Features

Feature	Advantages
Flat group delay characteristics	This model has a group delay flatness of 0.6 ns typical which in reducing the signal distortion
High rejection (40 dB)	Achieving 40 dB rejection over the wide stopband range 290-2000 MHz will be used for suppressing harmonics.
Small size, 0.44" x 0.74" x 0.19"	The surface mount package enables the SXBP-202+ to be used in compact designs.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Surface Mount Bandpass Filter

SXBP-202+

50Ω 198 to 206 MHz



CASE STYLE: HF1317
PRICE: \$22.95 ea. QTY (1-9)

Features

- Flat group delay over passband, (0.6 ns typical)
- High rejection 40 dB
- Miniature shielded package
- Aqueous washable


Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	—	—	202	—	MHz	
	Insertion Loss	F1-F2	198-206	—	3.4	5	dB
	VSWR	F1-F2	198-206	—	1.9	2.3	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC-160	20	32	—	dB
	VSWR	DC-F3	DC-160	—	33	—	:1
Stop Band, Upper	Insertion Loss	F4-F5	250-2700	20	31	—	dB
	VSWR	F4-F5	250-2700	—	27	—	:1

Applications

- Test equipments
- Receivers / transmitters
- Harmonic rejection
- Military

Functional Schematic

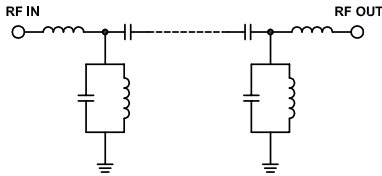


Maximum Ratings	
Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.4W max.

Permanent damage may occur if any of these limits are exceeded.





Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
1	75.13	59.91	198.00	23.00
75	59.39	56.04	198.50	22.82
160	32.09	34.75	199.00	22.76
171	16.22	12.09	199.50	22.71
176	8.14	4.38	200.00	22.67
180	4.73	2.37	200.50	22.66
198	3.16	1.62	201.00	22.63
202	3.18	1.67	201.75	22.60
206	3.33	1.61	202.00	22.57
216	6.29	2.41	202.25	22.55
223	12.50	6.21	202.75	22.60
236	24.29	17.39	203.25	22.60
250	33.82	29.96	203.50	22.62
300	56.65	72.39	203.75	22.69
500	71.14	133.63	204.00	22.74
1000	74.29	96.51	204.50	22.83
1500	64.70	62.05	204.75	22.84
2000	50.37	57.91	205.00	22.86
2500	38.18	48.26	205.50	22.92
2700	34.48	46.96	206.00	23.03

Typical Frequency Response



+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

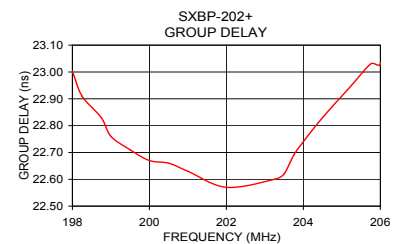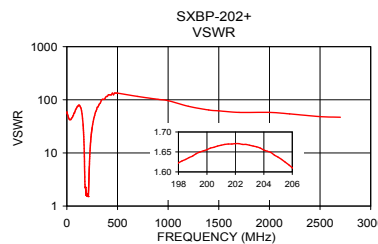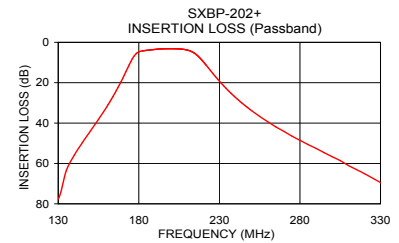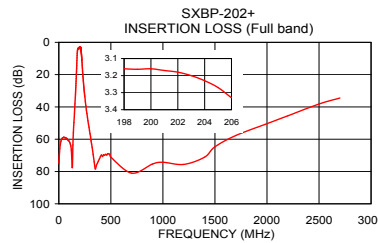

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M144165
SXBP-202+
EDU1490
URJ
140103
Page 2 of 3

Pad Connections

INPUT	1
OUTPUT	8
GROUND	2,3,4,5,6,7

Demo Board MCL P/N: TB-368
Suggested PCB Layout (PL-230)

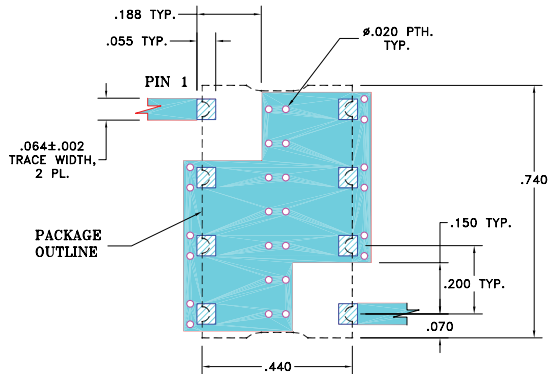


NOTE:

- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS: .025" ± .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Drawing

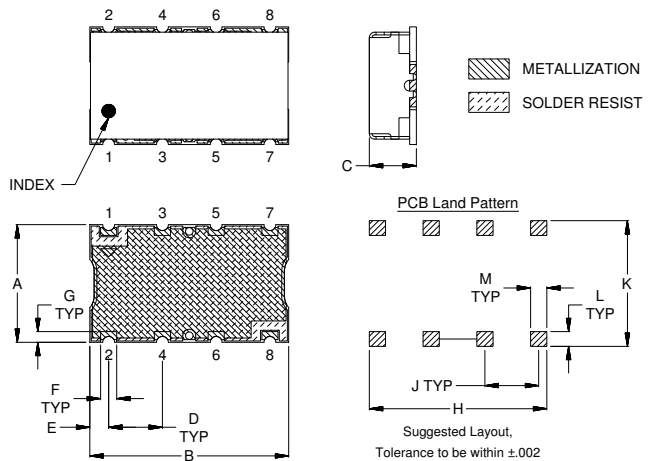

Outline Dimensions (inch)

A	B	C	D	E	F	
.440	.740	.190	.200	.070	.060	
11.18	18.80	4.83	5.08	1.78	1.52	
G	H	J	K	L	M	Wt.
.040	.660	.200	.470	.055	.060	grams
1.02	16.76	5.08	11.94	1.40	1.52	3.0

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp