

High Pass Filter

HFCN-4400D+

50Ω 5000 to 10100 MHz

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	7W max. at 25°C
Max. DC Voltage at pins 1&3	25 VDC

*Passband rating, derate linearly to 3W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

Pin Connections

RF IN	1
RF OUT	3
GROUND	2,4,5,6


Outline Drawing

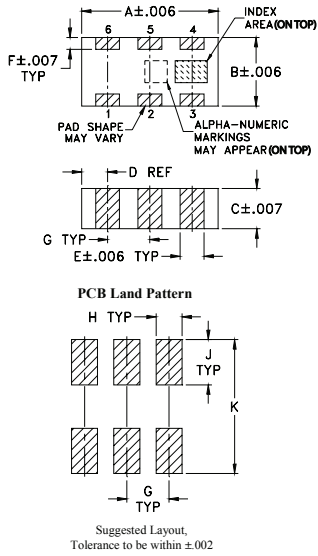

Outline Dimensions (inch/mm)

A	B	C	D	E	F	
.126	.063	.035	.024	.022	.011	
3.20	1.60	0.89	0.61	0.56	0.28	
G	H	J	K		wt	
.039	.024	.042	.123		grams	
0.99	0.61	1.07	3.12			

Demo Board MCL P/N: TB-285 Suggested PCB Layout (PL-158)

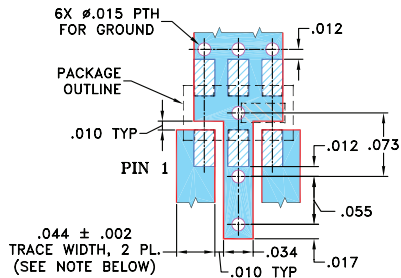

- NOTE: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350 WITH DIELECTRIC THICKNESS: .020 ± .0015; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT
- DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Features

- Low cost
- Small size
- 5 sections
- Temperature stable
- Excellent power handling, 7W
- Hermetically sealed
- LTCC construction
- Protected by US Patent 7,760,485

Applications

- Sub-harmonic rejection and DC blocking
- Transmitters / receivers



CASE STYLE: FV1206-1
PRICE: \$3.49 ea. QTY (20)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel at no extra cost


Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000, 3000

Electrical Specifications^{1,2} at 25°C


STOPBAND (MHz)		fco, MHz Nom.	PASSBAND (MHz)		VSWR Typ.	POWER INPUT (W)	NO. OF SECTIONS
(Loss > 30dB) Typ.	(Loss > 20dB) Min.	(Loss 3 dB) Typ.	(Loss < 1.5dB) Max.	(Loss < 2dB) Max.	Frequency (MHz) 1.5:1	Max.	
3600	3500	4400	5000-9900	5000-10100	20:1	4600-10100	7

- 1. DC Resistance to ground is 100 Mohms min.
- 2. Measured on Mini-Circuits Characterization Test Board TB-285.

typical frequency response



electrical schematic



Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
50	60.22	1737.18
500	41.29	868.59
2500	52.10	78.97
3500	32.81	37.77
3600	36.38	34.75
3850	24.31	24.83
4050	14.01	15.00
4200	8.13	7.94
4400	3.09	2.73
4600	1.48	1.44
5000	1.24	1.65
9900	0.65	1.22
10100	0.71	1.33
10500	0.93	1.60
11500	2.12	2.37
13000	3.33	3.66
16000	5.02	2.47

