

Connectorized Band Stop Filter

NSBP-108+


50Ω 88 to 108 MHz

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W at 25°C

Permanent damage may occur if any of these limits are exceeded.


Outline Drawing

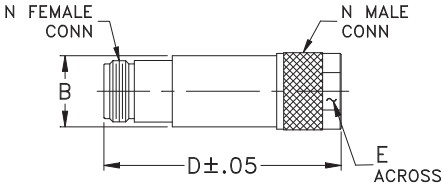


Outline Dimensions (inch/mm)

B	D	E	wt.
.68	2.43	.718	grams
17.27	61.72	18.24	73.0

Functional Schematic

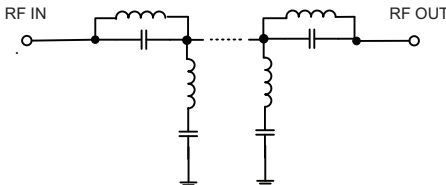

Typical Frequency Response

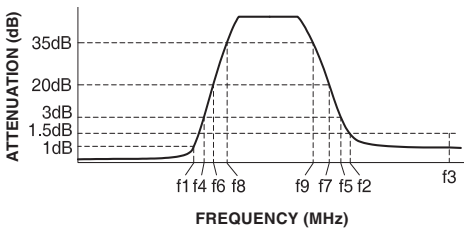

Features

- High FM Frequency Rejection
- Good Return Loss, 20 dB Typ @ Pass Band

Application

- FM Radio Rejection
- Transmitters/Receivers
- Lab Use



CASE STYLE: FF967

Connectors	Model	Price	Qty.
N-type	NSBP-108+	\$129.00 ea.	(1-9)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Band Stop Filter Electrical Specifications (T_{AMB} = 25°C)

MODEL NO.	STOPBANDS (MHz)		Loss 3dB Typ. f4, f5	PASSBANDS (MHz)		VSWR (:1)	
	(Loss > 20dB) f6-f7	(Loss > 35dB) f8-f9		Loss < 1dB f1	Loss < 1.5dB f2,f3	Stopband Typ.	Passband Typ.
NSBP-108+	88-108	89-105	81 & 120	65	140-1000	3.4	1.3


Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1	0.02	1.01
65	0.48	1.13
70	0.72	1.10
75	1.21	1.18
81	3.11	1.39
83	4.96	1.40
87	27.99	3.88
88	37.25	4.32
89	47.24	4.64
90	57.09	4.88
105	44.40	4.17
108	26.23	2.90
109	20.24	2.32
116	4.13	1.56
120	2.72	1.38
140	1.00	1.16
150	0.76	1.09
300	0.34	1.16
600	0.37	1.21
1000	0.49	1.31

NSBP-108+
INSERTION LOSS

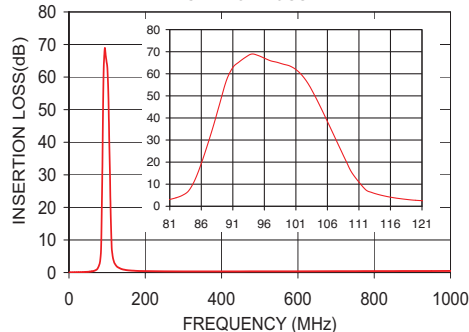

NSBP-108+
VSWR

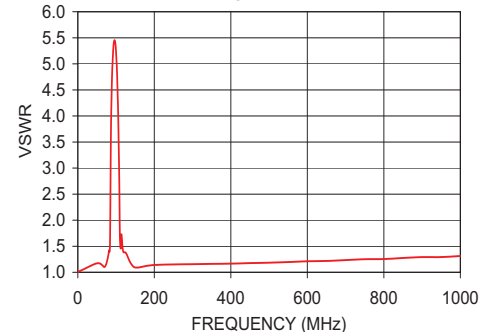

For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuits' applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. B
M108294
EDU-0409
NSBP-108+
RAV/URJ
121015
Page 1 of 1