


ULTRA·REL[®] Ceramic Hermetic Frequency Mixers

MAC Series

300 MHz to 12 GHz LO Levels 4 to 17 dBm



CASE STYLE: DZ1650

The Big Deal

- 3-Year Guarantee
- Hermetically sealed LTCC construction
- Low-profile case, 0.06" high
- Priced for outstanding VALUE

Product Overview

Mini-Circuits MAC mixers employ a unique new design and a highly repeatable, tightly controlled, automated process that delivers industry-leading reliability at a remarkably affordable price. Schottky diode quads meeting our strict specifications are bonded to a multilayer integrated LTCC substrate, and then hermetically sealed under a controlled atmosphere with gold-plated covers and eutectic AuSn solder. These passive, double-balanced mixers have been tested to MIL requirements for gross leak, fine leak, thermal shock, vibration, acceleration, mechanical shock, and HTOL, and every MAC mixer is backed with our 3-year guarantee.

[Click here for more about the MAC mixer](#)

Key Features

| Feature | Advantages |
|-----------------------------------|--|
| Low, Flat Conversion Loss | No need to compensate for variations over frequency. |
| Hermetically Sealed | Ideal for use anywhere long-term reliability adds bottom-line value: high moisture areas, busy production lines, high-speed distribution centers, heavy industry, outdoor settings, and unmanned facilities, as well as military applications. |
| Rugged LTCC/Hermetic Construction | Demonstrated reliability in harsh, physically abusive environments with high vibration, acceleration, and/or mechanical shock. |
| Wide Operating Temperature Range | Guaranteed performance from -55 to +125°C. MAC mixers have also passed thermal shock testing from -55 to +150°C, through 1000 cycles, 15 minutes per cycle. |
| Exposed Termination Ends | Our unique case design allows for easy visual inspection of side solder fillets per IPC-A-610 section 8.3.4.6, and features gold-plated terminations for excellent solderability. |
| Incredible Performance/Price | Game-changing affordability brings Hi-Rel hermetic mixers within the reach of commercial budgets. |



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Ceramic, Hermetically Sealed Frequency Mixer WIDE BAND

MAC-12G+

Level 7 (LO Power+7 dBm) 3800 to 12000 MHz



CASE STYLE: DZ1650
PRICE: \$8.95 ea. QTY (10)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel at no extra cost

| Reel Size | Devices/Reel |
|-----------|---------------------------|
| 7" | 10, 20, 50, 100, 200, 500 |
| 13" | 1000 |

Maximum Ratings

| | |
|-----------------------|----------------|
| Operating Temperature | -55°C to 125°C |
| Storage Temperature | -65°C to 150°C |
| RF Power | 50 mW |
| IF Current | 40 mA |

Permanent damage may occur if any of these limits are exceeded.

Pin Connections

| | |
|--------|---------------|
| LO | 10 |
| RF | 5 |
| IF | 3 |
| GROUND | 1,2,4,6,7,8,9 |

Features

- wide bandwidth, 3800 to 12000 MHz
- low conversion loss, 6.0 dB typ.
- LTCC double balanced mixer
- aqueous washable
- low cost
- low profile, 0.060"
- protected by US Patent 7,027,795
- 3-YEAR GUARANTEE - The Most Reliable Mixers

Applications


- satellite up and down converters
- line of sight links
- defense radar
- defense communications
- federal fixed service

Electrical Specifications at 25°C

| Parameter | Condition (MHz) | Min. | Typ. | Max. | Units |
|------------------------------------|-----------------|--------------|------|------|-------|
| Frequency Range, LO/RF | | 3800 - 12000 | | | MHz |
| Frequency Range, IF | | DC - 1800 | | | MHz |
| Conversion Loss* | 3800 - 6500 | — | 5.6 | 7.7 | dB |
| | 6500 - 9500 | — | 5.9 | 8.2 | |
| | 9500 - 12000 | — | 6.0 | 8.2 | |
| LO to RF Isolation | 3800 - 6500 | 22 | 32 | — | dB |
| | 6500 - 9500 | 27 | 38 | — | |
| | 9500 - 12000 | 18 | 26 | — | |
| LO to IF Isolation | 3800 - 6500 | 8 | 13 | — | dB |
| | 6500 - 9500 | 28 | 39 | — | |
| | 9500 - 12000 | 14 | 23 | — | |
| IP3 | 3800 - 6500 | — | 10 | — | dBm |
| | 6500 - 9500 | — | 7 | — | |
| | 9500 - 12000 | — | 10 | — | |
| RF Input Power at 1 dB Compression | | +14 | | | dBm |

*Conversion Loss measured at 30 MHz IF.


Outline Drawing

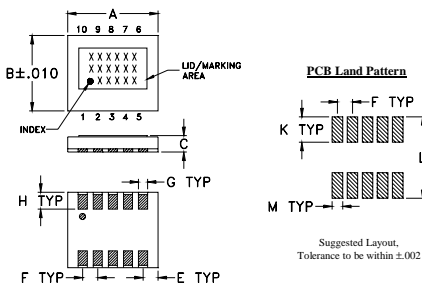

Outline Dimensions (inch/mm)

| A | B | C | D | E | F | G |
|------|------|------|------|------|-------|------|
| .30 | .250 | .060 | -- | .050 | .050 | .030 |
| 7.62 | 6.35 | 1.52 | -- | 1.27 | 1.27 | 0.76 |
| H | J | K | L | M | wt | |
| .056 | -- | .085 | .270 | .035 | grams | |
| 1.42 | -- | 2.16 | 6.86 | 0.89 | 0.29 | |


Demo Board MCL P/N: TB-144 Suggested PCB Layout (PL-045)

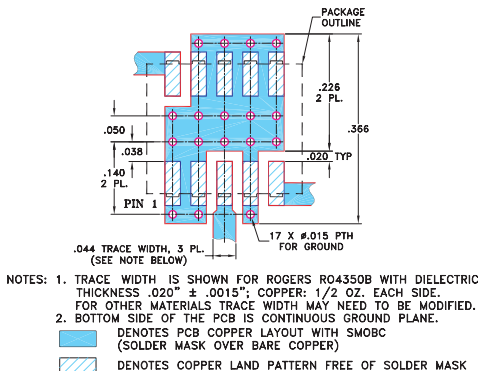

Typical Performance Data at 25°C and LO=+7dBm

| Frequency (MHz) | | Conversion Loss (dB) | Isolation L-R (dB) | Isolation L-I (dB) | VSWR RF Port (:1) | VSWR LO Port (:1) |
|-----------------|---------|----------------------|--------------------|--------------------|-------------------|-------------------|
| RF | LO | +7dBm | +7dBm | +7dBm | +7dBm | +7dBm |
| 3800.1 | 3830.1 | 5.99 | 31.07 | 10.00 | 1.91 | 2.94 |
| 4200.1 | 4230.1 | 5.27 | 30.81 | 11.42 | 1.75 | 2.96 |
| 4600.1 | 4630.1 | 5.04 | 26.94 | 12.37 | 1.62 | 3.01 |
| 5000.1 | 5030.1 | 4.87 | 29.19 | 12.85 | 1.74 | 3.04 |
| 5400.1 | 5430.1 | 6.00 | 28.42 | 14.42 | 2.30 | 3.07 |
| 5800.1 | 5830.1 | 6.41 | 23.66 | 17.11 | 1.62 | 3.11 |
| 6200.1 | 6230.1 | 5.42 | 27.88 | 23.68 | 1.27 | 3.48 |
| 6600.1 | 6630.1 | 5.21 | 33.16 | 30.31 | 1.16 | 3.58 |
| 7000.1 | 7030.1 | 6.24 | 35.43 | 35.14 | 1.96 | 3.49 |
| 7400.1 | 7430.1 | 5.63 | 37.74 | 37.00 | 2.13 | 3.20 |
| 7800.1 | 7830.1 | 5.46 | 38.95 | 37.21 | 2.50 | 2.56 |
| 8200.1 | 8230.1 | 5.90 | 38.84 | 39.61 | 2.83 | 1.83 |
| 8600.1 | 8630.1 | 6.44 | 34.18 | 43.03 | 3.20 | 1.73 |
| 9000.1 | 9030.1 | 6.57 | 38.49 | 48.65 | 3.02 | 1.88 |
| 9400.1 | 9430.1 | 5.86 | 34.37 | 40.17 | 2.71 | 2.35 |
| 9800.1 | 9830.1 | 5.58 | 30.24 | 30.03 | 2.37 | 2.72 |
| 10200.1 | 10230.1 | 5.70 | 30.90 | 19.19 | 1.69 | 2.90 |
| 10800.1 | 10830.1 | 5.58 | 24.14 | 22.91 | 1.18 | 2.38 |
| 11600.1 | 11630.1 | 6.16 | 21.85 | 28.95 | 1.65 | 1.40 |
| 12000.1 | 12030.1 | 6.38 | 24.79 | 23.67 | 1.96 | 1.59 |

Electrical Schematic

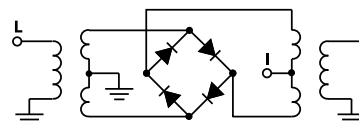

Mini-Circuits
ISO 9001 ISO 14001 AS 9100 CERTIFIED









For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. B
M136739
ED-14156/19
MAC-12G+
DJ/CP/AM
121016
Page 2 of 4

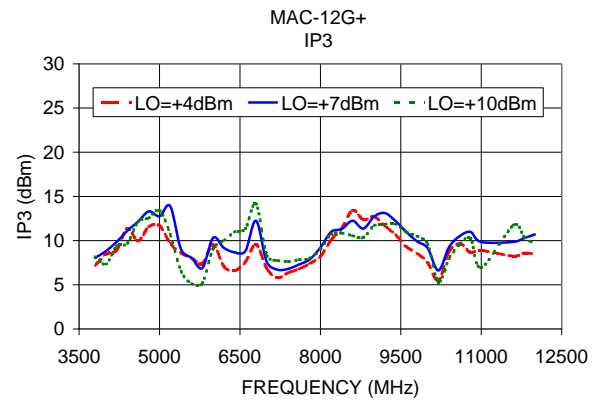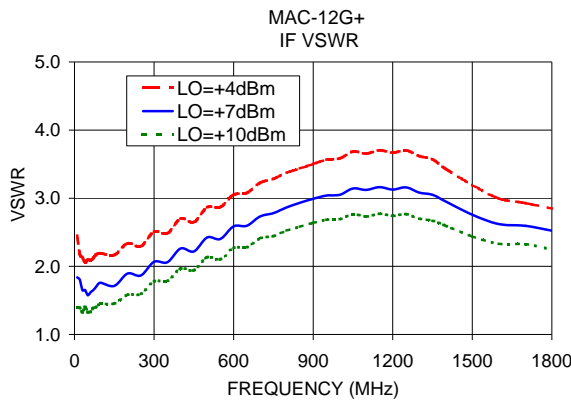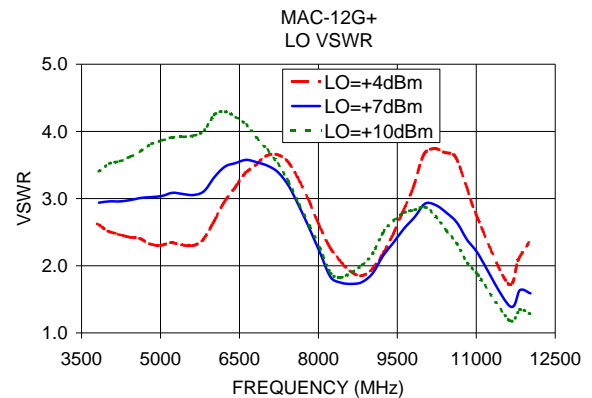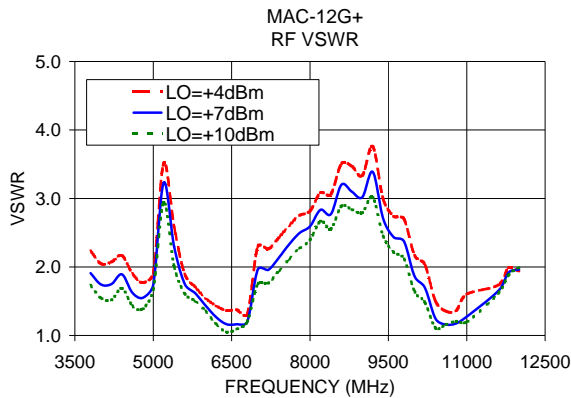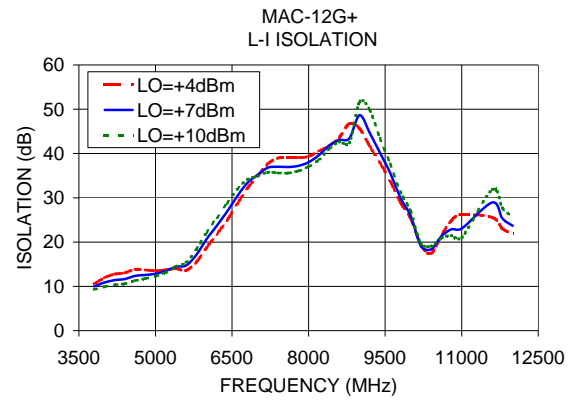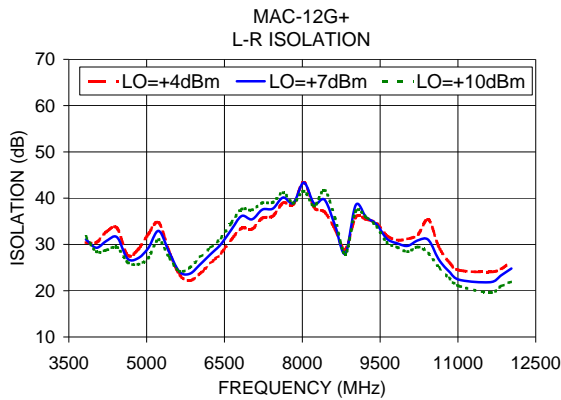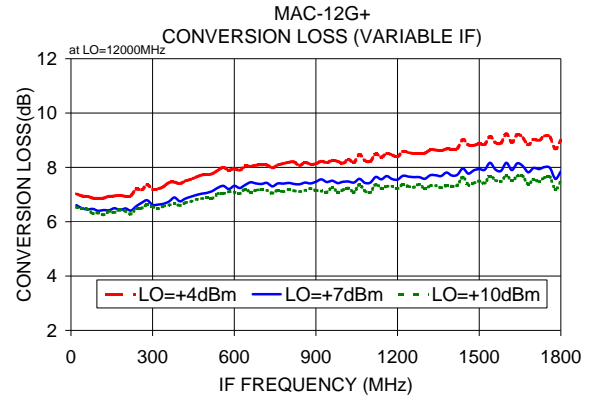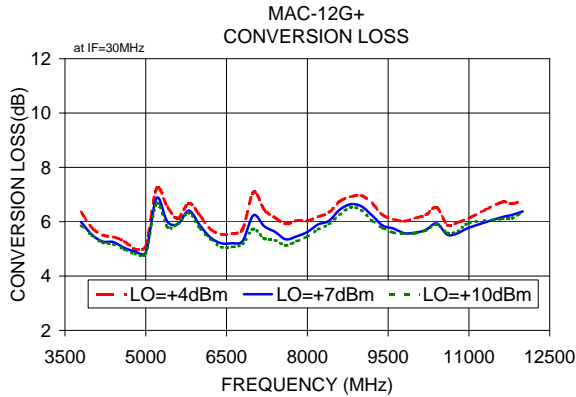


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

Designed and Built for Long-Term Reliability in **HOSTILE ENVIRONMENTS**

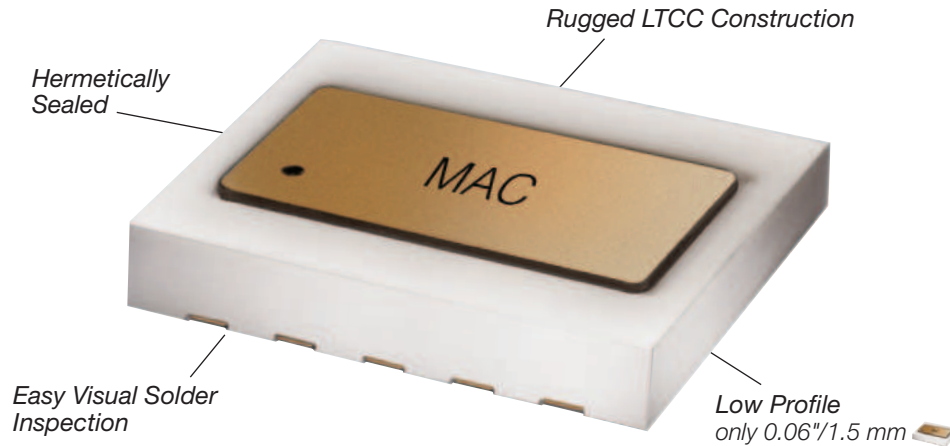

Mini-Circuits MAC mixers meet or exceed the following qualifications:

| | |
|--------------------------|--|
| Gross Leak | MIL-STD-202 Method 112, Condition D (100% of all MAC Mixers we ship) |
| Fine Leak | MIL-STD-202 Method 112, Condition C, Procedure IIIa |
| Thermal Shock | MIL-STD-202 Method 107 (-55/+100°C, 1000 cycles, 15 minutes) (-55/+150°C, 1000 cycles, 15 minutes) |
| Vibration | MIL-STD-202 Method 204, Condition D (10-2000Hz sine, 20g, 3 axis, 12 c.y.ea.) |
| Acceleration | MIL- STD-883 Method 2001, Condition E |
| Mechanical Shock | MIL-STD-202 Method 213, Condition A |
| HTOL | MIL-STD-202 Method 108, Condition D (1000 hours, 125°C, at rated LO level) |
| Multiple Reflow | JESD22-B102 |
| Bend Test | JESD22-B113 |
| Adhesion Strength | Push test >10lb |



All Photos courtesy of U.S. Military and NASA

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS

For detailed performance specs
& shopping online see web site

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.