

# Surface Mount Power Splitter/Combiner

3 Way-0° 50Ω 1 to 300 MHz

AD3PS-1+



CASE STYLE: CJ725  
PRICE: \$9.95 ea. QTY. (10-49)

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

## Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.25W max.

Permanent damage may occur if any of these limits are exceeded.


## Pin Connections

SUM PORT	1
PORT 1	8
PORT 2	5
PORT 3	4
GROUND	2,3,6,7

## Outline Drawing



### PCB Land Pattern




Suggested Layout

## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.397	.032	.385	.435	.310	.215	.100
10.08	0.81	9.78	11.05	7.87	5.46	2.54
H	J	K	L	M	N	P
.015	.025	.035	.075	.120	.060	.420
0.38	0.64	0.89	1.91	3.05	1.52	10.67
						wt
						grams
						0.45

## Demo Board MCL P/N: TB-83 Suggested PCB Layout (PL-063)

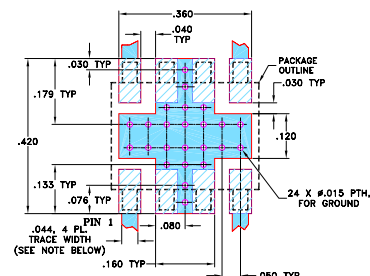

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.020" ± 0.0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
3. DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
4. DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Features

- wideband, 1 to 300 MHz
- high isolation, 35 dB typ.
- good input port matching VSWR, 1.12 typ.
- good output port matching VSWR, 1.14 typ.
- small surface mount package

## Applications

- VHF-TV
- aircraft communications

## Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)			INSERTION LOSS (dB) ABOVE 4.8 dB			PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)								
	L	M	U	L	M	U	L	M	U	L	M	U						
f <sub>L</sub> -f <sub>U</sub>	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.						
1-300	40	23	35	20	27	18	0.3	0.8	0.4	1.0	0.8	1.5	1	4	6	0.2	0.3	0.5

L = 1-10 MHz M = 10-150 MHz U = 150-300 MHz

## Typical Performance Data

Freq. (MHz)	Total Loss <sup>1</sup> (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3
	S-1	S-2	S-3		1-2	1-3	2-3					
1.00	5.15	5.16	5.17	0.01	36.32	40.91	35.31	0.04	1.10	1.24	1.26	1.25
4.00	5.05	5.06	5.06	0.01	42.83	45.40	44.11	0.04	1.04	1.13	1.13	1.13
7.00	5.05	5.06	5.06	0.01	43.56	45.44	46.46	0.09	1.04	1.11	1.12	1.12
10.00	5.06	5.06	5.06	0.01	43.53	45.25	46.58	0.11	1.04	1.11	1.11	1.11
20.00	5.08	5.08	5.09	0.01	42.24	43.79	43.05	0.16	1.04	1.10	1.10	1.11
40.00	5.11	5.12	5.12	0.00	38.90	40.37	37.60	0.35	1.06	1.10	1.10	1.10
60.00	5.14	5.14	5.15	0.01	36.16	37.63	34.33	0.51	1.08	1.10	1.11	1.11
100.00	5.21	5.20	5.21	0.00	32.45	33.97	30.23	0.89	1.12	1.11	1.12	1.12
120.00	5.24	5.24	5.23	0.01	31.12	32.66	28.79	1.05	1.14	1.11	1.12	1.12
200.00	5.42	5.40	5.39	0.03	27.39	29.05	24.87	1.69	1.21	1.14	1.16	1.15
220.00	5.47	5.44	5.42	0.05	26.68	28.34	24.14	1.84	1.23	1.15	1.17	1.16
240.00	5.54	5.50	5.48	0.06	25.96	27.65	23.43	1.93	1.25	1.15	1.18	1.17
260.00	5.63	5.57	5.55	0.08	25.24	26.92	22.74	2.15	1.27	1.16	1.19	1.18
280.00	5.71	5.65	5.63	0.09	24.50	26.14	22.04	2.25	1.29	1.18	1.21	1.19
300.00	5.82	5.74	5.71	0.11	23.71	25.31	21.33	2.39	1.31	1.19	1.23	1.21

1. Total Loss = Insertion Loss + 4.8dB splitter loss.

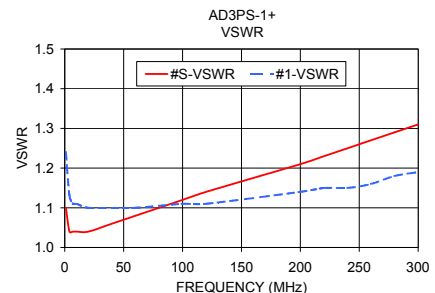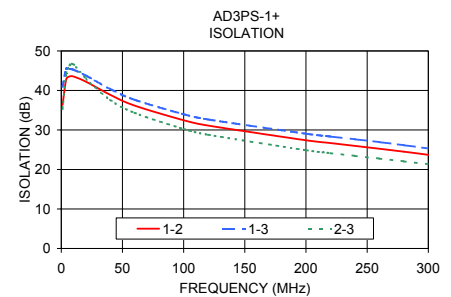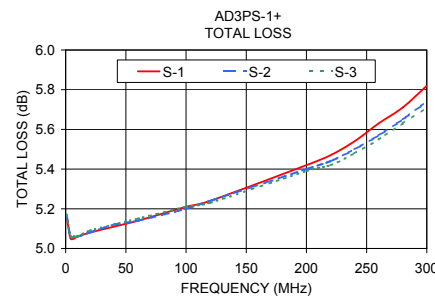

## electrical schematic



**Mini-Circuits**  
ISO 9001 ISO 14001 AS 9100 CERTIFIED  
IF/RF MICROWAVE COMPONENTS

For detailed performance specs & shipping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

REV. H  
M127604  
ED-7781/1  
AD3PS-1+  
HY/TD/CP/AM  
120322