
## Pomona®

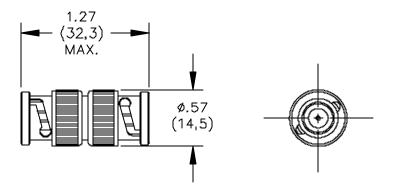

**MATERIALS:** 

Body – Brass, Tarnish Resistant Plating, Center Contact: Gold Plated Brass Dielectric: PTFE Finish: Body and Fittings – Tarnish Resistant Center Contact – Gold Plated Marking: "Pomona 3533"

## **RATING:**

Operating Voltage: Shield/Earth: 30VAC/60VDC Max. Inner Conductor/Shield: 500VRMS Max. Operating Temperature: -65°C to +165°C Nominal Impedance: 50 Ohms

## **ORDERING INFORMATION:** Model 3533

All dimensions are in inches and metric. All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

 5/28/02 SY/EH/LS
 Sales: 800-490-2361 Fax: 888-403-3360

 Last saved by PN
 Technical Assistance: 800-241-2060

S:\Engineering\Release\DataSheets\FlukeDataSheet\d3533\_1\_02.doc