



## 

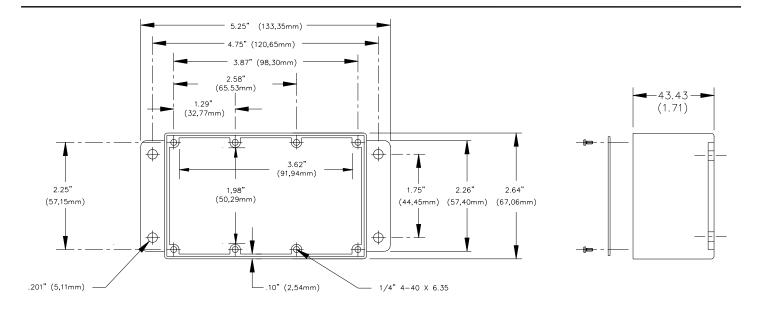

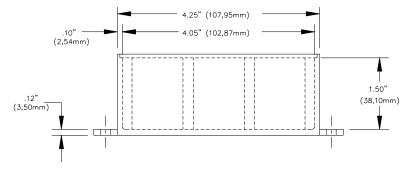

## **MATERIALS:**

Screws: Steel, 8 ea. #4-40 x  $^1\!\!4$  Pan Head (Per MS 35208-12 with clear

irridite)

Cover: .040 Thick aluminum #1100-H14 Finish: Clear anodized per MIL-A-8625

Shielded Housing: Die cast aluminum alloy A380 or A384

Model 2901: Blue baked enamel per Federal Standard 595 #25109 over

primer wash per DOD-P-15328.

Model 2906: Finish: None

## **RATINGS:**

Operating Temperature: +302°F (+150°C) Max.

## **ORDERING INFORMATION:**

Model: 2901 (blue baked enamel) Model: 2906 (bare die cast aluminum)

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.



Model 2906

Sales: 800-490-2361 Fax: 888-403-3360 Technical Support: 800-241-2060 (technical support@pomonatest.com) For "Where to Buy" information, visit the Pomona web site at www.pomonaelectronics.com

Rev: 100

D1094056, D1094058