
Pomona®

Model 2451 BNC Female Panel Receptacle

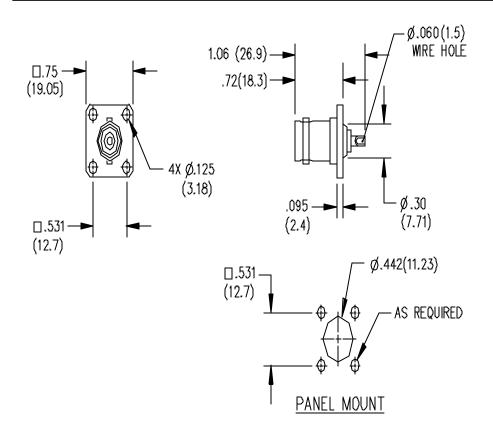

MATERIALS:

Body and Fittings: Brass, Tarnish Resistant Plating Center Contact: Gold Plated Beryllium Copper Dielectric: PTFE Finish: Body and Fittings: Tarnish Resistant Center Contact: Gold Plated

RATING:

Nominal Impedance: 50 Ohms Operating Temperature: -65°C to +165°C

ORDERING INFORMATION: Model 2451

All dimensions are in inches. Tolerances (except noted): $.xx = \pm.02$ " (.51 mm), $.xxx = \pm.005$ " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99	Sales: 909-469-2900	Fax: 909-629-3317
SY/EH/LS	Technical Assistan	
S:\Engineering\Release\DataSheets\FlukeDataSheet\d2451 1 01.doc		