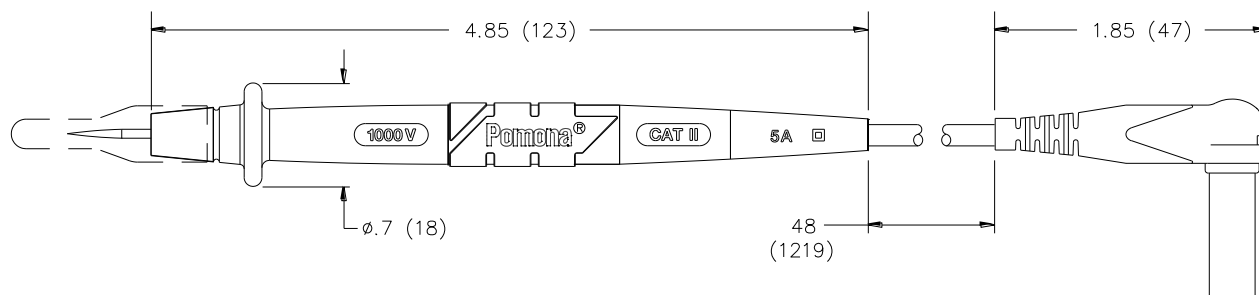


**Model 6477**  
**Replaceable Tip Test Probe Set****FEATURES**

- Replaceable tip probe set with sharp stainless steel tip included. (Other tips are available, see model 6475)
- Designed for most DMM's including Fluke, Wavetek Meterman, Amprobe, and others with safety-sheath banana jack inputs
- Thermoplastic elastomer outer coat provides comfortable grip and flexible strain relief
- Probe and banana plug are molded directly onto the wire for robust pull strength
- Wire is a high strand count silicone wire for extreme flexibility and high temperature resistance
- Wear indication with double insulated (dual extruded) silicone leads shows white inner layer for increased safety
- Banana plug spring is nickel plated Beryllium Copper for long insertion life

**MATERIALS**

Probe:

Outer Insulation: Santoprene® rubber, color: gray

Inner Insulation: Polypropylene, color: one black, one red

Tip: sharp stainless steel

Wire: 18 AWG, 192 x 41 bare copper, Silicone Insulation, O.D. 0.144" (3,66mm)

Banana Plug: Nickel plated Brass

Spring – Nickel plated Beryllium Copper

Plug Insulation: Polypropylene, color: one black, one red

**RATINGS**

IEC 61010-031

Operating Voltage: CAT II 1000 V

Current: 5 Amperes

**ORDERING INFORMATION**

Model 6477

Includes a set of one black and one red test lead with two replaceable tips

**USA:** Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500

**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.