



**Features:**

- Motor: Capacitor-Run Induction Motor
- Motor Protection: Thermal Protected
- Bearing Type: Two Ball
- Connection: UL 1015 AWG 20, 300mm Wire Leads or Terminal
- Frame Material: Aluminum Alloy
- Impeller Material: Plastic UL94V-0
- Operating Temp:  
Two Ball: -10°C~70°C
- Life Expectancy:  
Two Ball: 50,000 Hours



Fan-S Division




| Model No.          | Volt. | Freq. | Current   | Power       | Rated Speed | Maximum AirFlow |         | Maximum Static Pressure |               | Noise Level | Weight |
|--------------------|-------|-------|-----------|-------------|-------------|-----------------|---------|-------------------------|---------------|-------------|--------|
|                    | (VAC) | (Hz)  | (A)       | (W)         | (rpm)       | (CMM)           | (CFM)   | (InAq)                  | (mmAq)        | (dB/A)      | (g)    |
| FKA2-17251NBH** 3F | 115   | 50/60 | 0.25/0.24 | 27.60/26.50 | 2700/3100   | 5.094/5.943     | 180/210 | 0.533/0.700             | 13.538/17.780 | 63.0/65.0   | 1050   |
| FKA2-17251QBH** 3F | 230   | 50/60 | 0.11/0.13 | 23.00/27.60 | 2700/3100   | 5.094/5.943     | 180/210 | 0.533/0.700             | 13.538/17.780 | 63.0/65.0   | 1050   |
| FKA2-17251NBM** 3F | 115   | 50/60 | 0.15/0.19 | 16.10/20.70 | 2500/2500   | 4.386/4.386     | 155/155 | 0.400/0.400             | 10.160/10.160 | 56.6/56.6   | 1050   |
| FKA2-17251QBM** 3F | 230   | 50/60 | 0.08/0.10 | 16.10/20.70 | 2500/2500   | 4.386/4.386     | 155/155 | 0.400/0.400             | 10.160/10.160 | 56.6/56.6   | 1050   |

\*\* Indicates "W" (Wire Leads) or "T" (Terminal)

Noise is measured at the distance of one (1) meter from the axis of intake.

50Hz

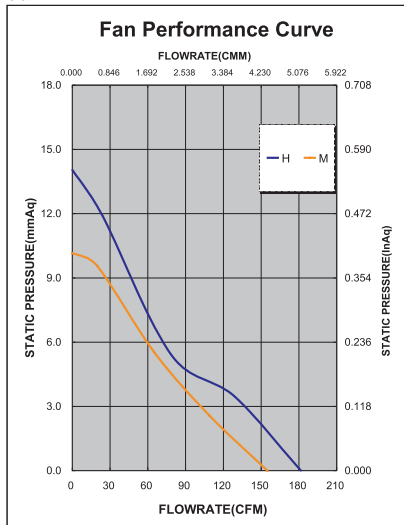

60Hz

