



AAVID
THERMALLOY


Superior Series (PS) 60mm x 60mm x 15mm




- » Bearing Type: FLB, Ball Bearing
- » Function Type (Optional): FG Signal, RD Signal, PWM
- » Protection (Optional):
 - Auto Restart Protection
 - Polarity Reverse Protection
- » Lead Wire:
 - UL 1061 AWG #26 or Equivalent
 - Red Wire: Positive (+)
 - Black Wire: Negative (-)
 - Yellow Wire: FG Signal
 - White Wire: RD Signal
 - Blue Wire: PWM

PS SERIES 6015

DIMENSIONS DRAWING

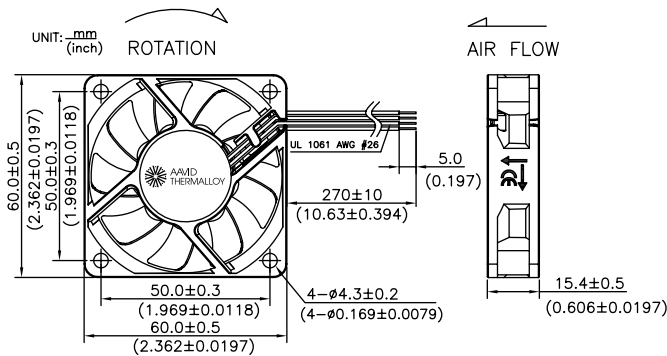

PERFORMANCE CURVES

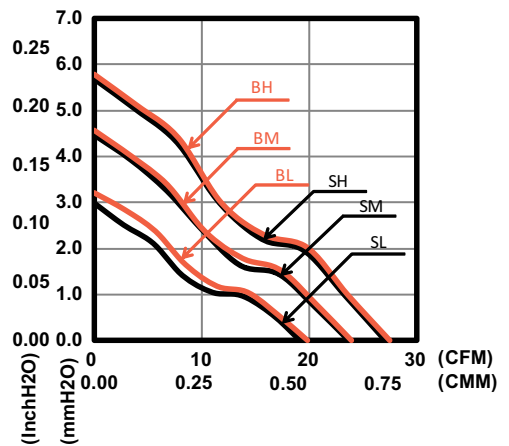

SPECIFICATION



Model	Function Type	Rated Voltage	Operating Voltage	Rated Current	Input Current	Input Power	Rated Speed	Air Flow		Air Pressure		Noise
		VDC	VDC	Amp	Amp	Watt		RPM	CMM	CFM	mmH ₂ O	
PSAD06015SL	P000/PF00	5	4.5~5.5	0.22	0.17	0.85	3600	0.54	19.2	2.99	0.12	27.5
PSAD06015SM	PR00/M000	5	4.5~5.5	0.36	0.28	1.40	4400	0.67	23.7	4.47	0.18	32.5
PSAD16015SL	MF00/MR00	12	6~13.8	0.13	0.10	1.20	3600	0.54	19.2	2.99	0.12	27.5
PSAD16015SM	P000/PF00	12	6~13.8	0.17	0.13	1.56	4400	0.67	23.7	4.47	0.18	32.5
PSAD16015SH	PR00/M000	12	6~13.8	0.22	0.17	2.04	5000	0.77	27.1	5.67	0.22	36.0
PSAD06015BL	MF00/MR00	5	4.5~5.5	0.22	0.17	0.85	3700	0.56	19.8	3.20	0.13	28.5
PSAD06015BM	P000/PF00	5	4.5~5.5	0.36	0.29	1.45	4500	0.68	24.0	4.57	0.18	34.0
PSAD16015BL	PR00/M000	12	6~13.8	0.13	0.08	0.96	3700	0.56	19.8	3.20	0.13	28.5
PSAD16015BM	MF00/MR00	12	6~13.8	0.17	0.13	1.56	4500	0.68	24.0	4.57	0.18	34.0
PSAD16015BH	P000/PF00	12	6~13.8	0.22	0.17	2.04	5100	0.78	27.5	5.78	0.23	37.5

* Specifications are subject to change without notice