




File: E209153



ISO9001:2008 Certified

Mechanical Specifications (mm)

	D:	23.0	± max
	T:	10.0	± max
	Lead Diameter	1.0	± nom
	S:	7.8	± nom
	L:	38.0	± nom
	Coating Lead Run Down (straight Leads)	4.0	± max
	B:	9.20	± nom
	C:	7.60	± nom

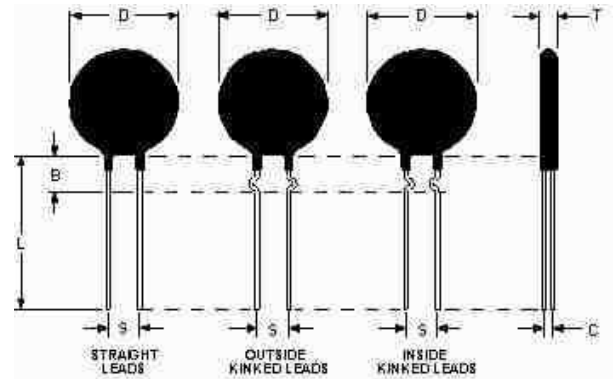

Electrical Specifications

	Resistance:	120.0 Ω	± 25 %
Max Steady State Current upto 65°C:	3.00	A	
Max Rec. Energy Rating:	220	J	
Actual Failure Instantaneous Energy:	450	J	
Maximum Capacitance @ 120 VAC:	15,000	µf	
Maximum Capacitance @ 240 VAC:	3,820	µf	
Maximum Capacitance @ 440 VAC:	883	µf	
Maximum Capacitance @ 680 VAC:	440	µf	
Resistance @ 100% Max Current:	1.28	Ω	
Resistance @ 50% Max Current:	2.65	Ω	
Body Temperature at 100% Max Current:	165.00	°C	
Dissipation Constant:	75.4	mw/°C	
Thermal Time Constant:	124	Sec.	
Material Type (for Beta and Curve):	M		

MS22 12103	
Date: 02/05/2009	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A