




File: E209153



ISO9001:2008 Certified

Mechanical Specifications (mm)

	D:	10.0	± .5
	T:	5.0	± .5
	Lead Diameter	0.5	± .1
	S:	5.1	± Nom
	L:	38.0	± Nom
	Coating Lead Run Down (straight Leads)	3.0	± Max
	B:	6.35	± .60
	C:	2.82	± .50

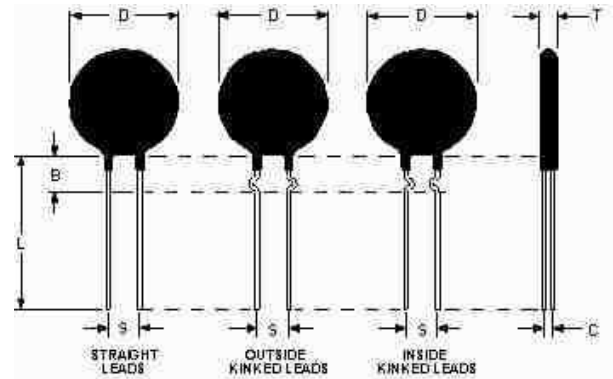

Electrical Specifications

	Resistance:	50.0 Ω	± 25 %
	Max Steady State Current upto 65°C:	1.10	A
	Max Rec. Energy Rating:	18	J
	Actual Failure Instantaneous Energy:	29	J
	Resistance @ 100% Max Current:	0.95	Ω
	Resistance @ 50% Max Current:	0.38	Ω
	Body Temperature at 100% Max Current:	125.00	°C
	Dissipation Constant:	11.2	mW/°C
	Thermal Time Constant:	38	Sec.
	Material Type (for Beta and Curve):	H	

SL10 50001	
Date: 02/14/2012	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: