




File: E209153



ISO9001:2008 Certified

**Mechanical Specifications (mm)**

	D:	16.0	± max
	T:	6.0	± max
	Lead Diameter	0.8	± nom
	S:	7.8	± nom
	L:	38.0	± nom
	Coating Lead Run Down (straight Leads)	3.0	± max
	B:	4.00	± nom
	C:	3.80	± nom

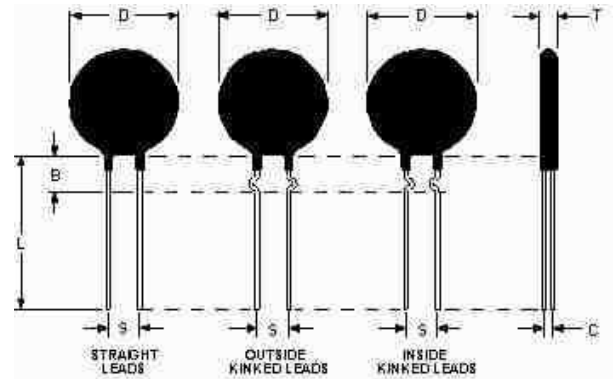

**Electrical Specifications**

	Resistance:	60.0 Ω	± 20 %
	Max Steady State Current upto 65°C:	4.00	A
	Max Rec. Energy Rating:	50	J
	Actual Failure Instantaneous Energy:		J
	Maximum Capacitance @ 120 VAC:	3,473	µf
	Maximum Capacitance @ 240 VAC:	868	µf
	Resistance @ 100% Max Current:	0.73	Ω
	Resistance @ 50% Max Current:	1.60	Ω
	Body Temperature at 100% Max Current:	194.00	°c
	Dissipation Constant:	15.0	mw/°c
	Thermal Time Constant:	45	Sec.
	Material Type (for Beta and Curve):	M	

<b>SL15 60004</b>	
Date: 11/11/2008	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: a