




File: E209153



ISO9001:2008 Certified

Mechanical Specifications (mm)

	D:	22.0	± max
	T:	5.0	± max
	Lead Diameter	1.0	± nom
	S:	7.5	± nom
	L:	38.0	± nom
	Coating Lead Run Down (straight Leads)	5.0	± max
	B:	9.35	± nom
	C:	3.77	± nom

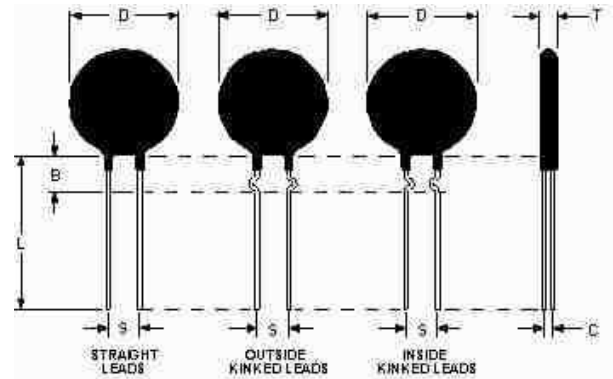

Electrical Specifications

	Resistance:	10.0 Ω	± 20 %
	Max Steady State Current upto 65°C:	7.00	A
	Max Rec. Energy Rating:	90	J
	Actual Failure Instantaneous Energy:	200	J
	Maximum Capacitance @ 120 VAC:	6,251	µf
	Maximum Capacitance @ 240 VAC:	1,562	µf
	Resistance @ 100% Max Current:	0.12	Ω
	Resistance @ 50% Max Current:	0.24	Ω
	Body Temperature at 100% Max Current:	172.00	°c
	Dissipation Constant:	32.4	mw/°c
	Thermal Time Constant:	122	Sec.
	Material Type (for Beta and Curve):	H	

SL22 10007	
Date: 11/11/2008	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: a