

DIMENSIONS IN INCHES (MILLIMETERS)
DO NOT SCALE DRAWING

Dwg. No. **CWR-171-XX-0021**

- NOTES:**
1. Dimensions are in inches; dimensions in () are in millimeters.
 2. Metric equivalents given for general information only, and are based upon 1.00 inches = (25.4) millimeters.
 3. Unless otherwise specified, tolerances are ±.005 (.13) for three place decimals, and ±.01 (.3) for two place decimals.

MATERIALS:

PLASTIC PARTS - UL94V-0 thermoplastic (blue, standard) flame retardant.

CONTACTS - Phosphor bronze.

CONTACT PLATING- .000030 Gold over .000050 Nickel, Std.


OPERATING STANDARDS:

TEMPERATURE RATING - 125° C

CONTACT RATING - 1 ampere.

DIELECTRIC STRENGTH - Over 500 V.D.C. at sea level.

CONDUCTORS ACCEPTED - 28-30 AWG solid or stranded.

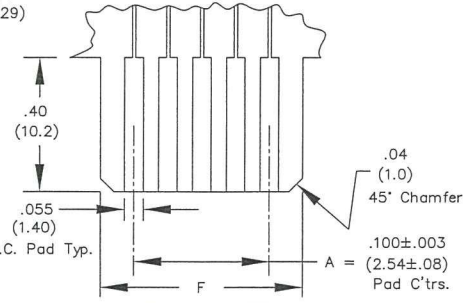

FORM-B4	REVISIONS	<p>ATTENTION</p> <p>THIS DRAWING AND ITS ATTACHMENTS, IF ANY, ARE PROPRIETARY TO CW INDUSTRIES AND DESCRIBE DESIGNS THAT ARE CONFIDENTIAL AND MUST NOT BE DISCLOSED UNLESS AUTHORIZED, IN WRITING, BY AN OFFICER OF CW INDUSTRIES.....</p>	<p>cw INDUSTRIES Southampton, Pa. 18966</p> <p>TOLERANCES UNLESS OTHERWISE SPECIFIED</p> <p>2 Place Decimal ±.010 METRIC</p> <p>3 Place Decimal ±.005 1 Place Dec. ±.25mm</p> <p>Angles ±1' 2 Place Dec. ±.13mm</p>	<p>Title: CARD EDGE CONNECTOR FOR .050 ctrs. rnd. cond. cable</p> <p>Division: CONNECTOR</p> <p>Dwg. No. CWR-171-XX-0021</p>	
	<p>3-02-12</p> <p>DGW MAR 5 2012</p>				<p>Released for: CW IND.</p> <p>Drawn by: DGW 3-02-12</p> <p>Checked by: G. GULD 3-5-12</p> <p>Approval: G. GULD 3-5-12</p>
	<p>1</p> <p>2</p> <p>3</p> <p>4</p> <p>5</p> <p>6</p> <p>7</p>				<p>8</p> <p>9</p> <p>10</p>
	<p>PDF File Made</p>				<p>PDF File Made</p>

MASTER