


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

| | | | |
|-----------------------|-----------------------|--|--------------------------------|
| Rating | 6A 14V DC | | <p>SPST ON - OFF (LED)</p> |
| Contact Resistance | 50m ohm max. | | |
| Insulation Resistance | DC 500V 100M ohm min. | | |
| Dielectric Strength | AC 1500V 1 minute | | |
| Operating Temperature | -0° C ~ 55° C | | |

Cut-Out 0.7 ~ 3.0 mm thk.

BASE COLOR: Black
 BUTTON COLOR: Red, PC Clear
 LED: Red

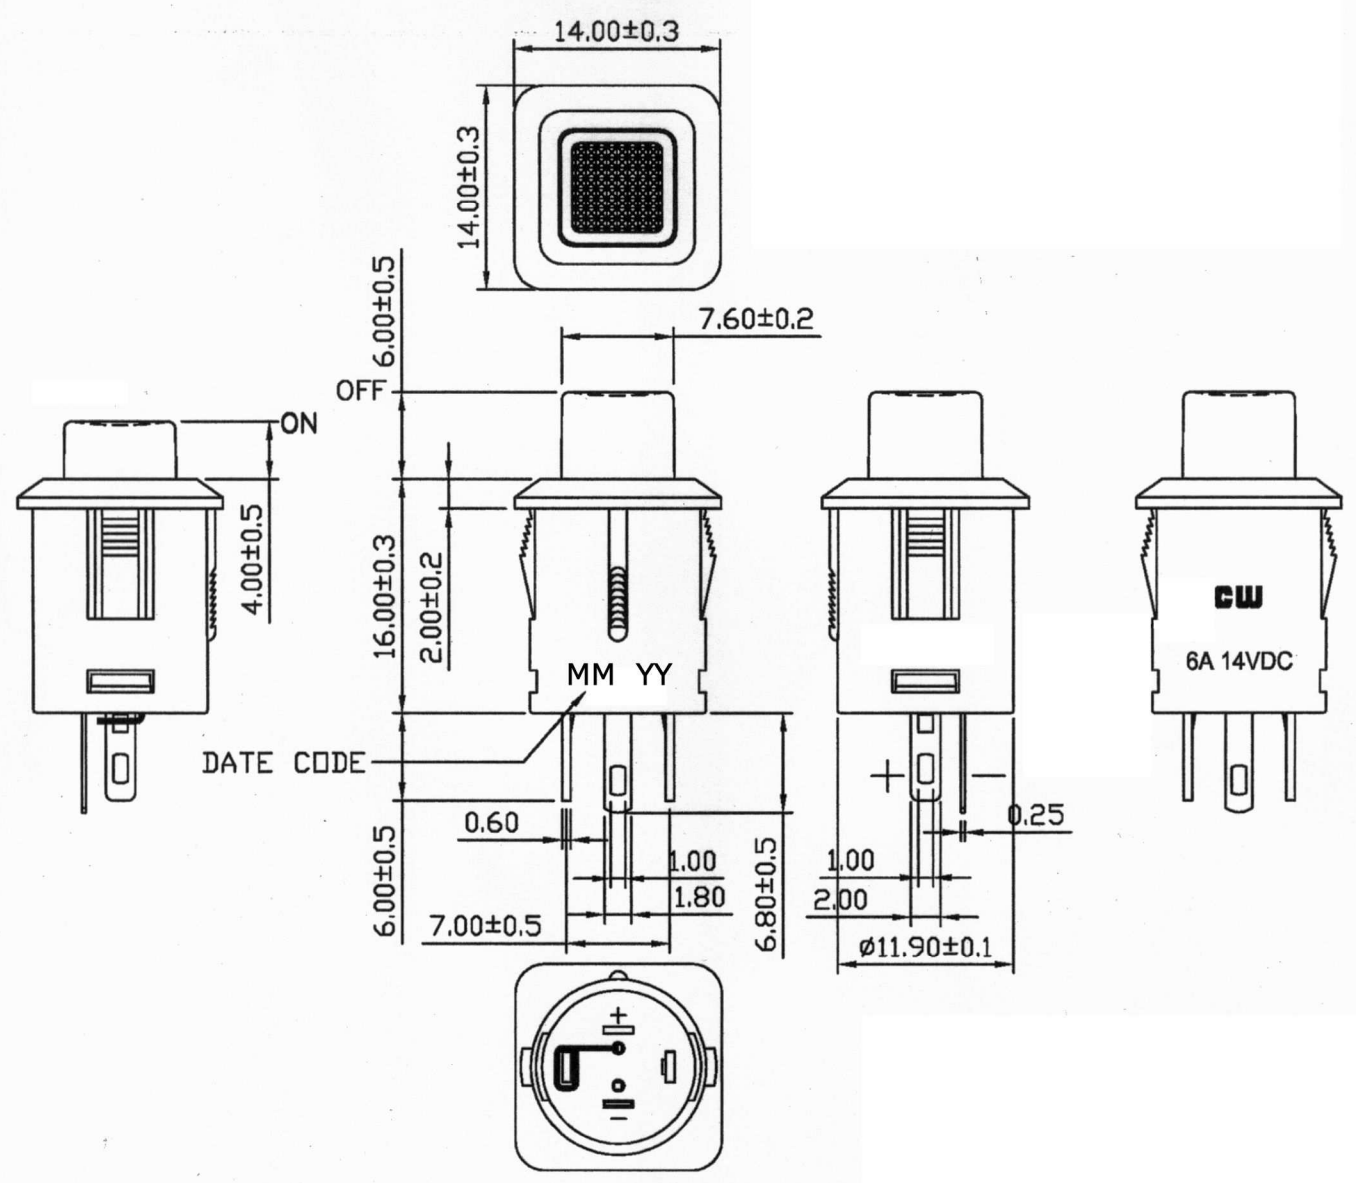

RoHS Compliant

| | | | | |
|--|---------------------------|--------|----------------------|---------------------|
| <p>Southampton, Pa. 18966 Tel 215.355.7080/www.cwind.com</p> | Date Drawn: 12/24/09 | Rev. 0 | Unit: mm | Checked By: G. Guld |
| | Title: PUSH BUTTON SWITCH | | CW P/N: GPB554DL05BR | |