


Radial Leaded Inductors

LHL10TB823J

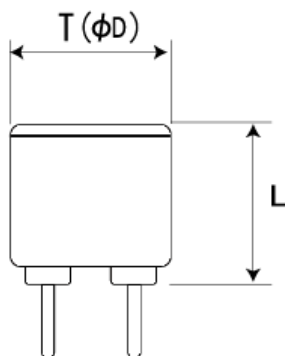

■ Features

- Item Summary
82000 μ H(\pm 5%), 0.033A, 30min, Leaded
- Lifecycle Stage
Mass Production
- Standard packaging quantity (minimum)
Taping 500pcs

■ Products characteristics table

External Dimensions (mm) LxD	14(max) \times 11(max) ☒
Inductance	82000 μ H(\pm 5%)
Inductance Measuring Frequency	1kHz
DC Resistance (max)	210 Ω
Q (min)	30min
Temperature Range	-25 $^{\circ}$ C to 105 $^{\circ}$ C
Self-resonant Frequency (min)	0.088MHz
RoHS Compliance	Yes
Soldering Method	Wave

■ External Dimensions

L	14mm max
D	11mm max

2014.03.05

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.
 Before making final selection, please check product specification.