


Radial Leaded Inductors

LHL16TB103J

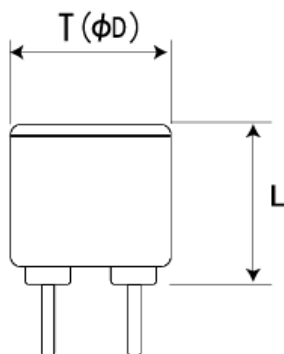

■ Features

- Item Summary
10000 μ H(\pm 5%), 0.25A, 70min, Leaded
- Lifecycle Stage
Non-preferred
- Standard packaging quantity (minimum)
Taping 250pcs

■ Products characteristics table

| | |
|--------------------------------|----------------------------|
| External Dimensions (mm) LxD | 21(max) \times 17(max) ☒ |
| Inductance | 10000 μ H(\pm 5%) |
| Inductance Measuring Frequency | 1kHz |
| DC Resistance (max) | 7.3 Ω |
| Q (min) | 70min |
| Temperature Range | -25°C to 105°C |
| Self-resonant Frequency (min) | 0.26MHz |
| RoHS Compliance | Yes |
| Soldering Method | Wave |

■ External Dimensions

| | |
|---|----------|
| L | 21mm max |
| D | 17mm max |

2014.03.05

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.
 Before making final selection, please check product specification.