

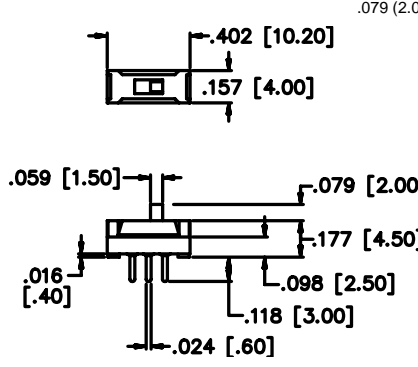



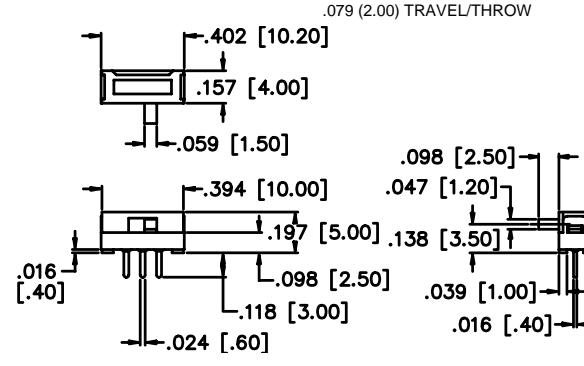



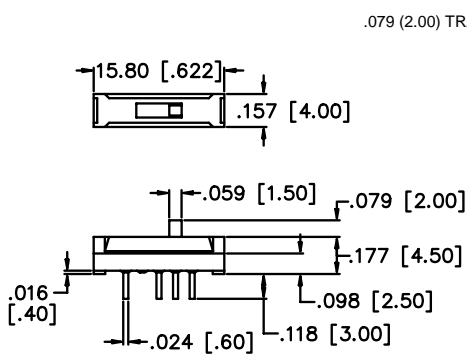
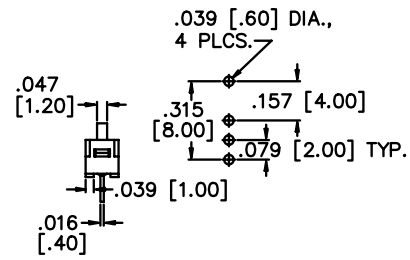


MJS Series

Microminiature Slide Switches

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

SPECIFICATIONS	FEATURES
<p>Contact rating: 100 mA at 12 VDC</p> <p>Initial contact resistance: 20 milliohms max.</p> <p>Insulation resistance: 100 megohms min. at 500 VDC</p> <p>Dielectric strength: 500 volts RMS at sea level</p> <p>Electrical life: 10,000 cycles min.</p> <p>Operating temperature range: -10°C to +60°C</p> <p>Actuation force: 225g (average)</p> <p>Solder heat resistance: 260°C max. for 5 seconds</p> <p>Washing not recommended</p>	<ul style="list-style-type: none"> Molded-in terminals minimize flux or solder entry. Molded-in high temperature phenolic base. Low Profile. Bifurcated wiping contact design.
MATERIALS	
	<p>Contacts & terminals: Silver plated</p> <p>Case & actuator: Thermoplastic</p> <p>Terminal seal: Molded-in</p>

MODEL NO.	1P2T		
MJS12			
	 <p>● = COMMON</p>		
VERTICAL ACTUATOR	SCHEMATIC	MECHANICAL OUTLINE	P.C. BOARD LAYOUT
MODEL NO.	1P2T		
MJS12R			
	 <p>● = COMMON</p>		
RIGHT ANGLE ACTUATOR	SCHEMATIC	MECHANICAL OUTLINE	P.C. BOARD LAYOUT
MODEL NO.	1P3T		
MJS13			
	 <p>● = COMMON</p>		
VERTICAL ACTUATOR	SCHEMATIC	MECHANICAL OUTLINE	P.C. BOARD LAYOUT

MJS Series

Microminiature Slide Switches

MODEL NO. MJS13R	<p style="text-align: right;">.079 (2.00) TRAVEL/THROW</p> <p>1P3T</p> <p>SCHEMATIC</p> <p>● = COMMON</p> <p>MECHANICAL OUTLINE</p> <p>P.C. BOARD LAYOUT</p> <p>RIGHT ANGLE ACTUATOR</p>
MODEL NO. MJS22	<p style="text-align: right;">.079 (2.00) TRAVEL/THROW</p> <p>2P2T</p> <p>SCHEMATIC</p> <p>● = COMMON</p> <p>MECHANICAL OUTLINE</p> <p>P.C. BOARD LAYOUT</p> <p>VERTICAL ACTUATOR</p>
MODEL NO. MJS22R	<p style="text-align: right;">.079 (2.00) TRAVEL/THROW</p> <p>2P2T</p> <p>SCHEMATIC</p> <p>● = COMMON</p> <p>MECHANICAL OUTLINE</p> <p>P.C. BOARD LAYOUT</p> <p>RIGHT ANGLE ACTUATOR</p>

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE