




EA-23003-000
SHT 1.1

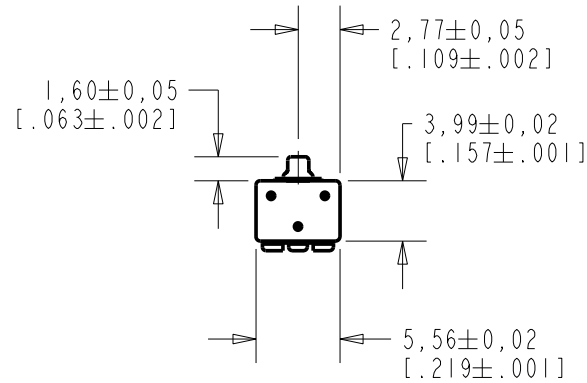

NOTE:

1. INCREASED PRESSURE AT THE SOUND INLET CAUSES A POSITIVE GOING VOLTAGE TO APPEAR AT THE OUTPUT TERMINAL, RELATIVE TO THE NEGATIVE TERMINAL.

2 LOCATED FROM TWO SURFACES FOR CUSTOMER CONVENIENCE. ONLY APPLICABLE FROM ONE SURFACE, NOT TO BE USED TOGETHER. HORIZONTAL LOCATION FOR TERMINAL CENTERED TO $\pm 0,17$ [.007].

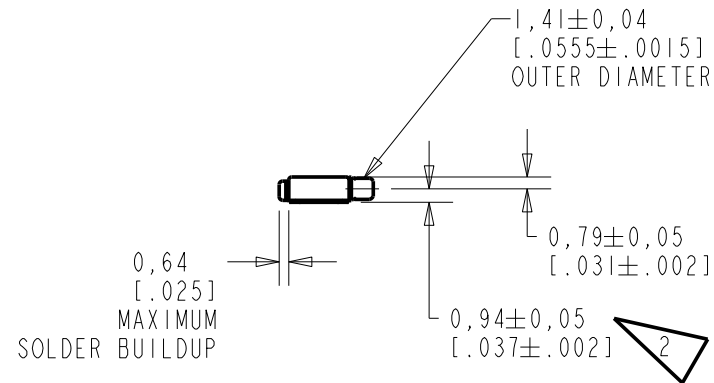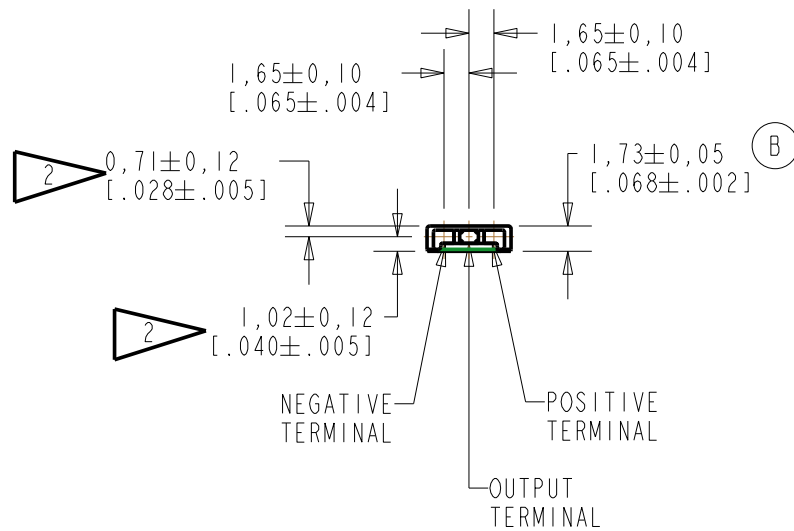


NOMINAL WEIGHT .13 GRAM DIMENSIONS IN MILLIMETERS [INCHES]


Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
B	MI0102407	12-18-08	Active	B
A	MI0101557	8-14-07		

SCALE: 2:1	DR. BY: CRG	DATE: 8-14-07
DO NOT SCALE DRAWING	CK. BY: GJP	DATE: 8-16-07
TITLE: MICROPHONE	APP. BY: GJP	DATE: 8-16-07
EA-23003-000	SHT 1.1	
OUTLINE DRAWING	KE111ASIZE.FRM Rev: B	

KNOWLES ELECTRONICS
 ITASCA, ILLINOIS U.S.A.

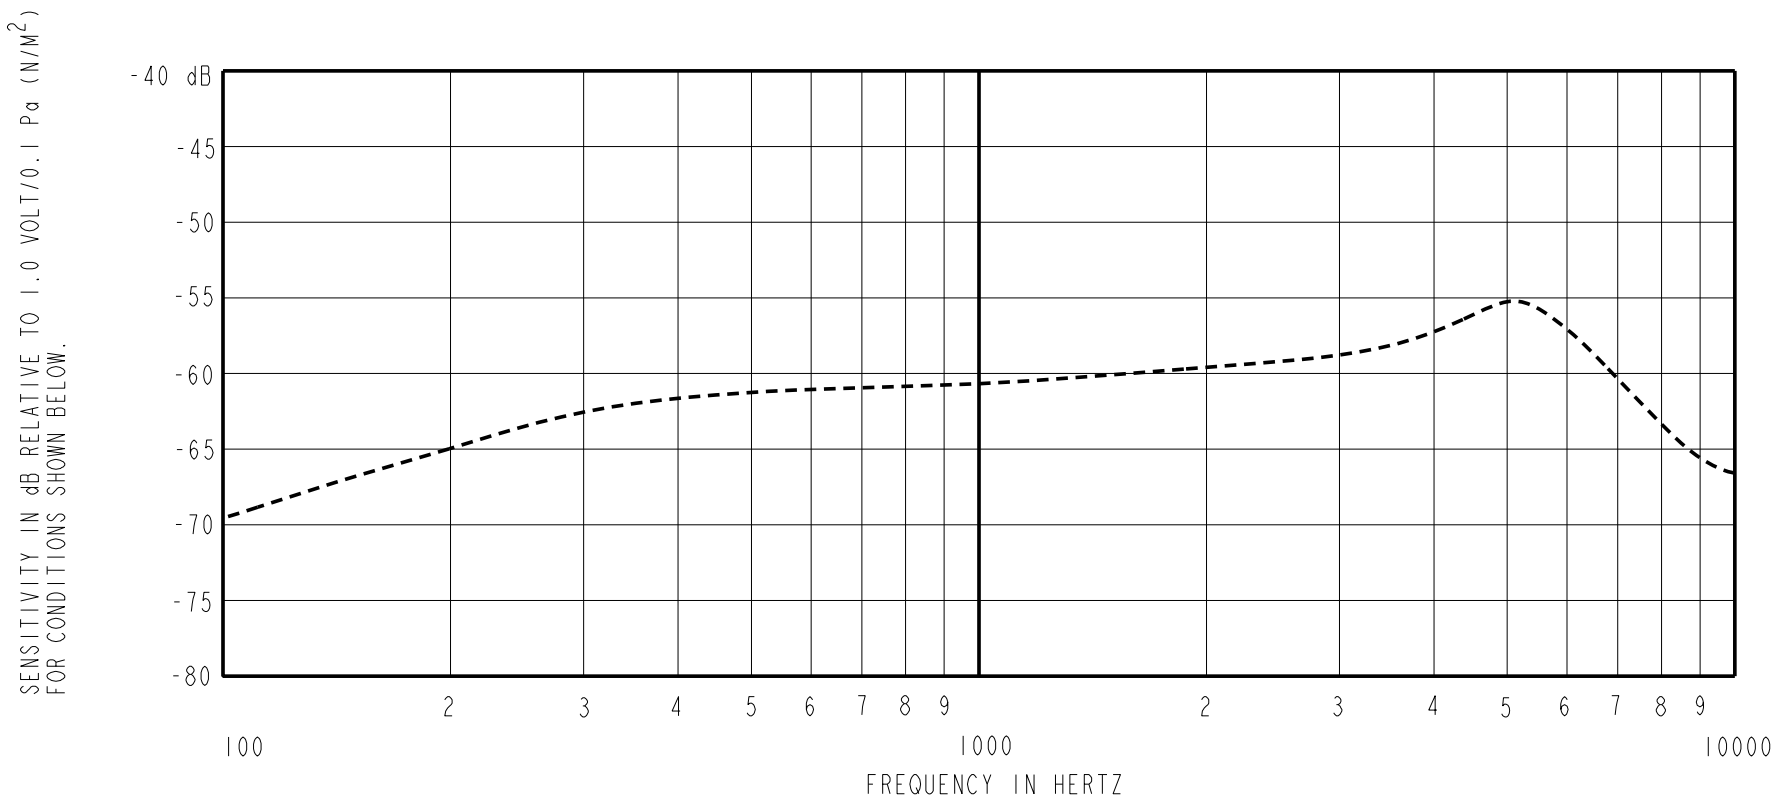

FREQUENCY	SENSITIVITY			DEVICE CONFORMITY	
	MIN.	NOM.	MAX.	RANGE OF DEVIATION FROM 1KHz	
100	---	-69.5	---	-12.5	-5.5
1000	-64.0	-61.0	-58.0	0.0	0.0
≈ 5200	---	-55.5	---	+2.5	+8.5

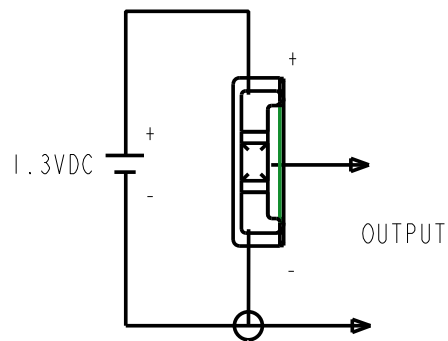

NOTES:

1. CASE CONNECTED TO NEGATIVE TERMINAL.
2. MICROPHONE TO BE FUNCTIONAL WITH 10 VDC SUPPLY.

PORT LOCATION	DC SUPPLY	AMPLIFIER CURRENT DRAIN	SENSITIVITY CHANGE ON REDUCING SUPPLY TO 0.9VDC	"A" WEIGHTED NOISE (1 kHz EQUIV. SPL)	OUTPUT IMPEDANCE OHMS			CAPACITANCE ±50%	
					MIN.	NOM.	MAX.	1-2	1-3
12S	1.3V	50 uA MAX.	3 dB MAX.	30.5 dB MAX.	2000	3800	6000	NA	NA

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
B	M10102407	12-18-08	Active	B
A	M10101557	8-14-07		

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.

WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION

TITLE: **MICROPHONE** **EA-23003-000**
PERFORMANCE SPECIFICATION **SHT 2.1**

DR. BY	DATE
CRG	8-14-07
CK. BY	DATE
GJP	8-16-07
APP. BY	DATE
GJP	8-16-07