


CU16025-TW200A

SIMPLIFIED DATASHEET

■ Features

16 character x 2 line display character module.
Built-in ASCII, katakana, and International fonts.

■ Outer dimension

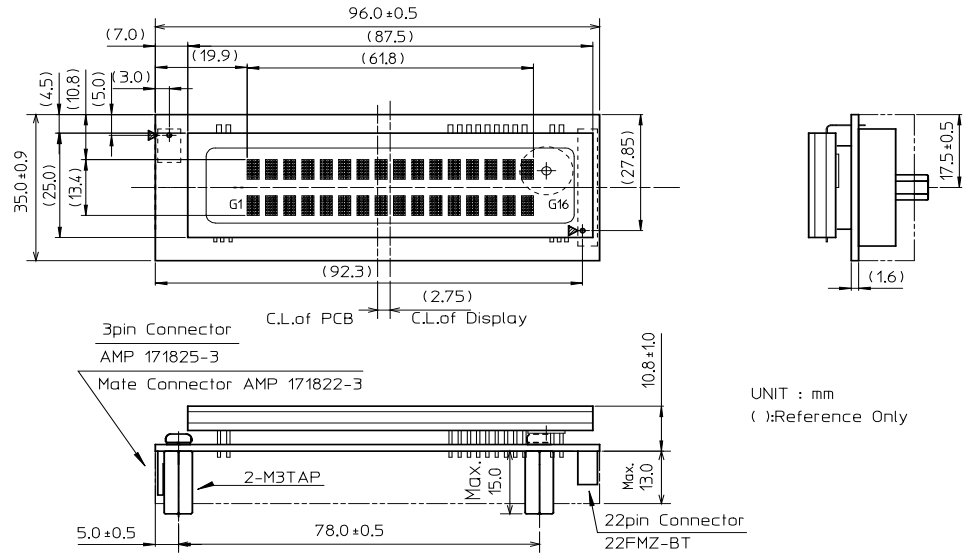

UNIT : mm
():Reference Only

Get full specification



Click here to go to request form.

Specifications

■ Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power supply voltage	VCC	4.75	5.00	5.25	VDC	-

■ Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Input Voltage (D7-D0, WR, CS)						
H	VIH	2.0	-	VCC	VDC	Vcc=5.0V
L	VIL	0	-	0.8	VDC	TA=25°C
(RESET)						
H	VIH	3.5	-	-	VDC	
L	VIL	-	-	1.5	VDC	
Output Voltage						
H	VOH	2.4	-	-		IOH=-8mA
L	VOL	-	-	0.5		IOL=8mA
Power Supply Current	Icc	-	130	170	mADC	All dots ON

■ Optical Characteristics

Parameter	
Luminance	350 cd/m ² Min.
Color of illumination	Green (Blue-Green)

■ Environmental Conditions

Parameter	
Operating Temperature	-40 ~ +85 degrees celsius
Storage Temperature	-40 ~ +85 degrees celsius
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (Non operation)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (non-operating)	980m/s ² (100G) 9ms X-Y-Z, 3 times each direction

■ Physical Specifications

Parameter	
Number of Char.	32 (16 characters x 2 lines)
Built-in Fonts	ANK, International Font
Character Format	5 x 7 dot matrix
Display Area	61.8 x 13.4 mm (X x Y)
Character Size	2.55 x 4.7 mm (X x Y)
Character Pitch	3.95 mm
Line Pitch	8.7 mm

■ Interface

Parallel, Asynchronous Serial (TTL)

■ Pin Assignment (Parallel / Serial)

Pin No	Signal	Pin No	Signal
1	D7	2	D6
3	D5	4	D4
5	D3	6	D2
7	D1	8	D0
9	WR	10	CS
11	SN/TO	12	BUSY
13	GND	14	GND
15	VCC	16	VCC
17	VCC	18	GND
19	GND	20	GND
21	GND	22	RESET

(Serial)

Pin No	Signal	Baud Rate Setting
1	VCC	19200bps*
2	SN/TO	9600bps
3	GND	4800bps
		2400bps
		1200bps
		600bps

(*:factory default)

■ Functions

Parameter
Auto initialized
Command Control
Blink speed control
Flicker less Mode / Quick Write Mode
etc.