


CU200211-TE200A

SIMPLIFIED DATASHEET

■ Features

20 character x 2 line character module.
 High-brightness display with built-in 5x8 dot font.
 Good for applications that mainly display characters, but don't need Asian font display.

■ Outer dimension

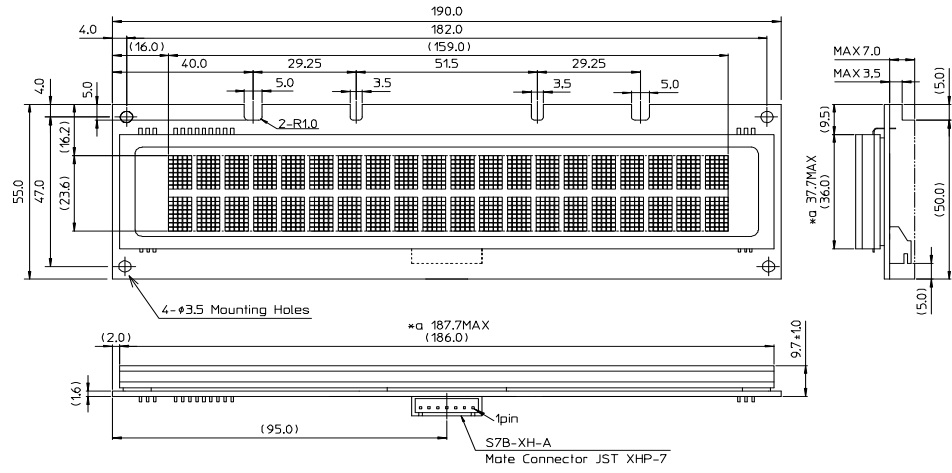

() REFERENCE ONLY
 Unit : mm
 Tolerance is 0.5mm unless stated otherwise.
 *a Including extra frit glass

Get full specification



Click here to go to request form.

Specifications

■ Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power supply voltage	VCC	4.75	5.00	5.25	VDC	-

■ Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Input Voltage (RXD,DSR)						
H	VIH1	3	-	15	VDC	-
L	VIL1	-15	-	-3	VDC	-
Output Voltage (TXD,DTR)						
H	VOH1	5	-	-	VDC	RL=3kΩ
L	VOL1	-	-	-5	VDC	
Signal Input Impedance (RXD,DSR)	RIN	3	-	7	kΩ	-
Input Voltage (TEST)						
H	VIH2	2.64	-	3.3	VDC	-
L	VIL2	0	-	0.66	VDC	-
Power Supply Current						
	Icc1	-	920	1150	mADC	All dots ON
	Icc2	-	620	780	mADC	All dots OFF
	Icc3	-	21	30	mADC	Disp. Power OFF

■ Optical Characteristics

Parameter	
Luminance	1000 cd/m ² Min. (2000 cd/m ² Typ.)
Color of illumination	Green (Blue-Green)

■ Environmental Conditions

Parameter	
Operating Temperature	-40 ~ +85 degrees celsius
Storage Temperature	-40 ~ +85 degrees celsius
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Storage Humidity	20~ 80% R.H. (non-condensing)
Vibration (Non operation)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (non-operating)	392m/s ² (40G) 9ms X-Y-Z, 3 times each direction

■ Physical Specifications

Parameter	
Number of Char.	40 (20 characters x 2 lines)
Built-in Fonts	ANK, International Font
Character Format	5 x 8 dot matrix
Display Area	159.0 x 23.59 mm (X x Y)
Character Size	6.52 x 10.51 mm (X x Y)
Character Pitch	8.03 x 13.07 mm (X x Y)
Weight	About 118 g

■ Interface

Asynchronous Serial (RS232)

■ Pin Assignment

Pin No	Signal	Baud Rate Setting
1	RXD	9600bps
2	DTR	19200bps
3	DSR	38400bps*
4	TXD	115200bps
5	TEST	(*:factory default)
6	VCC	
7	GND	

■ Functions

Parameter	
2-byte Character	
Command Control	
FROM User Font Control	
FROM User Table Control	
International Font	
etc.	



Leaflet contents, and specifications and external appearance of products, may change without notice.

Please confirm product details in the specification.

(C)Copyright NORITAKE ITRON CORP.