


CU20025-TW200A

SIMPLIFIED DATASHEET

Features

20 character x 2 line display character module.
Compact size. Built-in ASCII, katakana, and International fonts.

Outer dimension

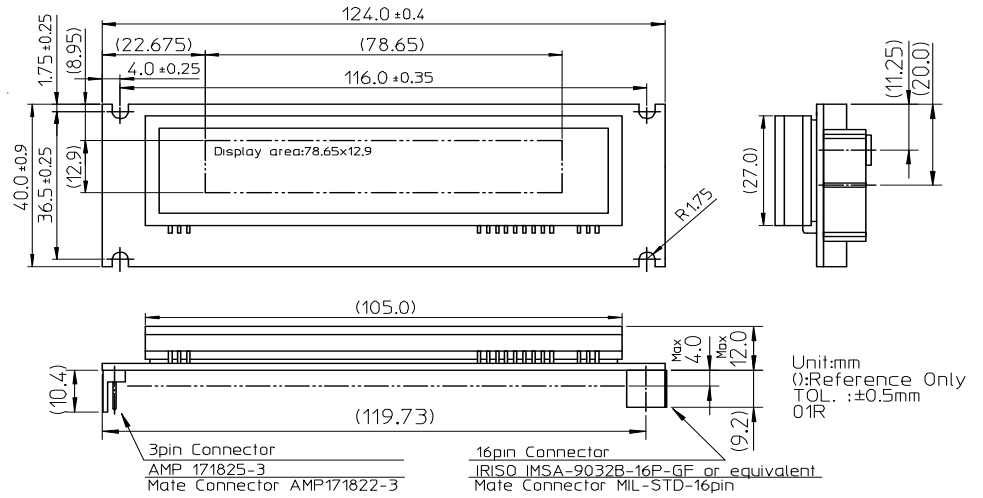

Get full specification



Click here to go to request form.

Specifications

Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power supply voltage	VCC	4.75	5.00	5.25	VDC	-

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Input Voltage						
H	VIH	0.8VCC	-	VCC	VDC	
L	VIL	0	-	0.3VCC	VDC	IOL=5mA
Output Voltage						
H	VOH	VCC-1.5	-	-		IOH=-5mA
L	VOL	-	-	1.5		IOL=5mA
Power Supply Current	Icc	-	280	340	mADC	All dots ON

Optical Characteristics

Parameter	Value
Luminance	350 cd/m ² Min.
Color of illumination	Green (Blue-Green)

Environmental Conditions

Parameter	Value
Operating Temperature	-40 ~ +85 degrees celsius
Storage Temperature	-40 ~ +85 degrees celsius
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (Non operation)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (non-operating)	980m/s ² (100G) 9ms X-Y-Z, 3 times each direction

Physical Specifications

Parameter	Value
Number of Char.	40 (20 characters x 2 lines)
Built-in Fonts	ANK, International Font, KATAKANA font by jumper switch
Character Format	5 x 7 dot matrix & Under line
Display Area	78.65 x 12.90 mm (X x Y)
Character Size	2.65 x 5.7 mm (X x Y)
Character Pitch	4.00 mm
Line Pitch	7.2 mm

Interface

Parallel, Asynchronous Serial (CMOS)

Pin Assignment (Parallel / Serial)

Pin No	Signal	Pin No	Signal
1	D7	2	D6
3	D5	4	D4
5	D3	6	D2
7	D1	8	D0
9	WR	10	CS
11	SN/TO	12	BUSY
13	GND	14	GND
15	VCC	16	VCC

(Serial)

Pin No	Signal	Baud Rate Setting
1	VCC	19200bps*
2	SN/TO	9600bps
3	GND	4800bps
		2400bps
		1200bps
		600bps
		(*:factory default)

Functions

Parameter	Value
Auto initialized	
Command Control	
Blink speed control	
Flicker less Mode / Quick Write Mode	
etc.	



Leaflet contents, and specifications and external appearance of products, may change without notice.

Please confirm product details in the specification.

(C)Copyright NORITAKE ITRON CORP.