


CU200211-Y100

SIMPLIFIED DATASHEET

Features

20 character x 2 line display.
Largest character size display in the series.

Physical dimension

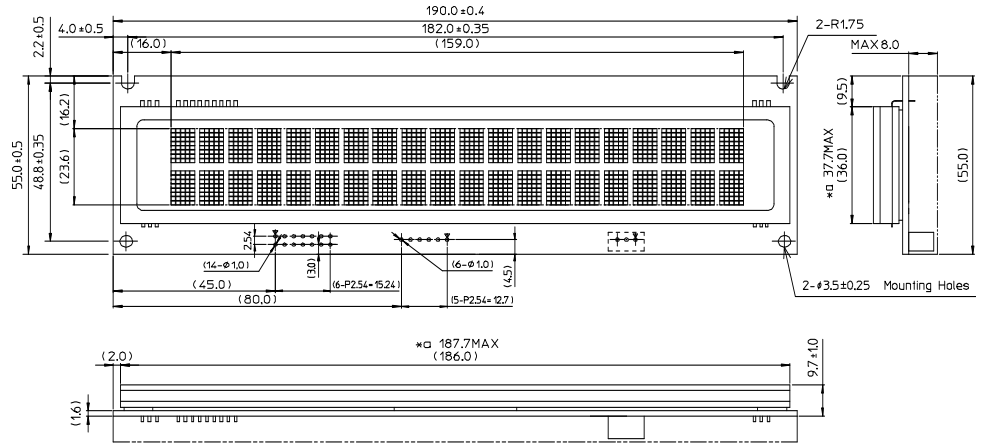

() Reference only
Unit:mm
*a including extra frit glass

Get full specification



Click here to go to request form.

Specifications

Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power supply Voltage	VCC	4.75	5.00	5.25	VDC	-

Electrical Characteristics

#1: Brightness 200% #2: Brightness 100%

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
'L' Logic Input Current D0-D7, /WR, /RESET	IIL	-	-	-0.15	mA	VIN=0V
'H' Logic Input Current D0-D7 /WR, /RESET	IIH1 IIH2	-	-	5.0 0.25	μA μA	VIN=5V VIN=5V
Logic input resistance SIN	RIN	3	-	-	KOhm	-
'L' Logic Input Voltage D0-D7, /WR /RESET SIN	VIL1 VIL2 VIL3	0 0 -15	- - -	0.2VCC 0.8 0.5	VDC VDC VDC	- - -
'H' Logic Input Voltage D0-D7, /WR, /RESET SIN	VIH1 VIH2	0.8VCC 3.0	- -	VCC +15	VDC VDC	- -
'L' Logic Output Voltage PBUSY SBUSY	VOL1 VOL2	- 0	- -	0.1 0.5	VDC VDC	IOL=50 μA RL=3KOhm
'H' Logic Output Voltage PBUSY SBUSY	VOH1 VOH2	VCC-0.1 4.0	- -	- VCC	VDC VDC	IOH=-50 μA RL=3KOhm
Power Supply Current #1	ICC1-1	-	720	920	mADC	Display ON
Power Supply Current #1	ICC2-1	-	560	720	mADC	Display OFF
Power Supply Current #2	ICC1-2	-	980	1260	mADC	Display ON
Power Supply Current #2	ICC2-2	-	640	820	mADC	Display OFF
Power Supply Current #3	ICC3	-	18	30	mADC	Disp. Pwr OFF
Power Consumption #1		-	3.6	4.6	W	Display ON
Power Consumption #2		-	5.0	6.4	W	Display ON

Optical Characteristics

#1: Brightness 200% #2: Brightness 100%

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminance		350 cd/m ² Min.				
	#1	1000 cd/m ² Typ.				
	#2	2000 cd/m ² Typ.				
Color of illumination		Green (Blue-Green)				

Environmental Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Operating Temperature		-40		+85	degrees celsius	
Storage Temperature		-40		+85	degrees celsius	
Operating Humidity		20		80	% R.H. (non-condensing)	
Storage Humidity		20		80	% R.H. (non-condensing)	
Vibration (Non operation)		10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z				
Shock (Non operation)		392m/s ² (40G) 9ms X-Y-Z, 3 times each direction				

Physical Specifications

Parameter	Value
Number of Char.	40 (20 characters x 2 lines)
Built-in Fonts	5 x 8 ANK, International font
Display Area	159.0 x 23.59 mm (X x Y)
Character Size	6.52 x 10.51 mm (X x Y)
Character Pitch	8.03 mm
Line pitch	13.08 mm
Weight	About 119 g

Interface

Parallel (CMOS), Asynchronous Serial (RS232)

Pin Assignment (Parallel)

Pin No	Signal	Pin No	Signal
1	GND	2	Vcc
3	PBUSY	4	/RESET
5	/WR	6	NC
7	D0(LSB)	8	D1
9	D2	10	D3
11	D4	12	D5
13	D6	14	D7(MSB)

(Serial)

Pin No	Signal	Baud Rate Setting
1	Vcc	9600bps
2	SIN	19200bps
3	GND	38400bps*
4	SBUSY	115200bps
5	NC	(*:factory default)
6	/RESET	

Functions

Parameter	Value
Highlight Function	
Font Magnification	
Horizontal scroll mode	
Blink ON/OFF	
Power save mode	
Screen saver	
Cursor, Underline ON/OFF	
User Font function	
etc.	

