


# CU20027-Y100

## SIMPLIFIED DATASHEET

### ■ Features

20 character x 2 line display.  
Compact, with large character display.

### ■ Physical dimension

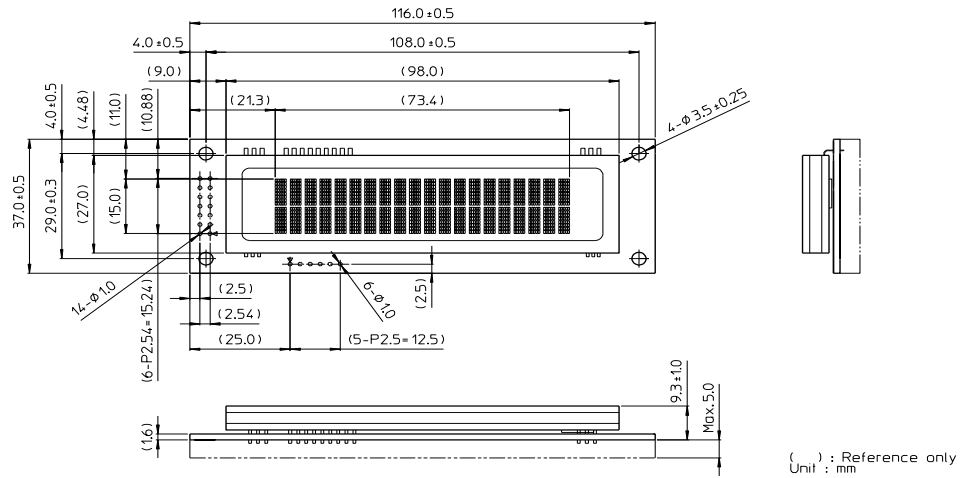

### Get full specification



Click here to go to request form.

### Specifications

#### ■ Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power supply Voltage	VCC	4.75	5.00	5.25	VDC	-

#### ■ Electrical Characteristics

#1: Brightness 200% #2: Brightness 100%

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
'L' Logic Input Current D0-D7, /WR, /RESET	IIL	-	-	-0.15	mA	VIN=0V
'H' Logic Input Current D0-D7 /WR, /RESET	IIH1	-	-	5.0	μA	VIN=5V
	IIH2	-	-	0.25	μA	VIN=5V
Logic input resistance SIN	RIN	3	-	-	KOhm	-
'L' Logic Input Voltage D0-D7, /WR /RESET	VIL1	0	-	0.2VCC	VDC	-
	VIL2	0	-	0.8	VDC	-
	VIL3	-15	-	0.5	VDC	-
'H' Logic Input Voltage D0-D7, /WR, /RESET SIN	VIH1	0.8VCC	-	VCC	VDC	-
	VIH2	3.0	-	+15	VDC	-
'L' Logic Output Voltage PBUSY	VOL1	-	-	0.1	VDC	IOL=50 μA
SBUSY	VOL2	0	-	0.5	VDC	RL= 3KOhm
'H' Logic Output Voltage PBUSY	VOH1	VCC-0.1	-	-	VDC	IOH=-50 μA
SBUSY	VOH2	4.0	-	VCC	VDC	RL= 3KOhm
Power Supply Current #1	ICC1-1	-	240	300	mADC	Display ON
Power Supply Current #1	ICC2-1	-	200	250	mADC	Display OFF
Power Supply Current #2	ICC1-2	-	320	400	mADC	Display ON
Power Supply Current #2	ICC2-2	-	250	310	mADC	Display OFF
Power Supply Current 3	ICC3	-	25	35	mADC	Disp. Pwer OFF
Power Consumption #1	-	-	1.2	1.5	W	Display ON
Power Consumption #2	-	-	1.6	2.0	W	Display ON

#### ■ Optical Characteristics

#1: Brightness 200% #2: Brightness 100%

Parameter	Value
Luminance	350 cd/m <sup>2</sup> Min.
	#1 1000 cd/m <sup>2</sup> Typ.
	#2 2000 cd/m <sup>2</sup> Typ.
Color of illumination	Green (Blue-Green)

#### ■ Environmental Conditions

Parameter	Value
Operating Temperature	-40 ~ +85 degrees celsius
Storage Temperature	-40 ~ +85 degrees celsius
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Storage Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (Non operation)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (Non operation)	392m/s <sup>2</sup> (40G) 9ms X-Y-Z, 3 times each direction

#### ■ Physical Specifications

Parameter	Value
Number of Char.	40 (20 characters × 2 lines)
Built-in Fonts	5 x 8 ANK, International font
Display Area	73.4 x 14.97 mm (X x Y)
Character Size	2.72 x 7.19 mm (X x Y)
Character Pitch	3.72 mm
Line pitch	7.81 mm
Weight	About 48 g

#### ■ Interface

Parallel (CMOS), Asynchronous Serial (RS232)

#### ■ Pin Assignment (Parallel)

Pin No	Signal	Pin No	Signal
1	GND	2	Vcc
3	PBUSY	4	/RESET
5	/WR	6	NC
7	D0(LSB)	8	D1
9	D2	10	D3
11	D4	12	D5
13	D6	14	D7(MSB)

#### (Serial)

Pin No	Signal	Baud Rate Setting
1	Vcc	9600bps
2	SIN	19200bps
3	GND	38400bps*
4	SBUSY	115200bps
5	NC	(*:factory default)
6	/RESET	

#### ■ Functions

Parameter	Value
Highlight Function	
Font Magnification	
Horizontal scroll mode	
Blink ON/OFF	
Power save mode	
Screen saver	
Cursor, Underline ON/OFF	
User Font function	
etc.	