


GU160X80E-7900B

SIMPLIFIED DATASHEET

Features

160x80 dots high-density type. Same PCB size as current 128x64 dot models.
Use instead of GU128X64-8xxx or GU128x64F-7xxx, to increase display function without changing case size.

Physical dimension

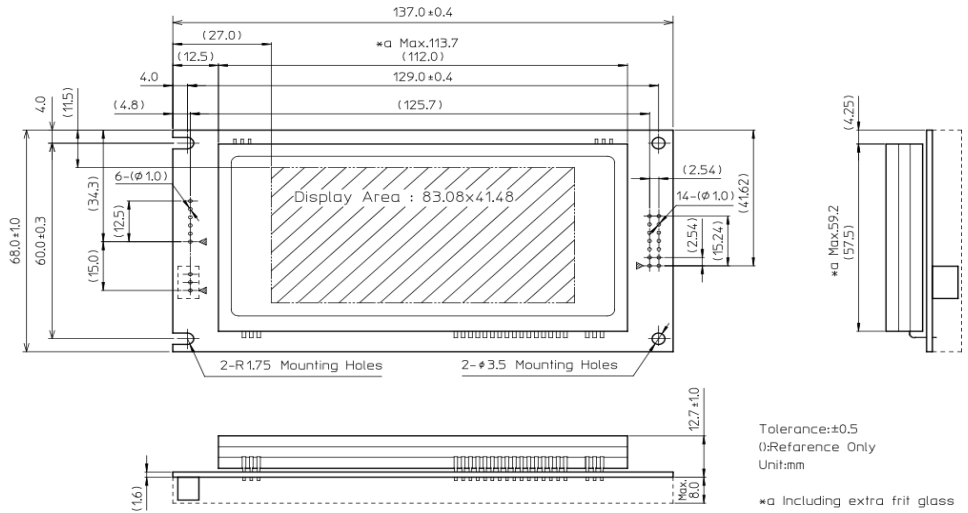

Get full specification



Click here to go to request form.

Specifications

Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power supply voltage	VCC	4.75	5.00	5.25	VDC	-

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
'L' Logic Input Current D0-D7 /WR/RD /RESET	IIL1 IIL2	-	-	-0.15 -0.6	mA	VIN=0V
'H' Logic Input Current D0-D7 /WR/RD/RESET	IIH	-	-	1.0	μ ADC	VIN=5V
Logic Input Voltage D0-D7 /WR/RD/RESET	VIH VIL	0.8VCC 0	-	VCC 0.2VCC	VDC	-
Logic Output Voltage D7(Busy flag), PBUSY	VOH VOL	3.8 0	-	VCC 0.6	VDC	IOH=-1.5mA IOL=1.6mA
Logic input resistance SIN	RIN	3	-	-	K Ω	-
Logic Input Voltage SIN	VIH VIL	3.0 -15	-	+15 0.5	VDC	-
Logic Output Voltage SBUSY	VOH VOL	4.0 0	-	VCC 0.5	VDC	RL=3K Ω RL=3K Ω
Power Supply Current 1	ICC-1	-	800	1040	mADC	All dots ON
Power Supply Current 2	ICC-2	-	620	810	mADC	All dots OFF
Power Supply Current 3	ICC-3	-	30	50	mADC	Display power OFF
Power Consumption	-	-	4.0	5.2	W	All dots ON

Optical Specifications

Parameter	Value
Luminance	350 cd/m ² Min. (900 cd/m ² Typ.)
Color of illumination	Green (Blue-Green)

Environmental Specifications

Parameter	Value
Operating Temperature	-40 ~ +85 degrees celsius
Storage Temperature	-40 ~ +85 degrees celsius
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Storage Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (non-operating)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (non-operating)	392m/s ² (40G) 9ms X-Y-Z, 3 times each direction

Physical Specifications

Parameter	Value
Number of Dots	12,800 (160 x 80)
Display Area	80.08 mm x 41.48 mm
Dot Size (X x Y)	0.40 mm x 0.40 mm
Dot Pitch (X x Y)	0.52 mm x 0.52 mm
Weight	About 147 g

Interface

Parallel(CMOS), Asynchronous Serial (RS232)

Pin Assignment (Parallel)

Pin No.	Signal	Pin No.	Signal
1	GND	2	VCC
3	NC	4	RS
5	/WR	6	/RD
7	D0	8	D1
9	D2	10	D3
11	D4	12	D5
13	D6	14	D7(PBUSY)

(Asynchronous Serial)

Pin No.	Signal	Baud Rate Setting
1	VCC	9600bps
2	SIN	19200bps
3	GND	38400bps*
4	SBUSY	115200bps
5	NC	(*:Default setting)
6	/RESET	
7	NC	

Selectable Font

Parameter	Value
Character font type	5 x 7 ANK, International 8 x 16 ANK, International 16 x 16 2-byte character
Character width	Fixed/Proportional character format 1&2
Character numbers	22 x 10 by 5 x 7 dot ASCII 26 x 10 by 5 x 7 dot Proportional 10 x 5 16 x 16 dot 2-byte character

Functions

Parameter	Value
Control command	
Scroll display action	
Proportional Font function	
User-Windows function	
AND/OR/XOR Mixture display	
Reverse display	
Dot unit real-time bit image display	
FROM bit image definition	
Download character function	
Font Magnification function	
etc.	