


GU280X16G-7000

SIMPLIFIED DATASHEET

Features

Sim external dimension size. A good fit for devices that need to keep height down. With a long-width type VFD, this is also good for longer text, or messages display, etc.

Physical dimension

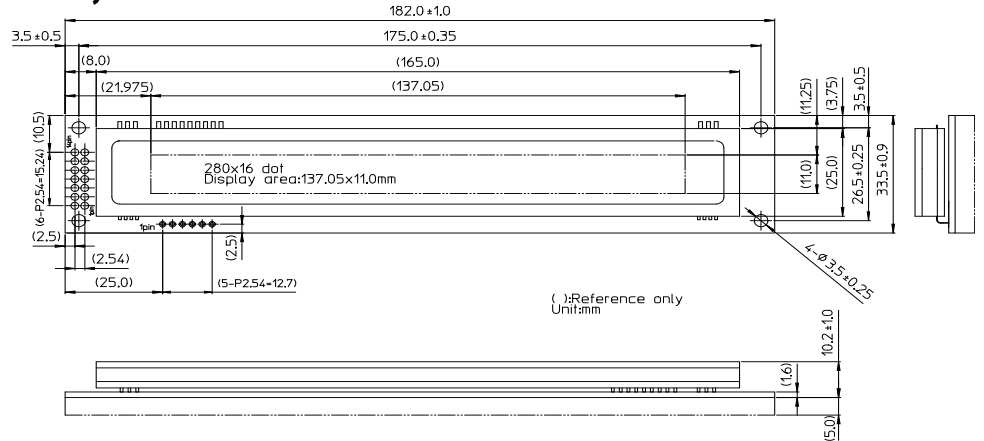

Get full specification



Click here to go to request form.

Specifications

Electrical Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Power supply voltage	VCC	4.75	5.00	5.25	VDC	-

Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
'L' Logic Input Current D0-D7./WR./RD /RESET	IIL1 IIL2	-	-	-0.15 -0.6	mA	VIN=0V
'H' Logic Input Current D0-D7./WR./RD./RESET	IiH	-	-	1.0	μADC	VIN=5V
Logic Input Voltage D0-D7./WR./RD./RESET	VIH VIL	0.8VCC 0	-	VCC 0.2VCC	VDC	-
Logic Output Voltage D7(Busy flag), PBUSY	VOH VOL	3.8 0	-	VCC 0.6	VDC	IOH=-1.5mA IOL=1.6mA
Logic input resistance SIN	RIN	3	-	-	KΩ	-
Logic Input Voltage SIN	VIH VIL	3.0 -15	-	+15 0.5	VDC	-
Logic Output Voltage SBUSY	VOH VOL	4.0 0	-	VCC 0.5	VDC	RL=3KΩ RL=3KΩ
Power Supply Current 1	ICC-1	-	400	520	mADC	All dots ON
Power Supply Current 2	ICC-2	-	330	430	mADC	All dots OFF
Power Supply Current 3	ICC-3	-	25	35	mADC	Display power OFF
Power Consumption	-	-	2.0	2.6	W	All dots ON

Optical Specifications

Parameter	Value
Number of Dots	4,480 (280 x 16)
Character numbers	40 x 2 / Max46 x 2 by 5 x 7 dot ANK
Display Area	137.05 mm x 11.0 mm
Dot Size (X x Y)	0.34 mm x 0.5 mm
Dot Pitch (X x Y)	0.49 mm x 0.7 mm
Luminance	350 cd/m ² Min. (500 cd/m ² Typ.)
Color of illumination	Green (Blue-Green)

Environmental Specifications

Parameter	Value
Operating Temperature	-40 ~ +85 degrees celsius
Storage Temperature	-40 ~ +85 degrees celsius
Operating Humidity	20 ~ 80% R.H. (non-condensing)
Storage Humidity	20 ~ 80% R.H. (non-condensing)
Vibration (non-operating)	10-55-10Hz, all amplitude 1mm, 30 minutes, X-Y-Z
Shock (non-operating)	392m/s ² (40G) 9ms X-Y-Z, 3 times each direction

Character display

Parameter	Value
Number of Dots	140 x 16 dots
Character font type	5 x 7 ANK, International font
Character width	Fixed/Proportional character format 1&2
Attribution	Character magnify, Reverse
Weight	About 75 g

Interface

Parallel(CMOS), Asynchronous Serial (RS232)

Pin Assignment (Parallel)

Pin No.	Signal	Pin No.	Signal
1	GND	2	Vcc
3	NC	4	RS
5	/WR	6	/RD
7	D0	8	D1
9	D2	10	D3
11	D4	12	D5
13	D6	14	D7(PBUSY)

(Asynchronous Serial)

Pin No.	Signal	Baud Rate Setting
1	Vcc	9600bps
2	SIN	19200bps
3	GND	38400bps*
4	SBUSY	115200bps
5	NC	(*:Default setting)
6	/RESET	

Functions

Parameter	Value
Control command	
Scroll display action	
Proportional Font function	
User-Windows function	
AND/OR/XOR Mixture display	
Reverse display	
Bit image display	
Character download function	
etc.	

