



-0.18 [0.007]

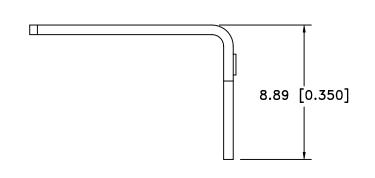



NOTES:

- 1. MATERIAL: 0.64mm [0.025"] THICK (24GA.) #302 STAINLESS STEEL-SPRING TEMPER.
- 2. FINISH: NICKLE PLATED 0.0005" THICK.
- 3. APPERANCE: NO BURRS-BREAK ALL SHARP CORNERS.

Tolerance (Except as noted)	M	Memory Protection Devices, Inc			
(Except as noted)		200 Broad Hollow Road, Farmingdale, New York 11735			
decimal				Scale	Drawn By B.S.
±.5 (.020)					Approved By T.B.
Fractional	Title NEGATIVE CONTACT FOR 20mm TO 30mm				
± .8 (.030)	COIN CELL BATTERIES				
Angular	Date	ate Drawing Number			
± 3°	05/29/01		ABG-96-NEG		