
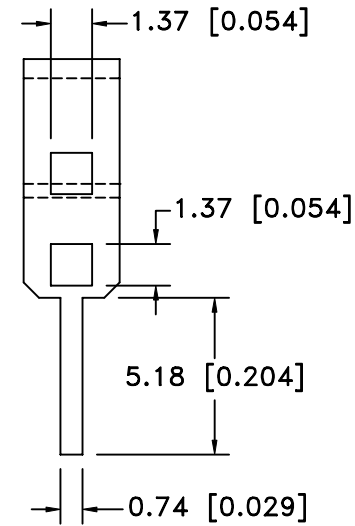
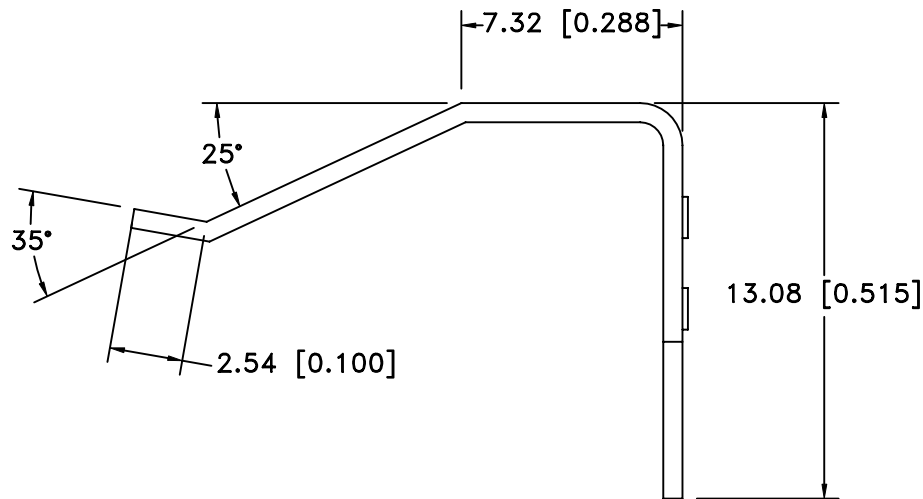



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|------|-----|-----------------|------|-----|-----|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

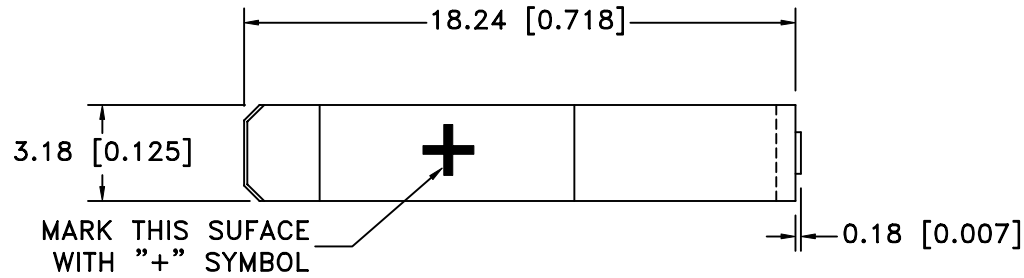

NOTES:

1. MATERIAL: 0.64mm [0.025"] THICK (24GA.) #302 STAINLESS STEEL-SPRING TEMPER.
2. FINISH: NICKLE PLATED 0.0005" THICK.
3. APPEARANCE: NO BURRS-BREAK ALL SHARP CORNERS.

| | | | |
|--------------------------------|---|-------------------------------------|-----------------------------------|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| decimal ±.5 (.020) | | Scale | Drawn By B.S. Approved By T.B. |
| Fractional ± .8 (.030) | Title POSITIVE CONTACT FOR 20mm TO 30mm COIN CELL BATTERIES | | |
| Angular ± 3° | Date 05/29/01 | Drawing Number ABG-96-POS | |