
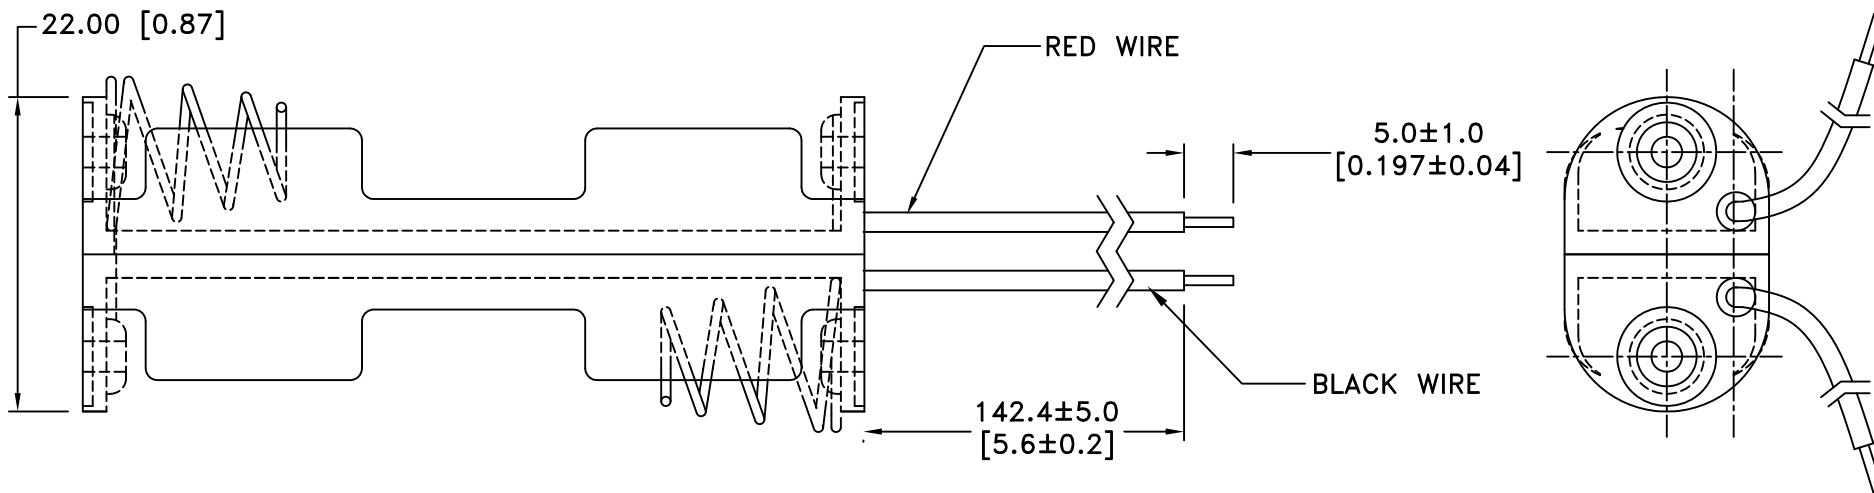



| Date | SYM | REVISION RECORD | AUTH | DR. | CK. |
|----------|-----|--|------|------|-----|
| 04/30/05 | A | (1) 51.80 was 50.80 (2) 14.00 was 12.95 (3) 22.00 was 20.32 (4) 5.0 was 3.18 (5) 142.4 was 152.4 | T.B. | B.S. | |
| 10/12/07 | B | Added "ROHS COMPLAINT" Updated Material spec. | T.B. | B.S. | |
| 03/15/13 | C | Updated to ROHS 2 COMPLAINT | T.B. | B.S. | |
| 06/14/13 | D | Updated title | T.B. | B.S. | |

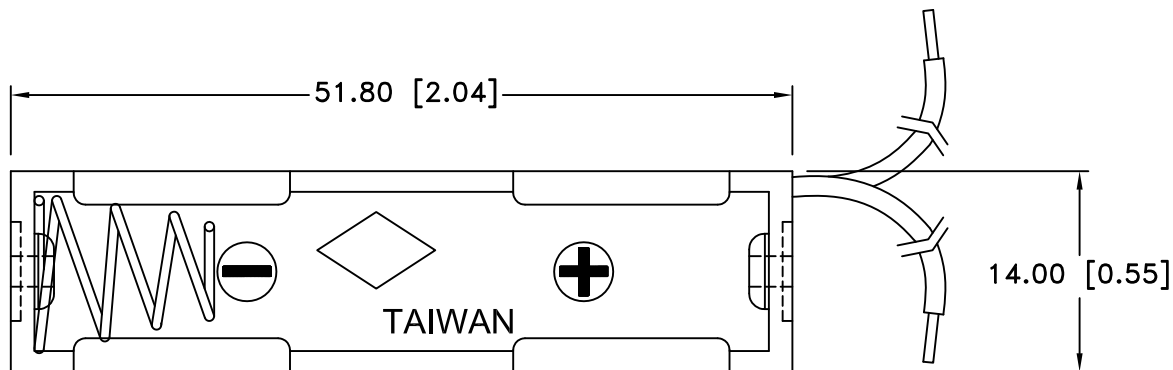

NOTES:

- Plastic material - Polypropylene, PP-1040
- Flammability Rating -UL94-HB, UL File NO. E216959
- Temperature Range: -10°C to +100°C
- Springs - Nickel Plated Spring Steel
- Wire - 26 AWG, UL1007, CSA
- Rivets - Brass, Nickel Plated
- Contact Resistance: Under 50mΩ for +/- contacts per EIA-540J000
- ROHS 2 COMPLIANT

| | | | |
|--------------------------------|---|---------------------------------------|--|
| Tolerance (Except as noted) |  Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735 | | |
| decimal ±.5 (.020) | Scale | Drawn By B.S. | |
| Fractional ± .8 (.030) | Approved By T.B. | | |
| Angular ± 3° | Title | TWO "AAA" CELL HOLDER WITH WIRE LEADS | |
| | Date | Drawing Number | |
| | 06/14/13 | BC22AAAW | |