

Date	SYM	REVISION RECORD	AUTH	DR.	CK.
5/05/07	Α	ADDED "ROHS COMPLIANT" UPDATED MATERIAL SPEC.	T.B.	B.S.	

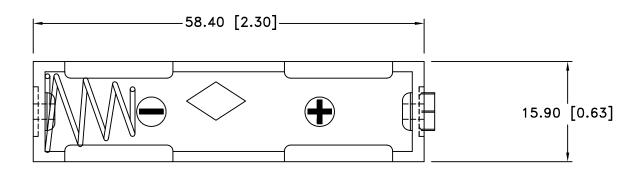

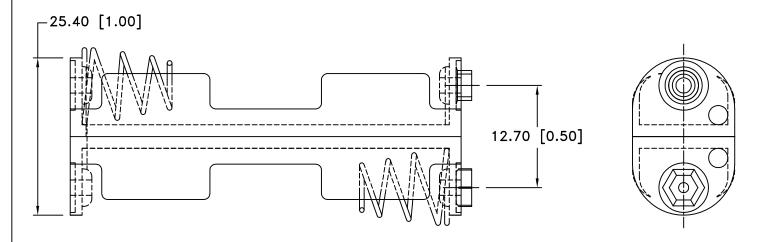

NOTES:

Plastic material - Polypropylene, PP-1040

Flammability Rating -UL94-HB, UL File NO. E216959

Temperature Range: -10 ℃ to +100 ℃ Springs - Nickel Plated Spring Steel Wire - 26 AWG, UL1007, CSA Rivets - Brass, Nickel Plated

9Volt Snaps - Brass, Nickel Plated

Contact Resistance: Under $50m\Omega$ for +/- contacts per EIA-540J000

DOLLO CONTRI IANI

Tolerance (Except as noted)		Memory Protection Devices, Inc					
(Daccept as notea)		200 Broad Hollow Road, Farmingdale, New York 11735					
decimal				Scale	Drawn By B.S.		
±.5 (.020)					Approved By T.B.		
Fractional	Title TWO "AA" CELL HOLDER						
± .8 (.030)							
Angular	Date		Drawing Number				
± 3°	5/05/07		BC22AASF				